



Model: SDA1000401  
SDA1000402  
SDA1000403

### Arminius Three Piece 8" Widespread Faucet

Front

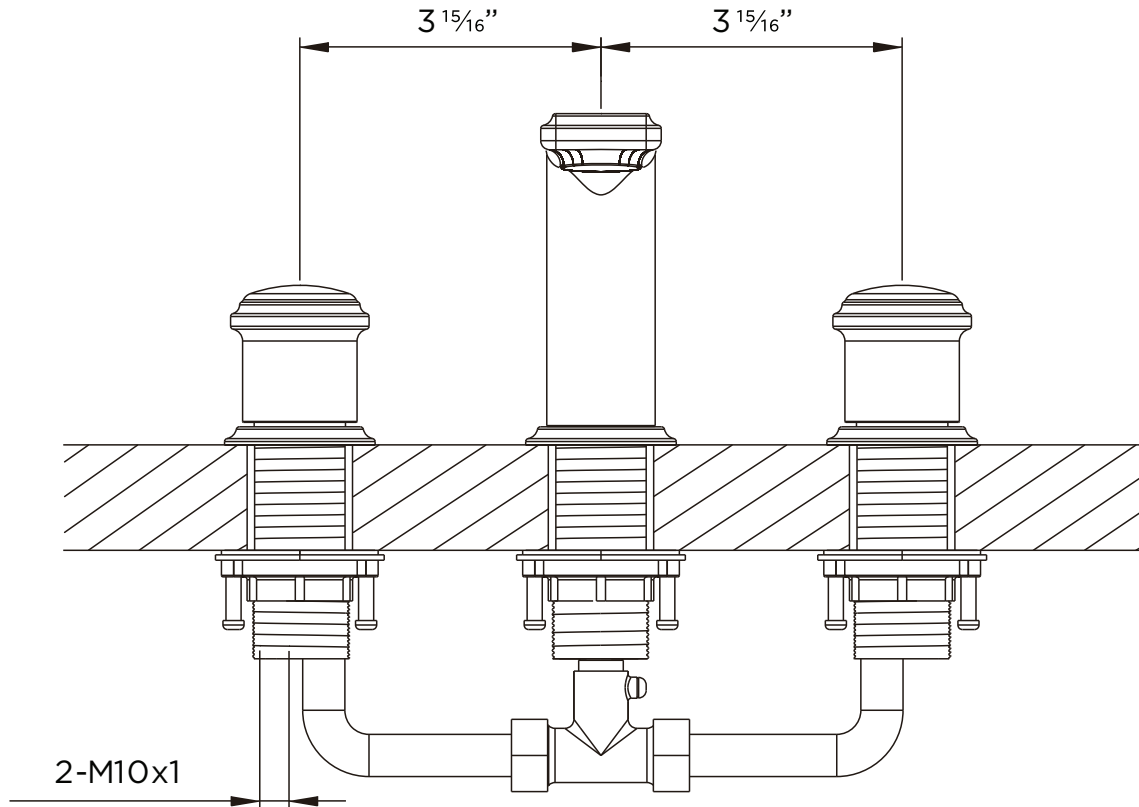

Side

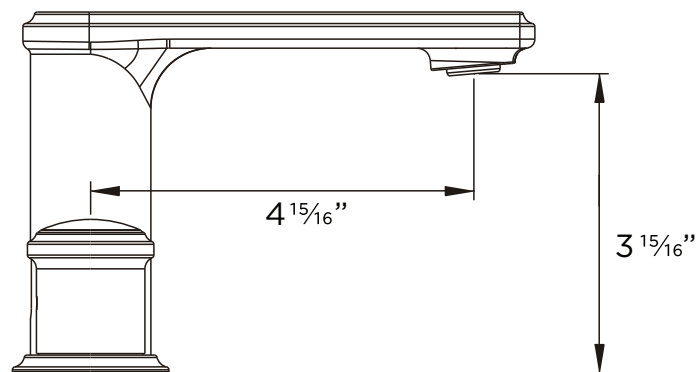

All measurements are approximate and may vary +/- 1/4"

# Maykke™

[www.maykke.com](http://www.maykke.com)

## Installation Guide




### Widespread Faucet

Before beginning please read all installation instructions and observe all local safety and building codes.

Inspect all products before installing. Contact Customer Service for any questions or concerns at 877.659.2858 or email: [support@maykke.com](mailto:support@maykke.com).

Consult a professional if you are unfamiliar with faucet installation. We accept no liability for damages to property or person during installation.


### TOOLS AND MATERIALS NEEDED:



ADJUSTABLE WRENCH



SILICONE SEALANT



DAMP CLOTH

### Installation:

1. If your faucet includes a brass T attached to the faucet, unthread and remove the T with any associated hardware.
2. Thread the silver mounting washer and rubber sealing gasket on the faucet body.
3. Apply a bead of silicone sealant to the underside of the faucet base and thread through the center mounting hole.
4. Thread the mounting hardware and brass T onto the pot pipe (hand tighten to secure).
5. Make sure your faucet is properly aligned, making any adjustments needed. Once you are happy with the placement, tighten it using your adjustable wrench.
6. Wipe away any excess sealant using your damp cloth.
7. If handles need assembly do so by screwing the lock nuts down to the end of the handle bodies.
8. After inserting the handle bodies through the mounting holes, thread the plastic slip washers and rubber sealing gaskets onto the handle bodies to secure.
9. Hand tighten the water lines to the main water supply, be careful not to cross the two during installation. Using wrench turn and additional  $\frac{1}{4}$  turn, being careful not to over tighten. Make sure there are no kinks or knots in the tubes.
10. Place the handle assemblies on the handle bodies. Make sure that both handles are in the off position and, using the set screw, tighten in place with provided Allen wrench.
11. Connect the main water supply to the faucet body.
12. Install drain according to manufacturer's instructions.
13. Once installation is complete, turn on the water supply, making sure that no water is leaking. Leave water on for approximately one minute to insure installation is correct.