SVANGE 8436DLLRR LED Medicine Cabinet - Specification Sheet www.kruggi



Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 7440 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 55W
- Electric Current: 0.45A
- Wattage: 55W

Model

- SVANGE 8436DLLRR Swinging Door
- Included models in this configuration: Cabinet 1=2436L Cabinet 2=1836L Cabinet 3=1836R Cabinet 4=2436R

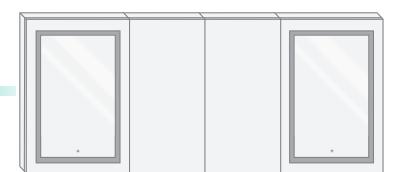


Electrical System


- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A



CABINET CONFIGURATION


• Included models in this configuration:

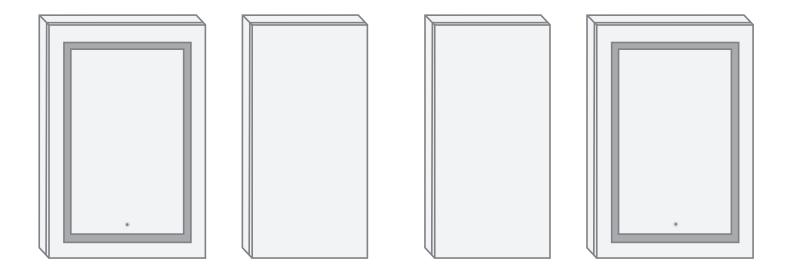

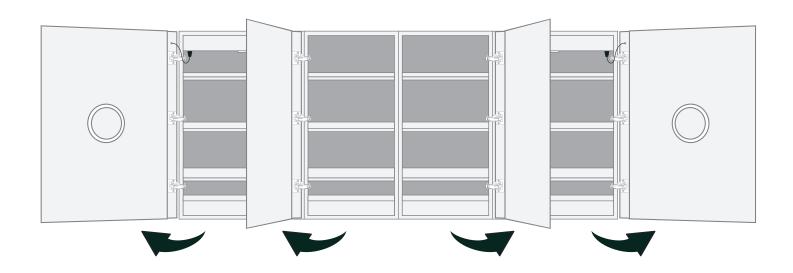





SVANGE 8436DLLRR LED Medicine Cabinet - Specification Sheet www.kruggusa.com

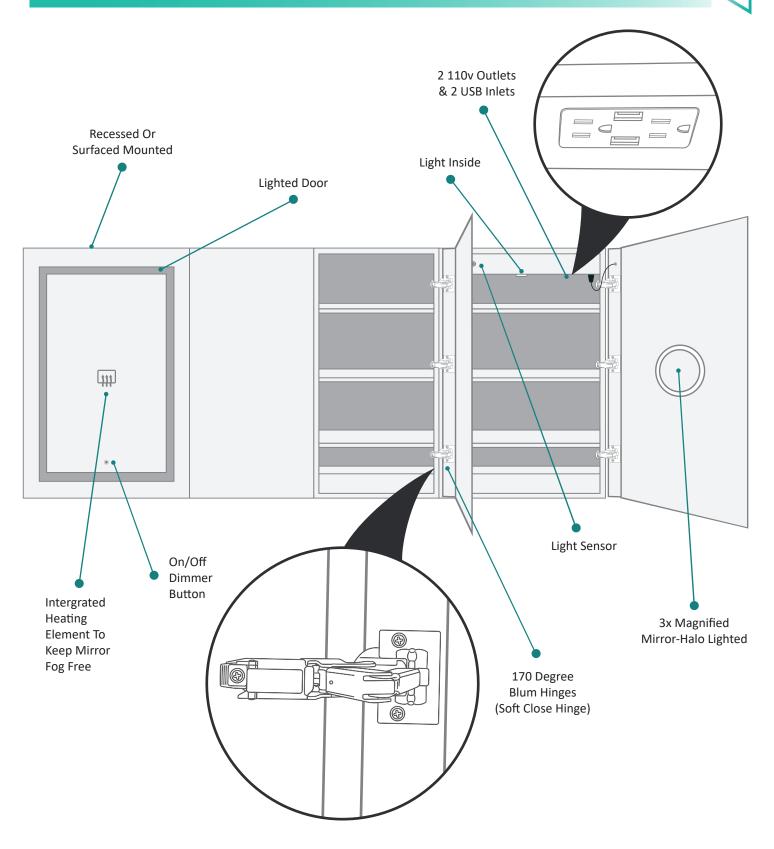



SURFACE MOUNT

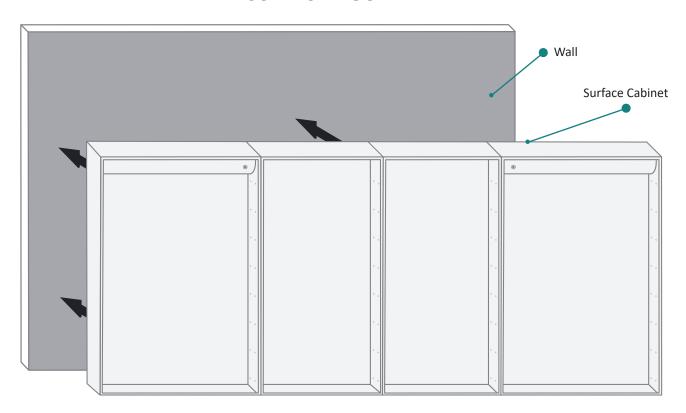

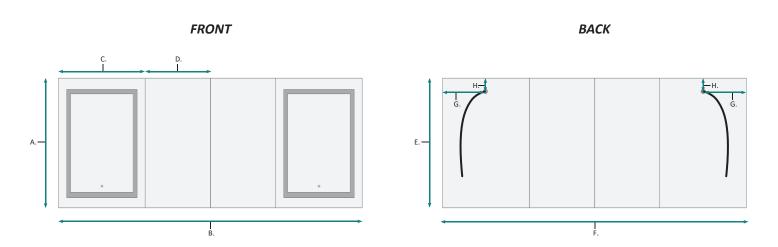


FRONT & BACKS


MODEL	А	В	С	D	E	F	G	н
SVANGE 8436DLLRR	36	84	24	18	34-1/2	78	11-1/4	1-1/8





RECESSED MOUNT

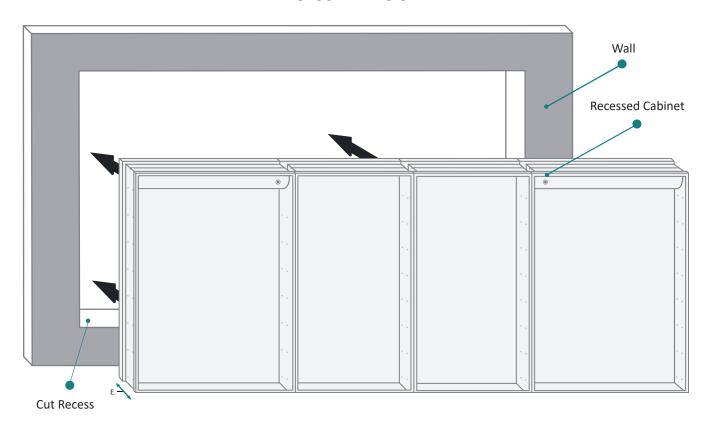

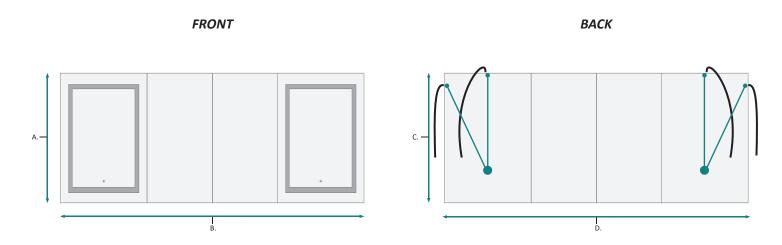


FRONT & BACKS

MODEL	А	В	С	D	E
SVANGE 8436DLLRR	36	84	34-1/2	78	3-7/8



RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

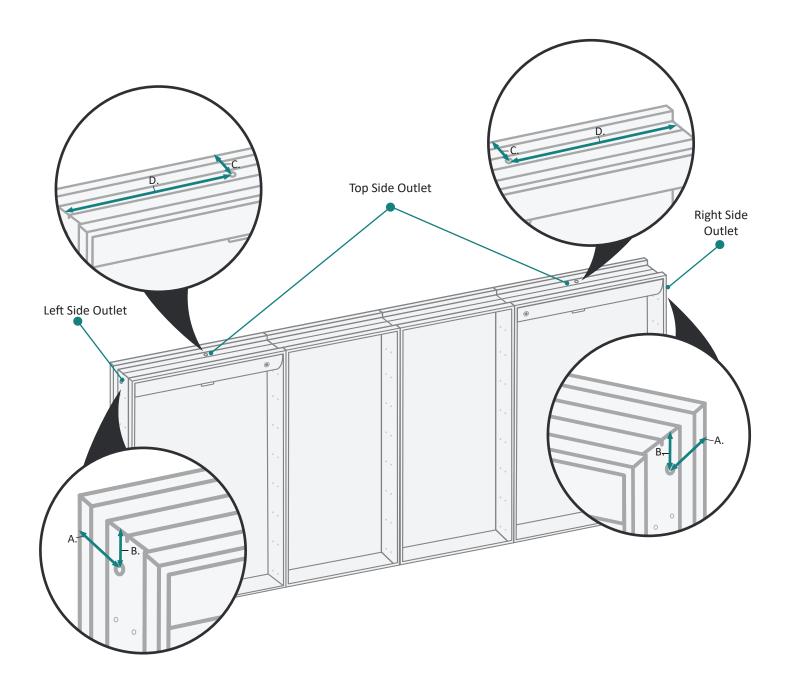


ELECTRICAL CORD LOCATIONS

MODEL	А	В	С	D
SVANGE 8436DLLRR	1-1/2	1-1/8	1-3/8	11-1/4






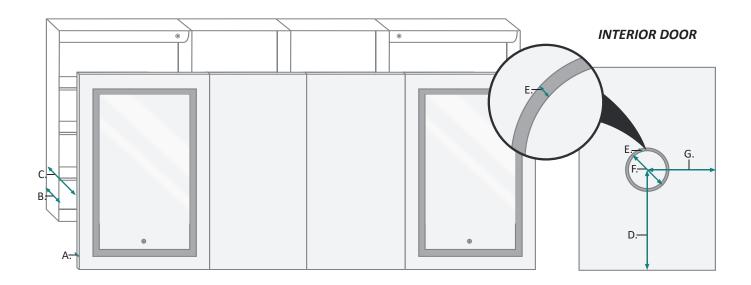

DOOR & CABINET

MODEL	А	В	С	D	E	F	G
SVANGE 8436DLLRR	7/8	3-7/8	4-3/4	18	3/8	5-1/4	11-1/4

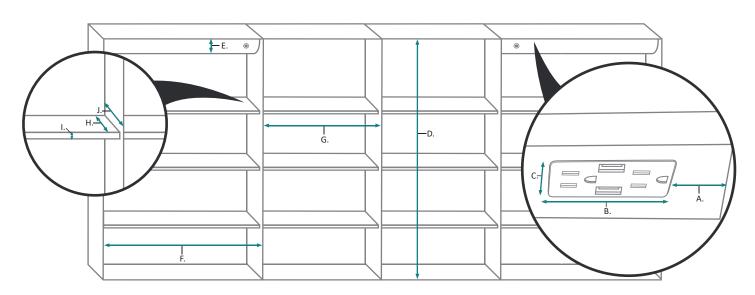

INTERIOR CABINET

MODEL	А	В	С	D	E	F	G	Н	1	J
SVANGE 8436DLLRR	3-3/4	5-5/8	1-1/4	32-1/4	2-1/4	22-1/4	16-1/4	2-3/8	3/8	3-5/8