# **KOHLER**<sub>®</sub>

#### Features

- Vitreous china.
- Wall-mount.
- Deep squared basin.
- No faucet holes; requires wall-mount faucet.
- 1-1/2" (38 mm) top spud.
- Blow-out action flushing rim.
- 21-1/2" (546 mm) x 25" (635 mm)
- Strainer not included.

#### **Recommended Products/Accessories**

K-8935 Stainless Steel Rim Guard K-13864 Sink Strainer K-23726 Drain treatment K-23725 Cast iron cleaner

#### **Optional Products/Accessories**

K-11352 Disposal Flange with Stopper

#### **Included Components**

Additional Components: 1 1/2" (38mm) top stud



### Codes/Standards

ASME A112.19.2/CSA B45.1

#### KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**


Color tiles intended for reference only.

Color Code Description

0 White



## Camerton<sup>™</sup> Service Sink K-12867

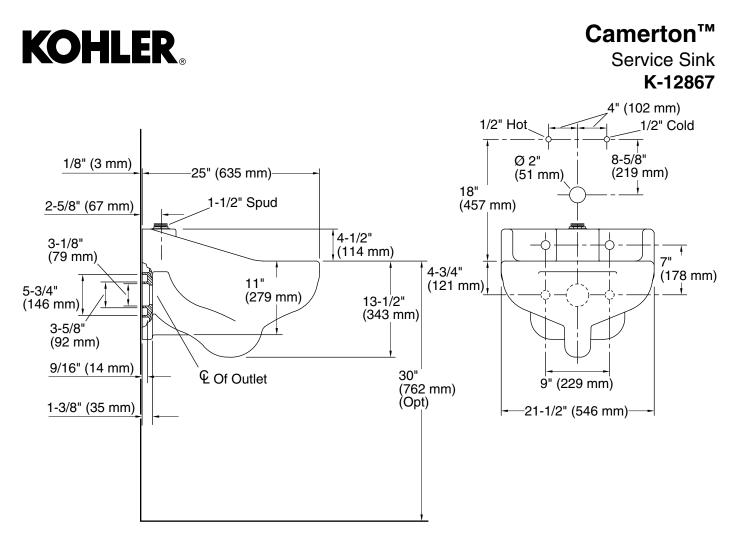

#### **Technical Information**

All product dimensions are nominal.Bowl configuration:SingleInstallation:Top-mountBowl area (Only):Length: 18" (457 mm)Width: 18" (457 mm)Water depth: 6-1/4" (159 mm)

#### Notes

Install this product according to the installation instructions.

Minimum flowing pressure required: 25 psi (172.4 kPa)

Minimum flow rate required: 25 gpm (94.6 lpm)

