


TUBE ARCHITECTURAL DS-WS05-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

FEATURES


- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

SPECIFICATIONS

Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, ETL & cETL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

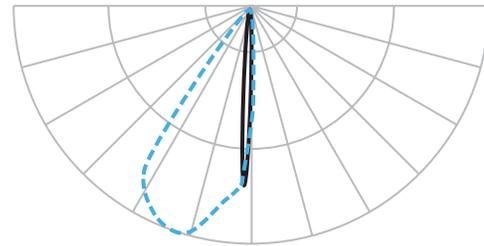

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish							
Single	DS-WS	05	5"	11W	U	6°	27	2700K	85	125	1182	B	Towards the wall			BK Black WT White BZ Bronze GH Graphite
							30	3000K	85	145	1363					
							35	3500K	85	150	1411					
							40	4000K	85	155	1462					

DS-WS05-U ___ B-___

Example: DS-WS05-U30B-WT

waclighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

TUBE ARCHITECTURAL DS-WD05-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____


Location: _____

SPECIFICATIONS

Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, ETL & cETL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

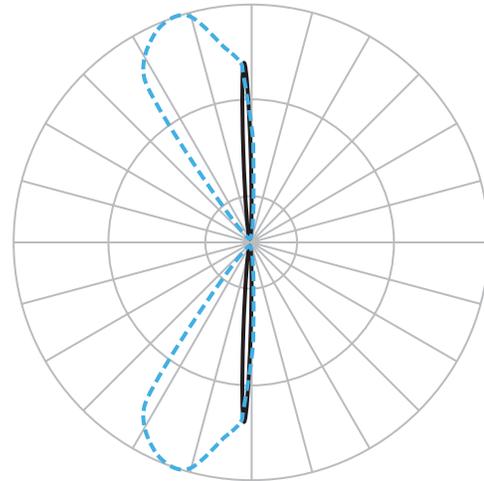


PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

FEATURES

- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish
Double	DS-WD	05	5"	22W	U	6°	27 2700K 85 125 x2 1182 x2 30 3000K 85 145 x2 1363 x2 35 3500K 85 150 x2 1411 x2 40 4000K 85 155 x2 1462 x2	B Towards the wall	 BK Black WT White BZ Bronze GH Graphite

DS-WD05-U ___ B-___

Example: DS-WD05-U30B-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

TUBE ARCHITECTURAL DS-WS06-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

FEATURES


- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

SPECIFICATIONS

Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, ETL & cETL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

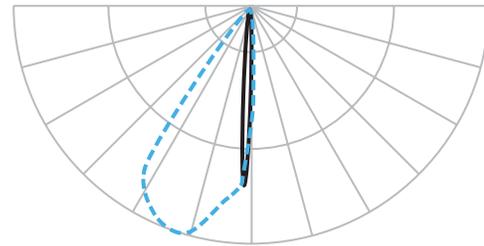

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish						
Single	DS-WS	06	6"	11W	U	6°	27	2700K	85	110	1239	B	Towards the wall		BK Black WT White BZ Bronze GH Graphite
							30	3000K	85	130	1428				
							35	3500K	85	130	1478				
							40	4000K	85	135	1532				

DS-WS06-U ___ B- ___

Example: DS-WS06-U30B-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

TUBE ARCHITECTURAL DS-WD06-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____


Location: _____

SPECIFICATIONS

Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, ETL & cETL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

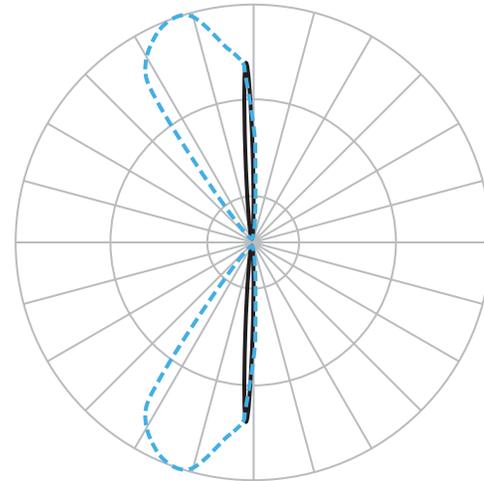


PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

FEATURES

- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish
Double DS-WD	06 6"	22W	U 6°	27 2700K	85	110 x2	1239 x2	B Towards the wall	 BK Black WT White BZ Bronze GH Graphite
				30 3000K	85	130 x2	1428 x2		
				35 3500K	85	130 x2	1478 x2		
				40 4000K	85	135 x2	1532 x2		

DS-WD06-U ___ B- ___

Example: DS-WD06-U30B-WT

waclighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760