

# ASSEMBLY INSTRUCTIONS

## Description: Ventura Lounge






### Important safety instructions:


- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

### Pre-assembly:

- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

### Parts List

Item	Description		QTY
P1	Back Frame		1
P2	Seat cushion		1
P3	Right Arm		1
P4	Left Arm		1
P5	Front Stretcher		1

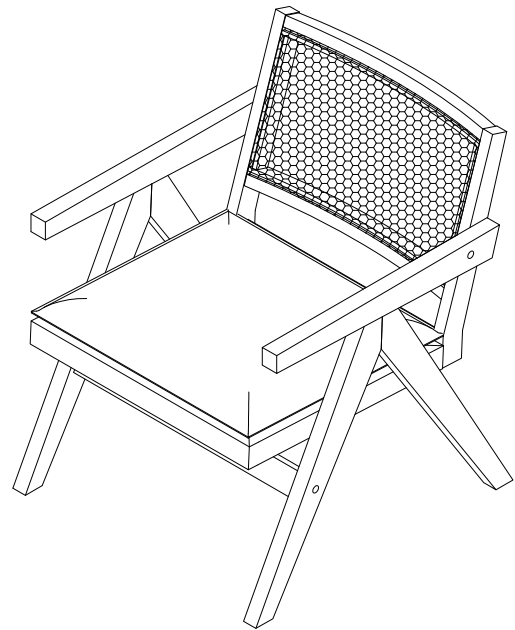

### Hardware List

Item	Description		QTY
H1	Bolts Ø1/4"*1-1/2"		10
H2	Lock Washers 1/4"		10
H3	Big flat washers 1/4" (19mm)		4
H4	Small flat washers 1/4" (12mm)		6
H5	Allen Wrench 1/4"		1
H6	Wooden Plugs		6

### DISCLAIMER:

WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE. SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING IMPROPERLY ASSEMBLED AFTER PURCHASE.

### Assembly Procedures:



Step 1. Assemble the lounge on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach seat cushion (P2) to back frame (P1) as shown below. Loosely tighten the bolts with Allen wrench (H5).

(H1)x2 Bolts Ø1/4"\*1-1/2"

(H2)x2 Lock Washers 1/4"

(H4)x2 Small flat washers 1/4" (12mm)

(H5)x1 Allen Wrench 1/4"

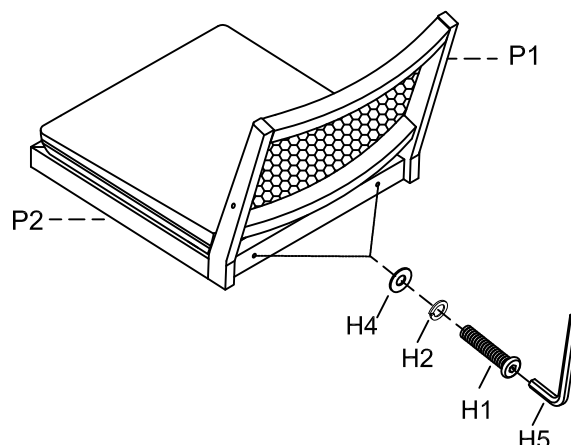

Step 2. Loosely attach left arm (P4) to seat cushion (P2) and back frame (P1) as shown below. Loosely tighten the bolts with Allen wrench (H5).


(H1)x3 Bolts  $\varnothing 1/4"$  \*1-1/2"

(H2)x3 Lock Washers 1/4"

(H3)x2 Big flat washers 1/4" (19mm)

(H4)x1 Small flat washers 1/4" (12mm)

(H5)x1 Allen Wrench 1/4"

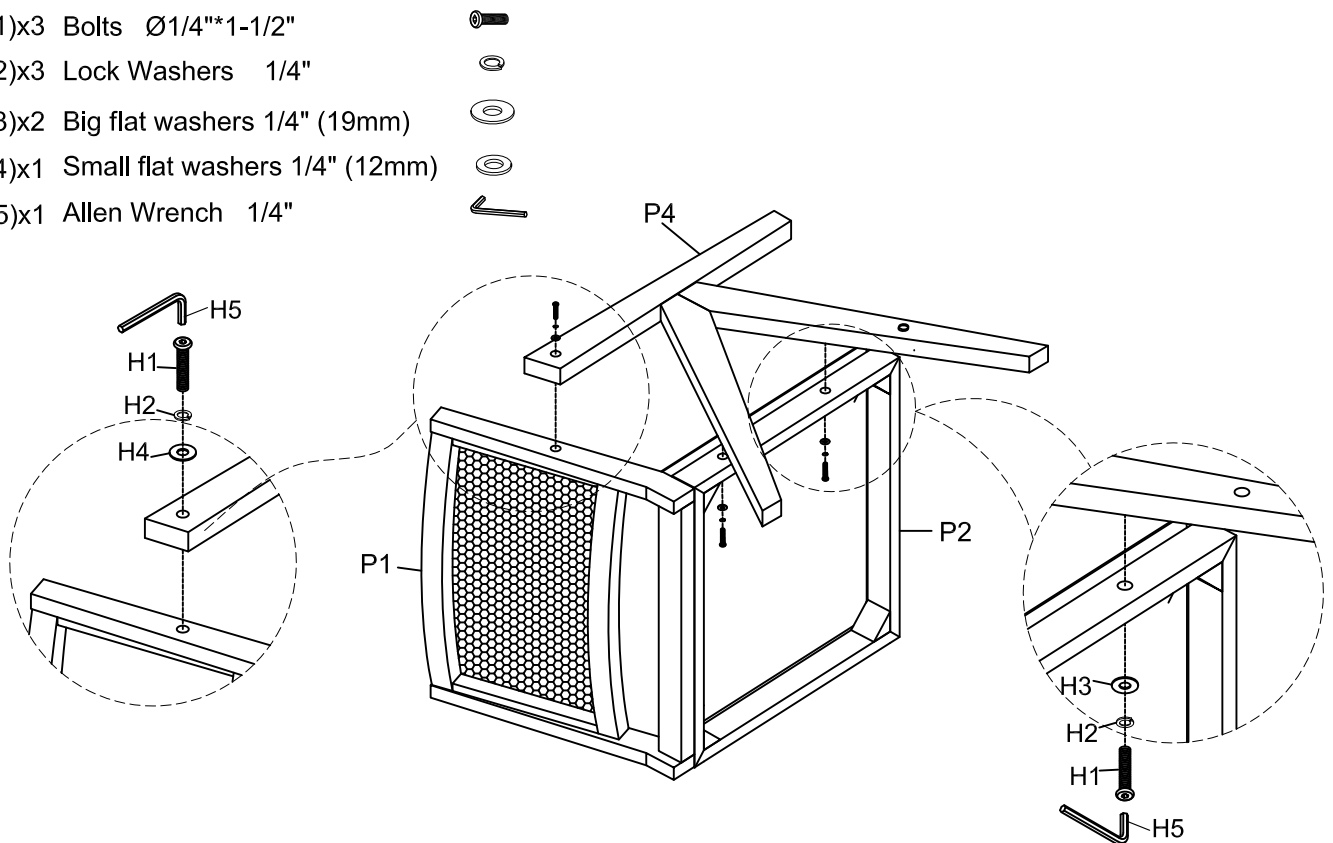

Step 3.

1) Insert the dowels on the ends of front stretcher (P5), then attach the front stretcher (P5) between right arm (P3) and left arm (P4).

2) Loosely tighten right arm (P3) to the front stretcher (P5), seat cushion (P2) and back frame (P1) as shown below.


(H1)x4 Bolts  $\varnothing 1/4"$  \*1-1/2"

(H2)x4 Lock Washers 1/4"

(H3)x2 Big flat washers 1/4" (19mm)

(H4)x2 Small flat washers 1/4" (12mm)

(H5)x1 Allen Wrench 1/4"

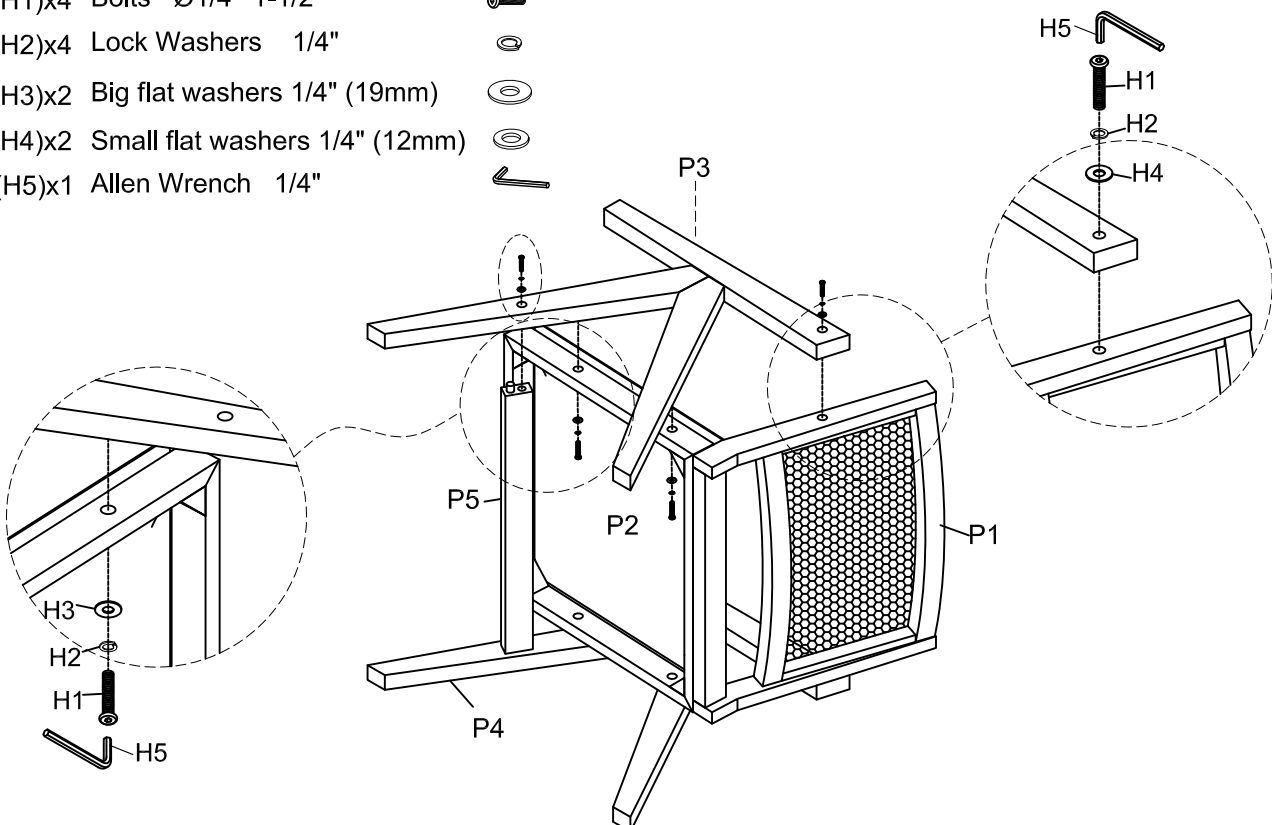

Step 4. Loosely attach the assembled left arm (P4) to front stretchers (P5).

(H1)x1 Bolts  $\varnothing 1/4" \times 1-1/2"$




(H2)x1 Lock Washers 1/4"



(H4)x1 Small flat washers 1/4" (12mm)




(H5)x1 Allen Wrench 1/4"

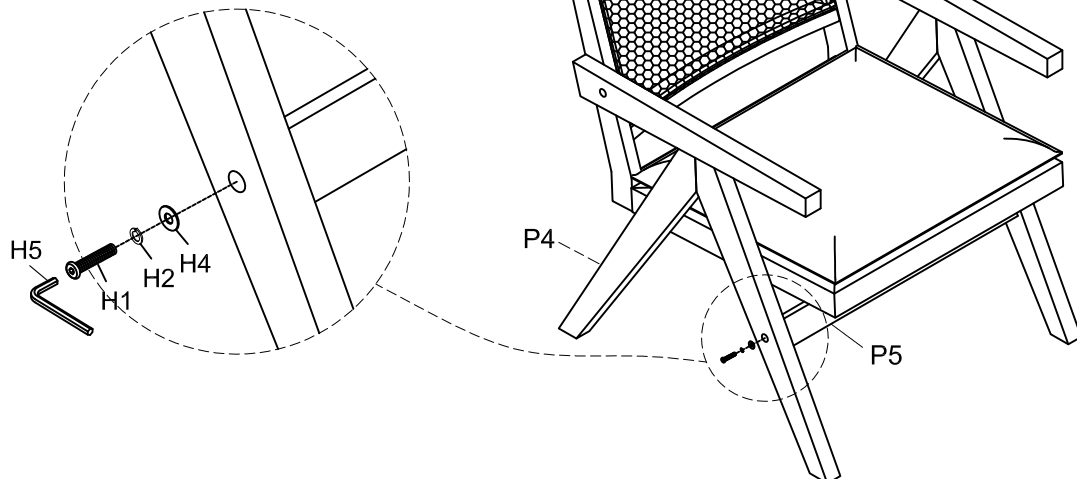

Step 5.

- 1) Make sure the assembled lounge is level and securely tighten all the bolts with Allen wrench (H5).
- 2) Attach wooden plugs (H6) to each exposed bolt holes, tighten with rubber hammer to knock the wooden plug till its tighten. **Note:** use a soft cloth between the wooden plug and hammer to prevent damage to wooden plug finish.
- 3) Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

(H6)x6 Wooden Plugs

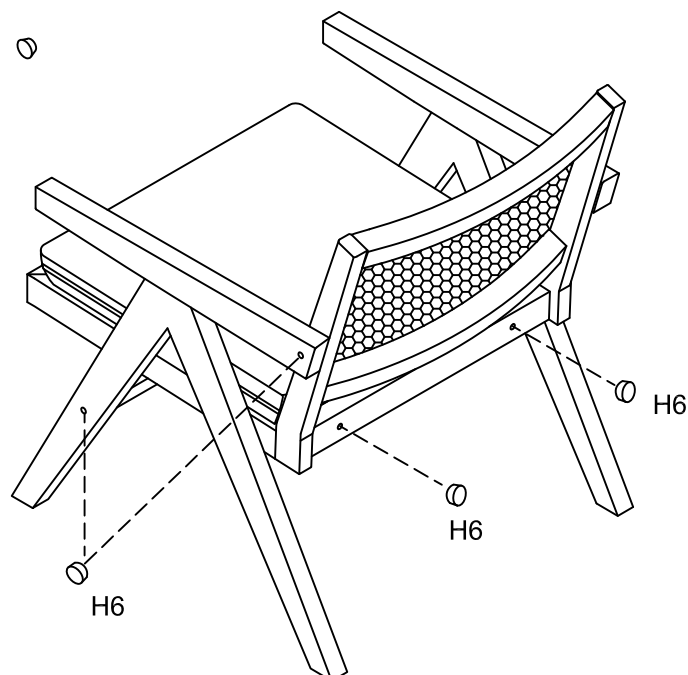

**ADDITIONAL NOTE ABOUT SAFETY:**

**BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE.**

**THEY SHOULD BE INSPECTED AT LEAST EVERY 3 MONTHS AND RE-TIGHTENED AS NEEDED TO PREVENT DAMAGE OR INJURY, AND ENSURE STABILITY.**

Thank you for your purchase