

### Features

- 7-7/16" (189 mm) diverter spout.
- 11 gpm maximum flow rate at 45 psi.
- Remote-valve handle allows for ease of access.
- Single lever handle allows for simultaneous on/off activation and temperature setting.
- High-temperature limit setting for added safety.
- MasterClean™ sprayface resists hard water buildup and is easy to clean.
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.

### Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Coordinates with Pitch® bath and shower trim.
- Deck- or bath-mount.

### Recommended Products/Accessories

K-23723 Faucet cleaner

### Included Components

Additional Components:

- 60" metal hose
- Handshower



Certified by  
IAPMO R&T

### Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



- |    |                         |
|----|-------------------------|
| CP | Polished Chrome         |
| BN | Vibrant® Brushed Nickel |

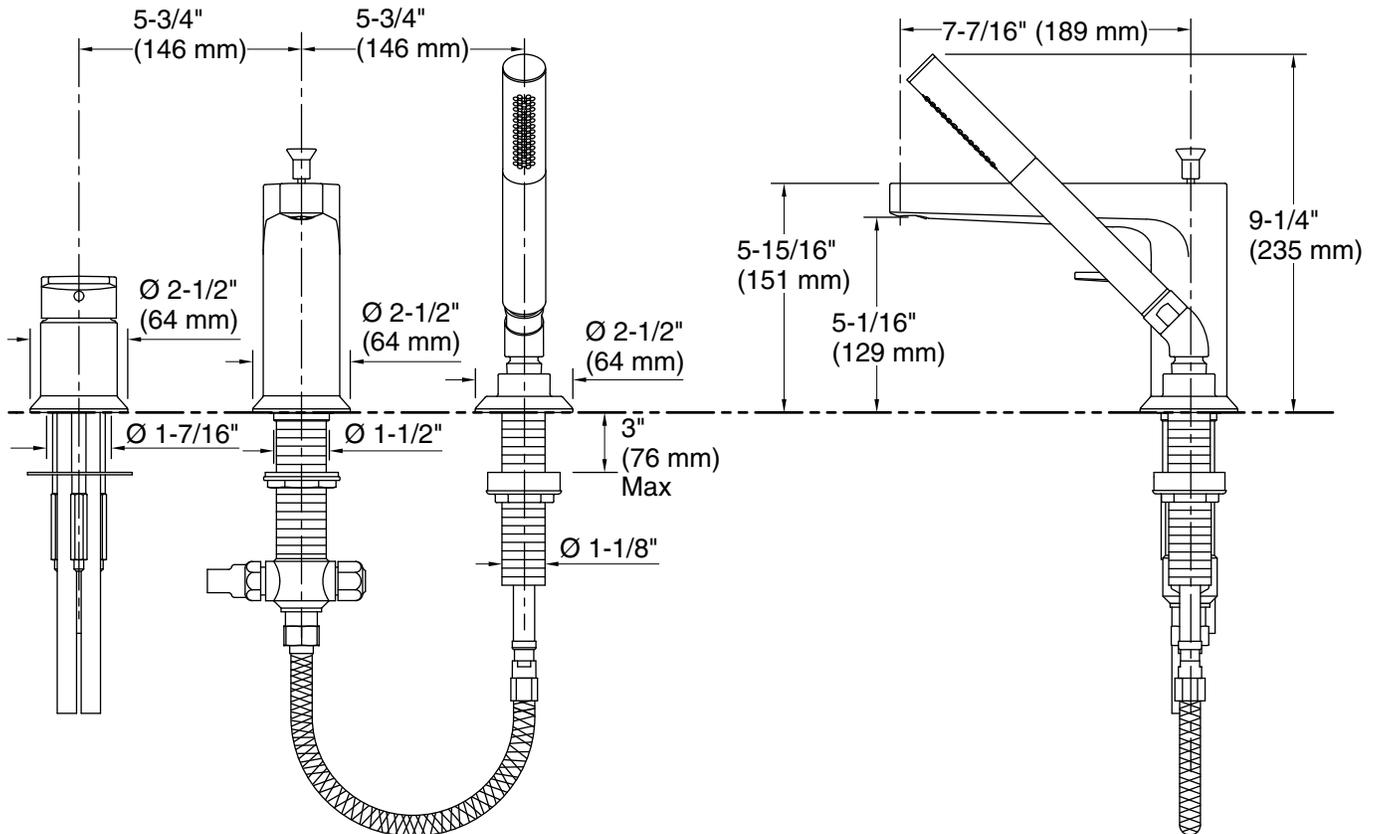

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 11 gal/min (41.6 l/min)

Pressure: 45 psi (3.1 bar)

Valve body: Machined-brass

Drain included: No

#### Spout:

Spout reach: 7-7/16" (189 mm)

#### Handshower:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 45 psi (3.1 bar)

### Notes

Install this product according to the installation instructions.

**WARNING:** Risk of personal injury. Do not install the bath faucet in an area where it may inadvertently be used for support by the bather.