

Project: _____ Type: _____ Quantity: _____

Note: _____ SKU#: SP - BL4 - SF - 04 - ____ - ____ - ____ - ____ - ____

Description

The Bullet pendant includes a spun aluminum shade with a painted exterior and a contrasting metal finish interior.

Features

- Screw-in optical acrylic light guide
- Suspends from an 8' adjustable cable
- Damp location rated
- Replaceable light source



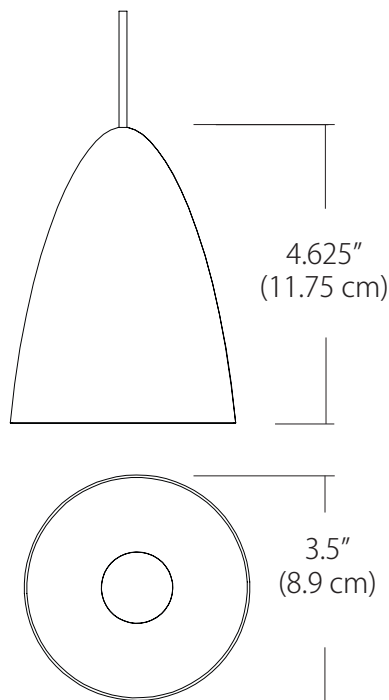
Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (Standard)
- Fixture Wattage: 4.68W (single pendant w/SP5 Canopy)
- Fixture Lumens: 64.5 Lm (single pendant w/SP5 Canopy)
- Fixture Weight: 1.4 lbs (.63 kg)
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- Color Temperature: 2700K, 3000K, 3500K, or 4000K
- Light Source Wattage/Lumens: 2W/27 Lumens or 3W/41 Lumens
- Finishes: BC - Black w/Copper Interior, WG - White w/Gold Interior
- Mounting: See page 2 for mounting options

Dimensions



Diffusers



BC - Black w/
Copper Interior



WG - White w/
Gold Interior

ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Light Source Wattage	Mounting	Length
SP	BL4	SF	04		30K	2W	SP5	
SP Small Pendant	LGD Light Guide	SF Short Frosted	04 4" Height	Standard BC Black/Copper WG White/Gold	27K 2700K 30K 3000K 35K 3500K 40K 4000K	2W 2Watts/27Lm (recommended for multiple pendant application) 3W 3Watts/41Lm (recommended for single pendant application)	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter	96" Standard (Change Length for custom cable length in inches)
Example: SP-BL4-SF-04-BL-30K-2W-SP5-96					(30K Standard)		(See page 2 for mounting information)	

Finish





Finish		
		
BC		
WG		
	BC - Black with Copper Interior	WG - White with Gold Interior

Light Source Wattage

Wattage	
	
2W	
3W	
	2W = 2 Watts / 27 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter). 3W = 3 Watts / 41 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy). (Lumens measured at 3000K)

Mounting

Mounting	
	
SP5	SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)
SP2	SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) Cable with modular connector (and optional wire harness) attaches to a remote driver
MPC	MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
JTA	JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter

















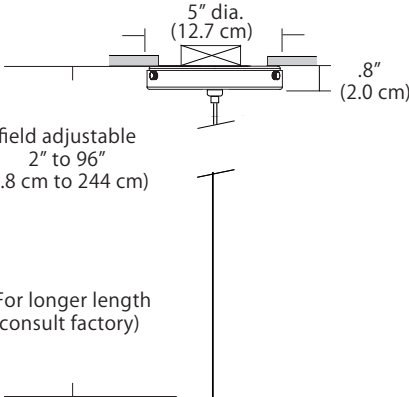
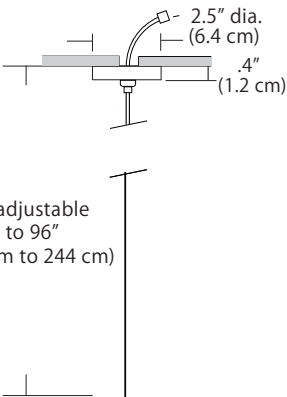
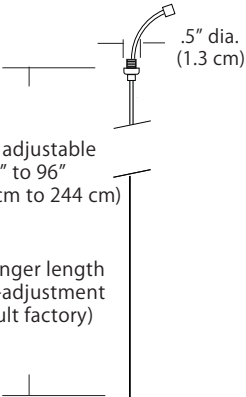
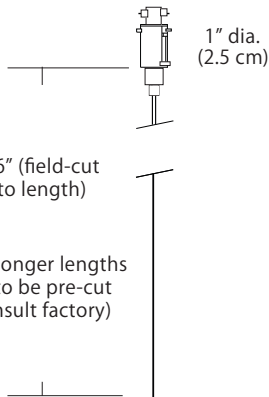
SP5 5" Canopy (integrated driver)	SP2 2.5" Fascia Canopy (driver sold separately)	MPC Multi-Port Connector (canopy and driver sold separately)	JTA JackTrack Adapter (track and driver sold separately)
			

Max Cable Length

Length	
	
96" (Standard)	96" (Standard) (Change Length for custom cable length, in inches)
Custom	Factory pre-configuration of cable length is available. Consult factory for details.

For full specifications and ordering information, see blackjacklighting.com

(# symbol indicates additional specification required)


Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver required) .4" 1.3 cm	
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 9 Port  4.8" OC 12.2 cm 23.9" 60.7 cm 25 Port	 21.5" 54.6 cm 2.5" 6 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 7.5" OC 19 cm 3" OC 7.6 cm 37.7" 97.8 cm 10 Port  4.1" OC 10.4 cm 2.5" OC 6.4 cm 37.7" 97.8 cm 18 Port	 4.7" 11.9 cm 2.5" 6 cm 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 4.4" OC 11.2 cm 2.8" 7 cm 21.8" 56 cm 5 Port  4.4" OC 11.2 cm 2.8" 7 cm 48" 123 cm 11 Port	 2.8" 7 cm 1.4" 4 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. 27.9 cm 7.4" OC 18.8 cm 3 Port  11" dia. 27.9 cm 2.9" OC 7.4 cm 9 Port	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. 50.8 cm 14.5" OC 36.8 cm 3 Port  20" dia. 50.8 cm 6.4" OC 16.3 cm 12 Port	 18" dia. 45.7 cm 2.5" 6 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack #-#-# 48" JackTrack #-#-# 94" JackTrack #-#-#	 23" 58.4 cm 1.75" 4.5 cm  47" 119.4 cm 1.75" 4.5 cm  94" 238.8 cm 1.75" 4.5 cm	 1.38" 3.5 cm 1.75" 4.5 cm (Integrated or Remote Driver)	BL Matte Black WH White

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quatro

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)

4S (4' 2x2 / 9 Port)
MSQ-2409-#-#-4S-#-#



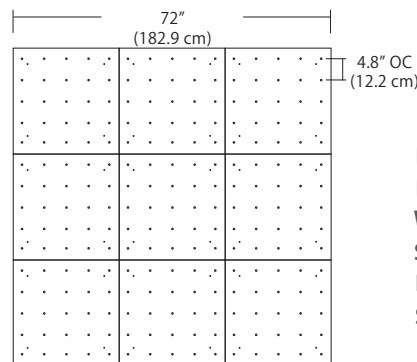6S (6' 3x3 / 25 Port)
MSQ-2425-#-#-6S-#-#




BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver


MPC

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)

4L (4'x2' / 9 Port)
MSQ-2409-#-#-4L-#-#



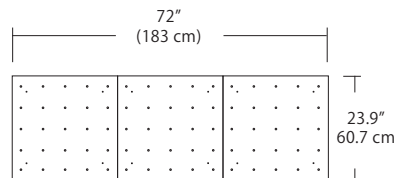
6L (6'x2' / 25 Port)
MSQ-2425-#-#-6L-#-#



Duo


Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)

6L (6'4"x6" / 10 Port)
MSD-3810-#-#-6L-#-#



MPC

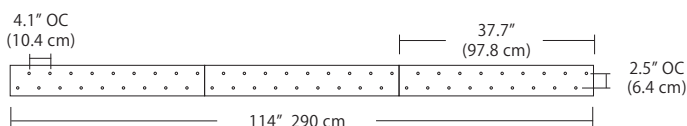
9L (9'6"x6" / 18 Port)
MSD-3818-#-#-9L-#-#




BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver

Solo

Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)




Solo (L) Configuration




Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

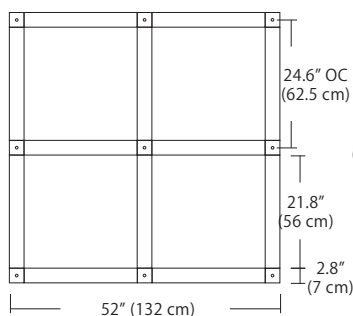MPC



Solo 48" Grid Configuration

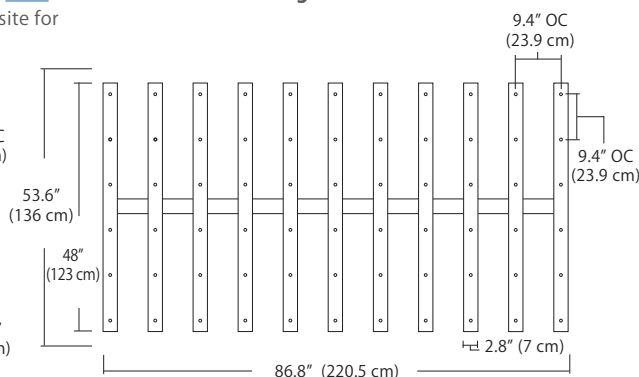

BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver