

PCOWP SERIES

LED Glass Wall Pack

Specifications:

Features:

- Borosilicate glass refractor softens lamp image and provides uniform distribution
- Cast aluminum frame holds lens and seals to housing gasket with two stainless steel screws
- Door assembly hinges to side on 50LED units; hinges down on 100LED units
- Cast aluminum housing with three ½" conduit entries (on top and sides), for button photocontrol or surface conduit
- All units have dark bronze powder paint finish
- Operating temperature range of -30°C to 40°C
- 4000K color temperature
- Universal input voltage 120-277V, 50/60V
- 50 LED: 4888 Lumens
- 100 LED: 10151 Lumens

Application:

The PCOWP Series is intended for perimeter lighting for safety and security. Can be applied for use on commercial buildings, self storage, parking garages, and other multi-use applications.

Compliances:

UL 1598 for use in wet locations



Warranty:

5 year warranty (Terms and Conditions Apply)

Catalog number:

Base	Lamp	Finish
PCOWP	50LED - LED, 53Watts 100LED - LED, 97 Watts	20 - Bronze


Photometry:

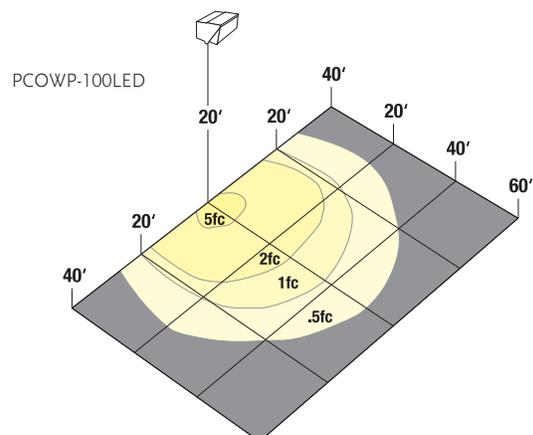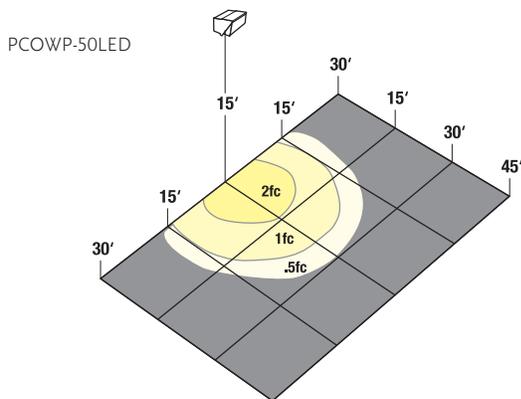

Images:



Dimensions:

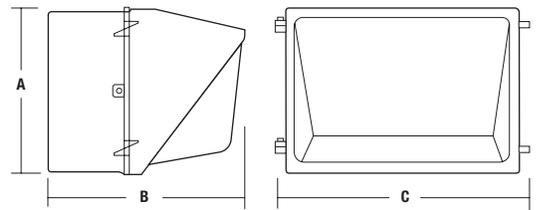

PCOWP-50

- A:** 9" (229 mm)
- B:** 7 ¼" (184 mm)
- C:** 13" (330 mm)

PCOWP-100

- A:** 9" (229 mm)
- B:** 13" (330 mm)
- C:** 17" (432 mm)