

## WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.  
 WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.  
 INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.


## CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.  
 To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.  
 Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.


## NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- \*The external flexible cable or cord of this lamp cannot be replaced  
 If the cord is damaged, the lamp shall be destroyed

## Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	machine screw		2X	F	Shade		1X
B	mounting bracket		1X	G	socket ring		1X
C	machine screw		2X	H	bulb		1X
D	machine screw		3X				
E	Body		1X				

**Model#: JYL7575A/JYL7575B**  
**Product Dimensions: 8"WX9"H X 18.5"E**


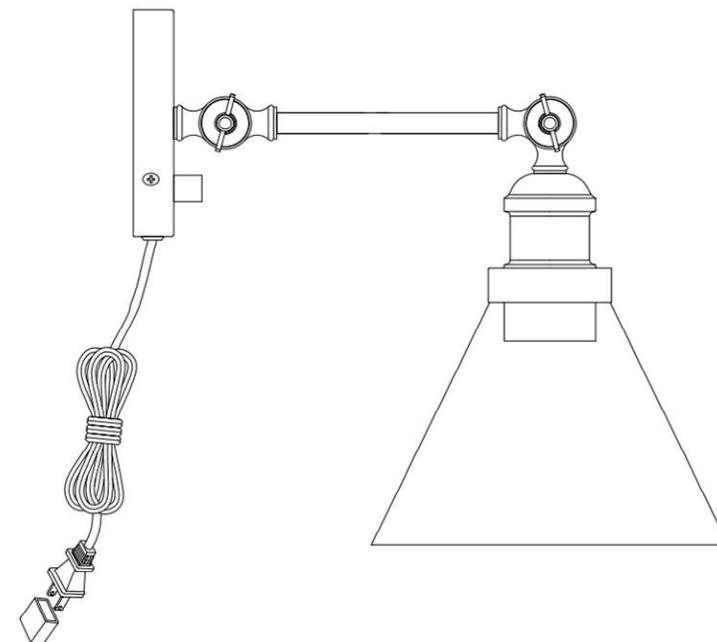


## PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 20 minutes.

**PLEASE USE ON/OFF TYPE "A" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED BULB 9-WATT  
THERE IS LED 4-WATT BULB IN THE BOX**

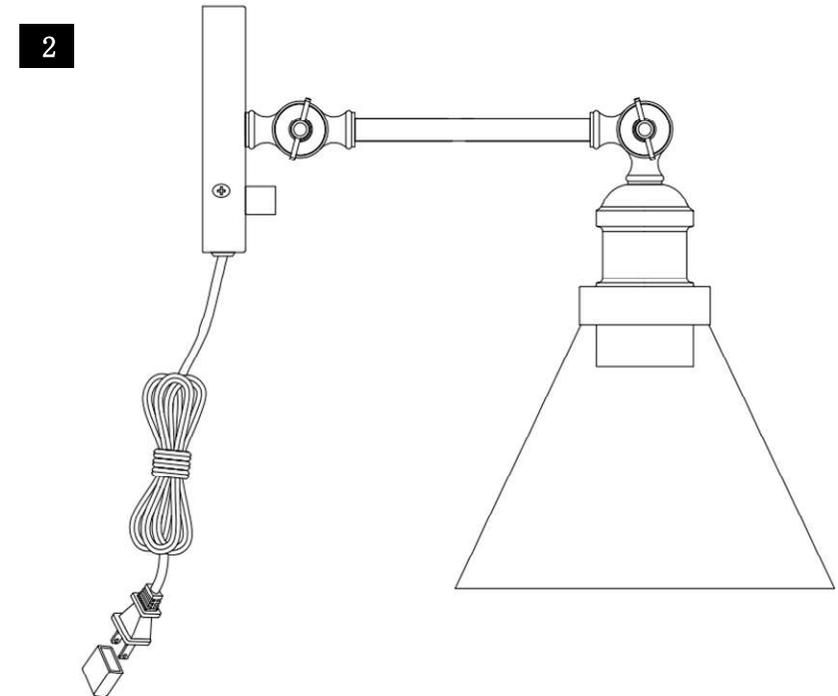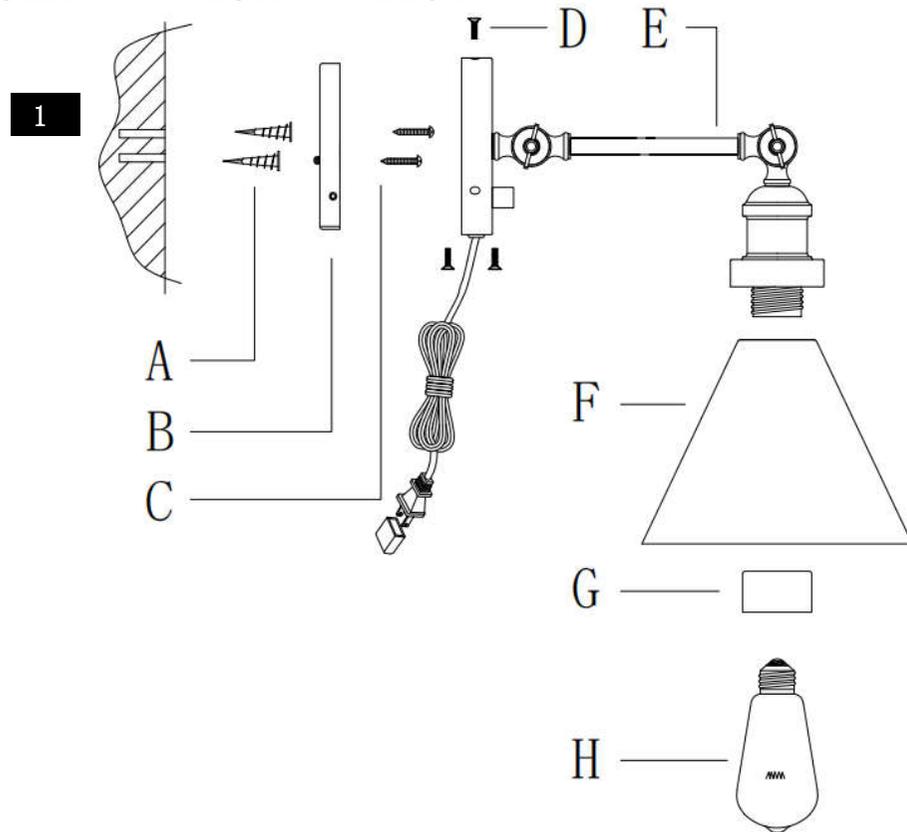

### Step 1

1. Install and fix the machine screws(A) to the holes in the wall.
2. Orient the back plate(B) so that the machine screw(A) protruding go into the holes in the back plate(B), then secure it with the screwed ball(C)
3. Put the lamp body(E) onto the mounting bracket and tighten with screw(D)
4. Put the glass shade(F) on socket,then fasten it by socket ring(G)
5. Install bulbs(H). Be sure to use light bulb(H) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.

### Step2

- Put the light on a level surface to check if everything is stable.

**ENJOY YOUR LAMP**