



# ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.  
However, the installation instructions do apply to this product.

## 5498

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

### ASSEMBLING THE FIXTURE (Fig.2)

Carefully unpack new fixture and lay all the parts on a clear surface.

1. Return the assembled arms(G) to suitable position.
2. Attach the column (L) to the bottom pipe screw of the fixture body, by turning it clockwise until tight. Attach the arm(K) at both ends pipe thread insert the hole of the fixture body cover, one end of wires must be upward; then lock them security with the spring washer and hex nut(J and M) until tight, however, arm(K) and arm(G) is evenly spaced distribution. Assembled using the same method the others arms.
3. **NOTE:** Follow wiring instructions carefully, see fig.3.
4. Slide the cover(I) and small ring(H) to the fixture body cover, lock them securely with the screw(that is "small ring" included this is a "screw").
4. Attach the cover(N) and cover(O) to the end pipe screw of the column(L), lock them securely with the finial(P). Attach the flower frame(B) and loop(A) to top center pipe screw of fixture body, by turning it clockwise until tight.
5. Attach the glass shade(F) and collar ring(E) to the lamp holder, attach the check ring(D) insert to the bottom hole of socket wrench(C), lock them securely with socket wrench, then remove the socket wrench and save it.
6. Install the light bulbs(Not included) in accordance with the fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**

### HANGING THE FIXTURE (Fig.1 Please see the Page.2)

**IMPORTANT: For a safe and secure installation, this fixture must be installed by means of support that is independent of the junction box.**

1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
2. Provide a 1/4" IPS pipe screw with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the junction box as shown. The junction box is not included.
3. Assemble the hex nuts, lock washer, hex coupling, pipe screw and ceiling loop(product shall prevail) to center 1/4"IPS support pipe and adjust overall length to allow the lock ring to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three (3) hex nuts, as shown.
4. Attach the chain to the fixture loop. Slip the lock ring and canopy over the upper end of the chain. Open the open link of the chain and lift the fixture to attach to the ceiling loop and close the open link. Lace the fixture wires, ground wire and safety cable through the chain and loop, exiting through the side of the hex coupling.
5. **IMPORTANT: you must, run the safety cable through the two clamp bolts, then through the top of the junction box and secure to structural member. NOW, fasten the end of safety cable through the two clamp bolts(see fig.1), lock them securely with the four small hex nuts until tight.**

### CONNECTING THE WIRES (Fig.3)

6. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.

7. Repeat same process with white junction box wire and ribbed wire leg of fixture wire. **NOTE:** Twist wires together in the same direction you twist the wire connector onto wires. If your junction box has grounding wire (green or bare copper), attach this wire and the bare copper wire from the fixture together as **step 1.**
8. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the lock ring to the bottom of canopy, screw it with until tight.

**Your installation is now complete. Return power to the junction box and test the fixture.**

FIG.2


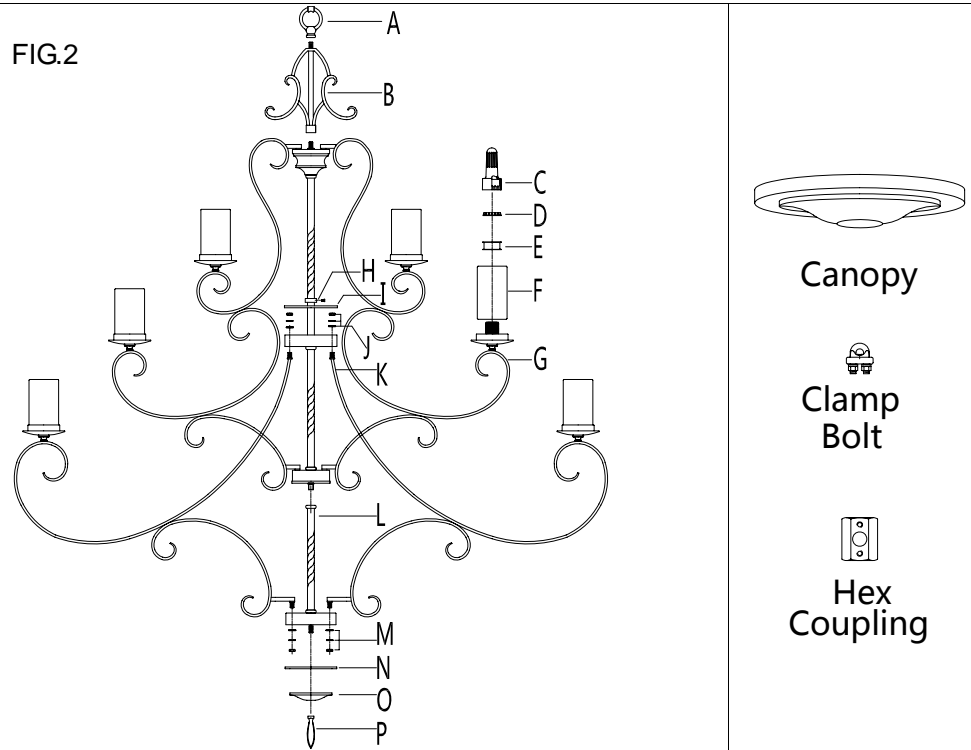


FIG.3

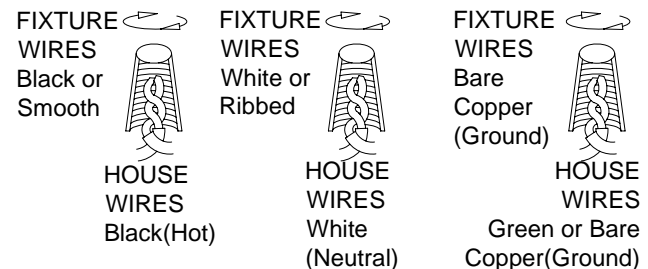

Thank you for purchasing a **LIVEX** product.  
 Need assistance with parts or assembly? Please call customer service at: **800-761-8056**  
 Or visit us on-line at: [WWW.LIVEXLIGHTING.COM](http://WWW.LIVEXLIGHTING.COM)

# ASSEMBLING & INSTALLATION INSTRUCTIONS FOR HEAVY MOUNTING FIXTURE

## Fig.1

