

SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:PND4002A

Care and Cleaning













To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	G	Short tube w/teeth		1X
B	Wire Nut		3X	H	Long tube		2X
C	Mounting Screw		2X	i	Lamp Boby		1X
D	Canopy		1X	J	Glass Shade		6X
E	Canopy Nut		2X	K	Socket Ring		1X 6X
F	Short tube		1X	L	Bulb		6X

Installation

Step 1


Unpack all parts from cartons carefully.

Separate the Mounting Plate(A) from the Canopy(D) by removing 2 Canopy Nuts(E) anti-clockwise.

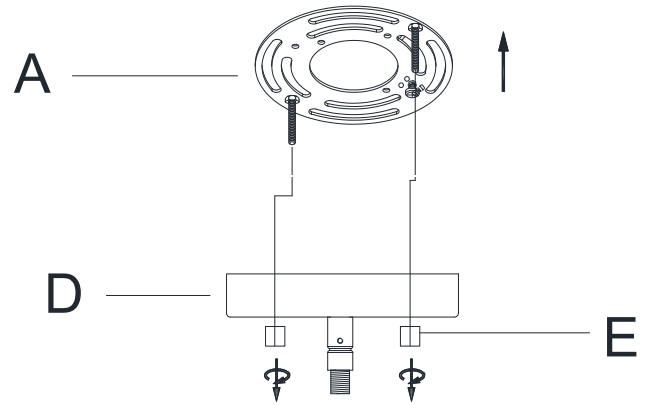

Step 2

Attach the Mounting Plate (A) to the ceiling junction box and secure it by tightening 2 Mounting Screws (C) with a screwdriver until secure.

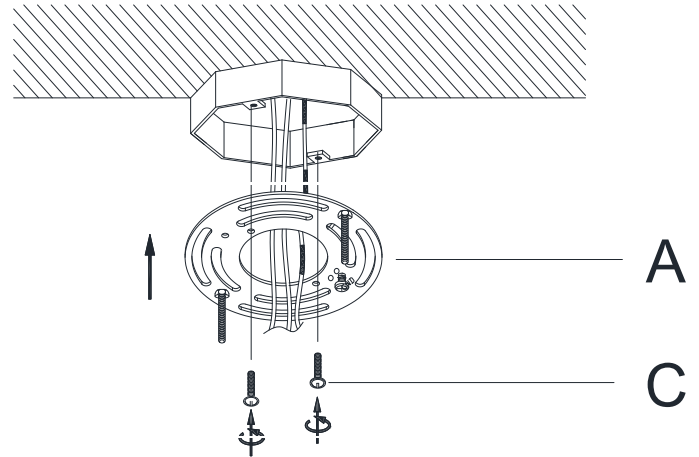

Step 3


Insert the power cord through the Short tube(F), Short tube w/teeth(G) ,2 Long tubes(H) as you want, make sure the thread portion of the tubes are downward. Rotate each part till tight.

Insert the power cord through the central hole of the Canopy(D). Rotate it till tight.




Step 4

Attach the Mounting Plate (A) to the ceiling junction box and secure it by tightening 2 Mounting Screws (C) with a screwdriver until secure.

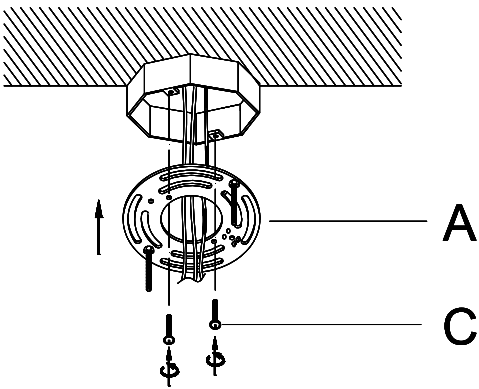

Step 5 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)




Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 6

Raise the Canopy (D) over the Mounting Plate (A), making sure 2 Threaded Rods extend downwards through 2 holes on the Canopy (D). Secure the Canopy (D) by turning the Canopy Nuts (E) clockwise until tight.

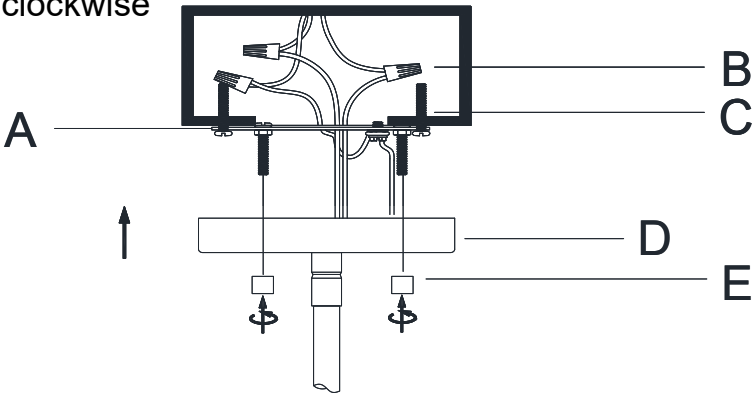


Step 7

Position the Glass Shade(J) over the socket, make sure the socket extend through the hollow of the Glass Shade(J). Fix the Glass Shade(J) by turning the socket ring(K) clockwise till tight.

Insert the bulbs(L) into the sockets until secure.

DO NOT EXCEED THE SPECIFIED WATTAGE.

**PLEASE USE TYPE "B" BULB MAX 40-WATT
OR CFL MAX 13-WATT OR LED MAX 9W
THERE ARE 6*4W LED BULBS IN THE BOX.**

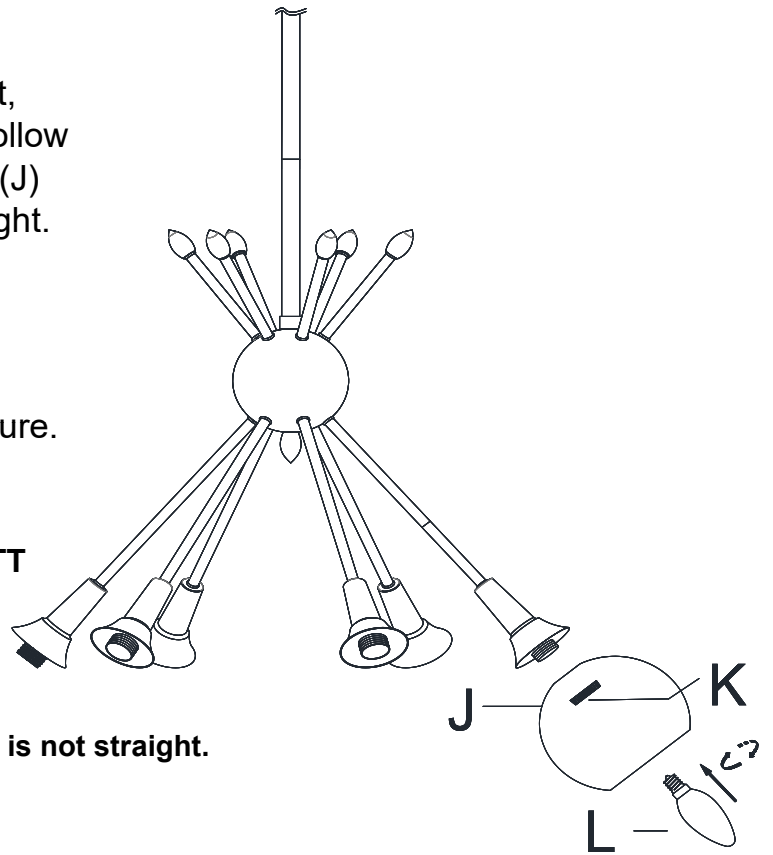

*****Adjust the Swivel if the assembled lamp body is not straight.**

Step 8

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP