



# ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.  
However, the installation instructions do apply to this product.

## 52108

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

### ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the pipe thread(H) to the center coupling of the lamp body(K), by turn it clockwise until tighten. Attach the tube(I)/cover(G) insert the pipe thread, lock them securely with the round nut(F). Slide the electrical wires through the tubes(E)/(D)/(C) and canopy.
4. Raise the tube(E) to top pipe thread of lamp body(K), raise the tube (D), tube (C) and loop(B) to the pipe thread in order , then by turning it clockwise until tight. Open the link(A), hooked the canopy and loop (B), close the link(A).
5. Install the light bulb(not included) in accordance with the fixture specifications.  
**NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!** This lamp bottom luminary is LED, the manufacturer has been installed.
6. By measuring, determine correct distance hole in mounting plate, then drilled two holes(by measuring distance hole) in the ceiling at junction box at two side. Raise the plastic anchor insert the hole. Thread the two mounting screws about 1/4" into the pre-drilled holes in the mounting plate, spaced about the same distance apart as the holes in the fixture canopy. Attach the mounting plate to the junction box with two junction box screws and two wood screws, tighten screws securely with screwdriver. The side of the mounting plate marked "GND" must face out. **The junction box is not included.**
7. While holding the canopy towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Single bar with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
8. Raise the canopy on to the Junction box, aligning screws on mounting plate with mounting hole in canopy and lock it securely with the ball nuts.
9. Attach the glass(J) insert to the lamp holder, rotate the glass until tighten.

**Your installation is now complete. Return power to the junction box and test the fixture.**

Fig.1


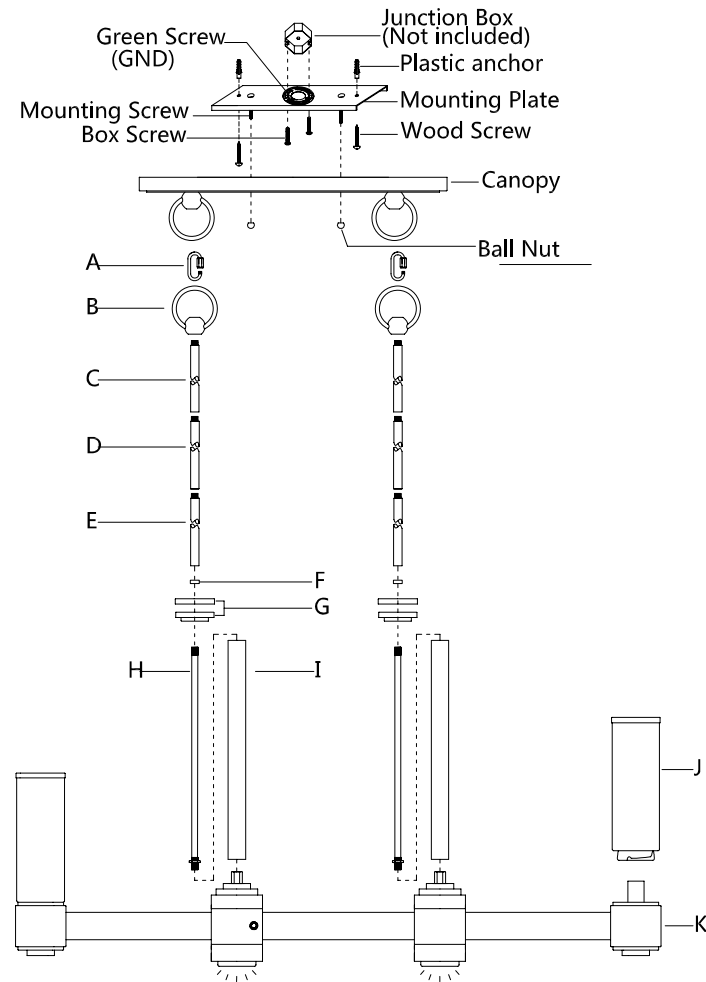


FIG.2

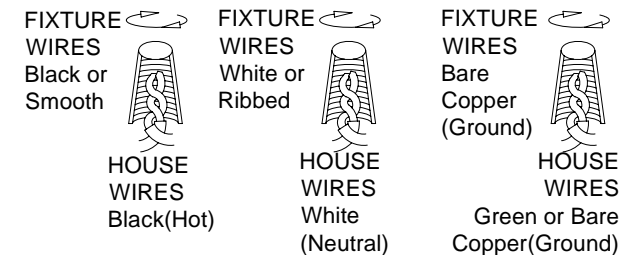

Thank you for purchasing a **LIVEX** product.  
Need assistance with parts or assembly? Please call customer service at: **800-761-8056**  
Or visit us online at: [WWW.LIVEXLIGHTING.COM](http://WWW.LIVEXLIGHTING.COM)