



| NO. | PART NAME |
|-----|-----------------------|
| 1 | Handle |
| 2 | Wearing ring |
| 3 | Handle flange |
| 4 | O-ring |
| 5 | Handle connecting bar |
| 6 | Screw |
| 7 | Cartridge nut |
| 8 | O-ring |
| 9 | Cartridge |
| 10 | Inlet pipe |
| 11 | Water valve |
| 12 | Clamp spring |
| 13 | O-ring |
| 14 | Gasket assembly |
| 15 | Lock nut |
| 16 | Screw |
| 17 | Body |
| 18 | Aerator |
| 19 | Water way |
| 20 | O-ring |
| 21 | Gasket assembly |
| 22 | Lock nut |
| 23 | Flexible hose |
| 24 | Flexible hose |



TWO HANDLE LAVATORY FAUCET

The product is CUPC, NSF-61, AB1953, WATERSENSE certified. Original certification model code: 18U32CW2 ASME A112.18.1/CSA B125.1


The tools might be applied to the following places:

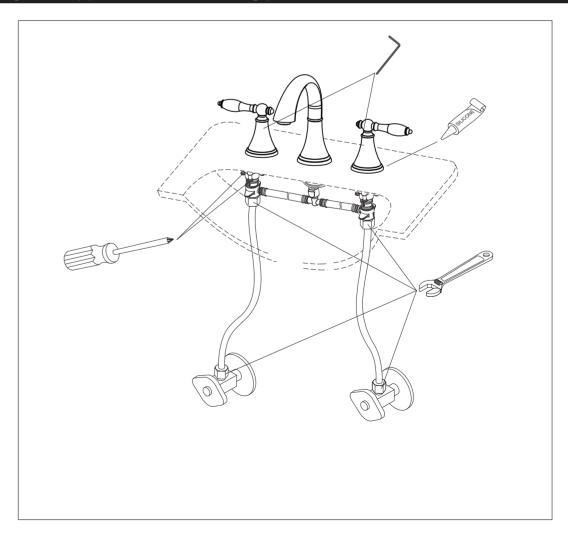




VINNOVA

106123-BAF-PC

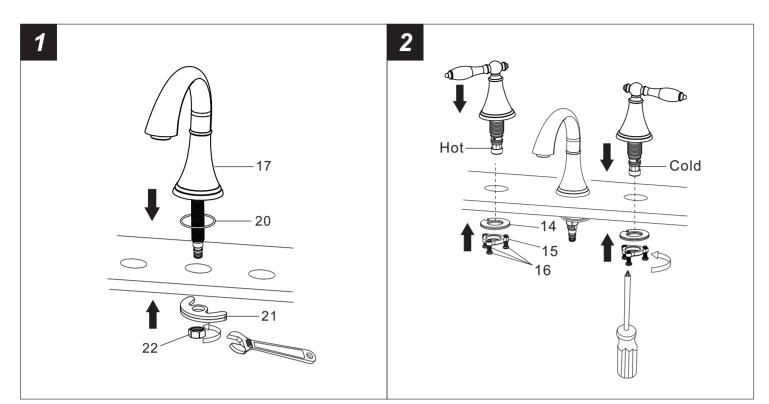


1.Position the o-ring #20 and body #17 in the installation surface as shown and secure it with gasket assembly #21 and tighten the lock nut #22 with adjustable wrench.

2.Position the handle in installation surface as shown and secure it with fixing kit (#14,#15,#16) and tighten the screw #16 with screwdriver. Repeat the above steps for the other handle. Caution: please be caution with the position of hot and cold handles.

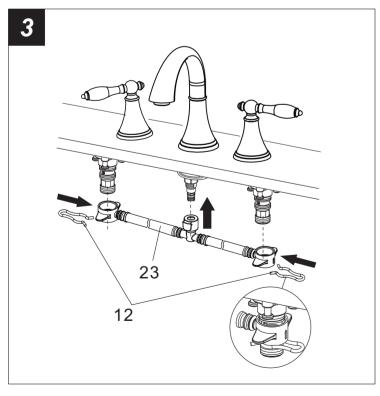

3.Position the flexible hose #23 as shown and fix it to the faucet as shown with clamp spring #12.

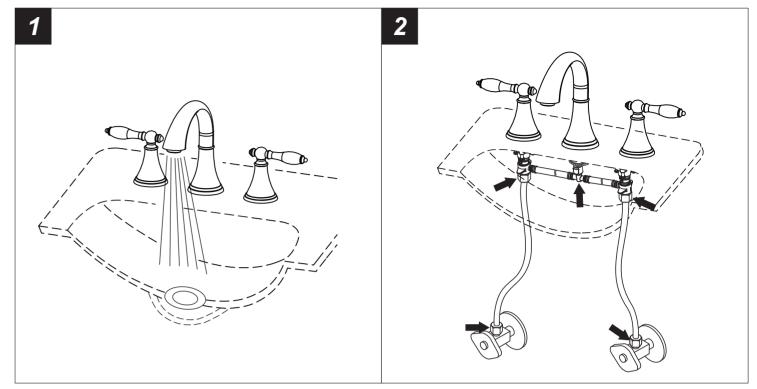

1. Remove the aerator by hand. Turn the faucet handle all the way on, turn on hot and cold water supply and flush water lines for one minute. Reinstall aerator by hand. 2. Check all connections at arrows for leaks, re-tighten it if necessary. BUT DON'T OVERTIGHTEN

BUT DON'T OVERTIGHTEN

Cleaning and care Step 3

Daily cleaning and care are required in order to keep the product shining and properly working.

1 Clean it with water and dry it with soft cloth.

2 Clean the product with gentle liquid or glass cleaner.

3 Don't use acid cleaner.

4 Don't clean with abrasive material, abrasive paper or knife.