


DESCRIPTION	PICTURE	CODE	QTY
Canopy+Mounting Plate	•	15 / 19 / 23	1 SET
Mounting Box Screw		21	2 PCS
P3 Wiring Cap		22	3 PCS
Gecko and wood screw		18 / 20	2 SET
Fix the lamp body frame screws		3/5	24 PCS
Grounded bare copper wire		17	1 PCS
Down Rod 12"		10 / 11 /12	6 PCS
Down Rod 3.35"+Hooke's joint +Reinforce gasket + Nut		13 / 14 / 16	2 SET
Lamp holder casing		25	6 PCS
Flying saucer		24	6 PCS
Lamp body center tube+Nut		7/9	2 SET
Lamp Cover	<u></u>	8	2 PCS
Lamp Body		6	1 PCS
Lamp body frame (Lower part)		4	1 PCS
Lamp body frame (support tube)	4	2	6 PCS
Lamp body frame (upper)		1	1 PCS


WARNING - if any Special Control Devices are used with this Fixture, Follow the instructions Carefully to assure fun compliance With N.E.C. requirements. if there are any questions, contact a Qualified Electrical Contractor. CAUTION - All glass is fragile, use care when handling Glass component(s) and or Lamp(s). WARNING - This product contains chemicals known to the State of California to cause cancer, birth defects and /or other reproductive harm. Thoroughly wash hands after installing. handling. cleaning, or otherwise touching this product

## CANOPY MOUNTING & WIRE CONNECTION ASSEMBLY STEPS:

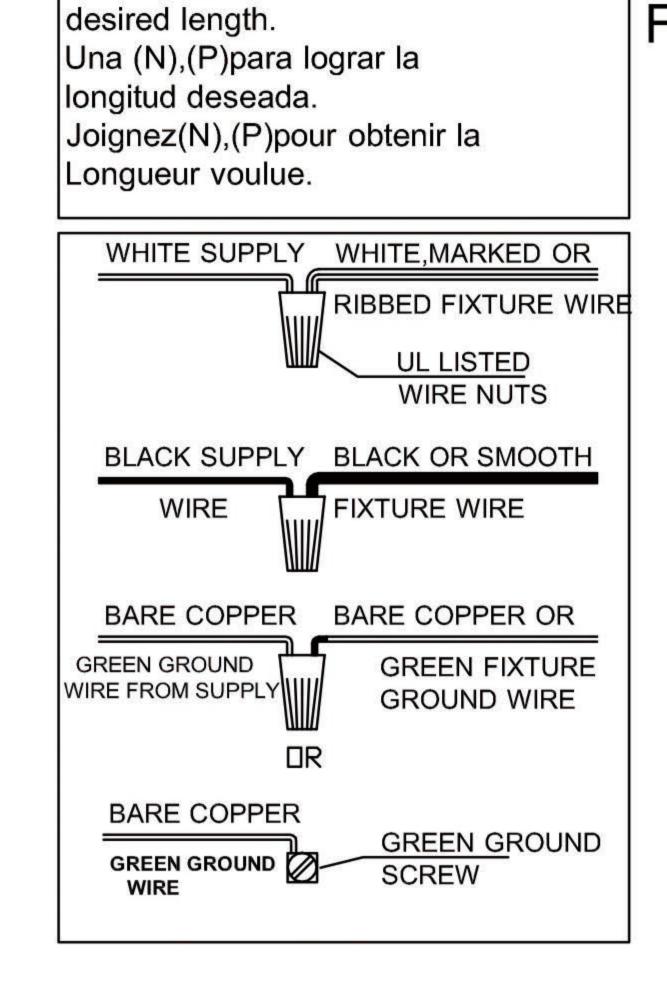

Attach(N),(P) to achieve overall

## FIXTURE ASSEMBLY STEPS:

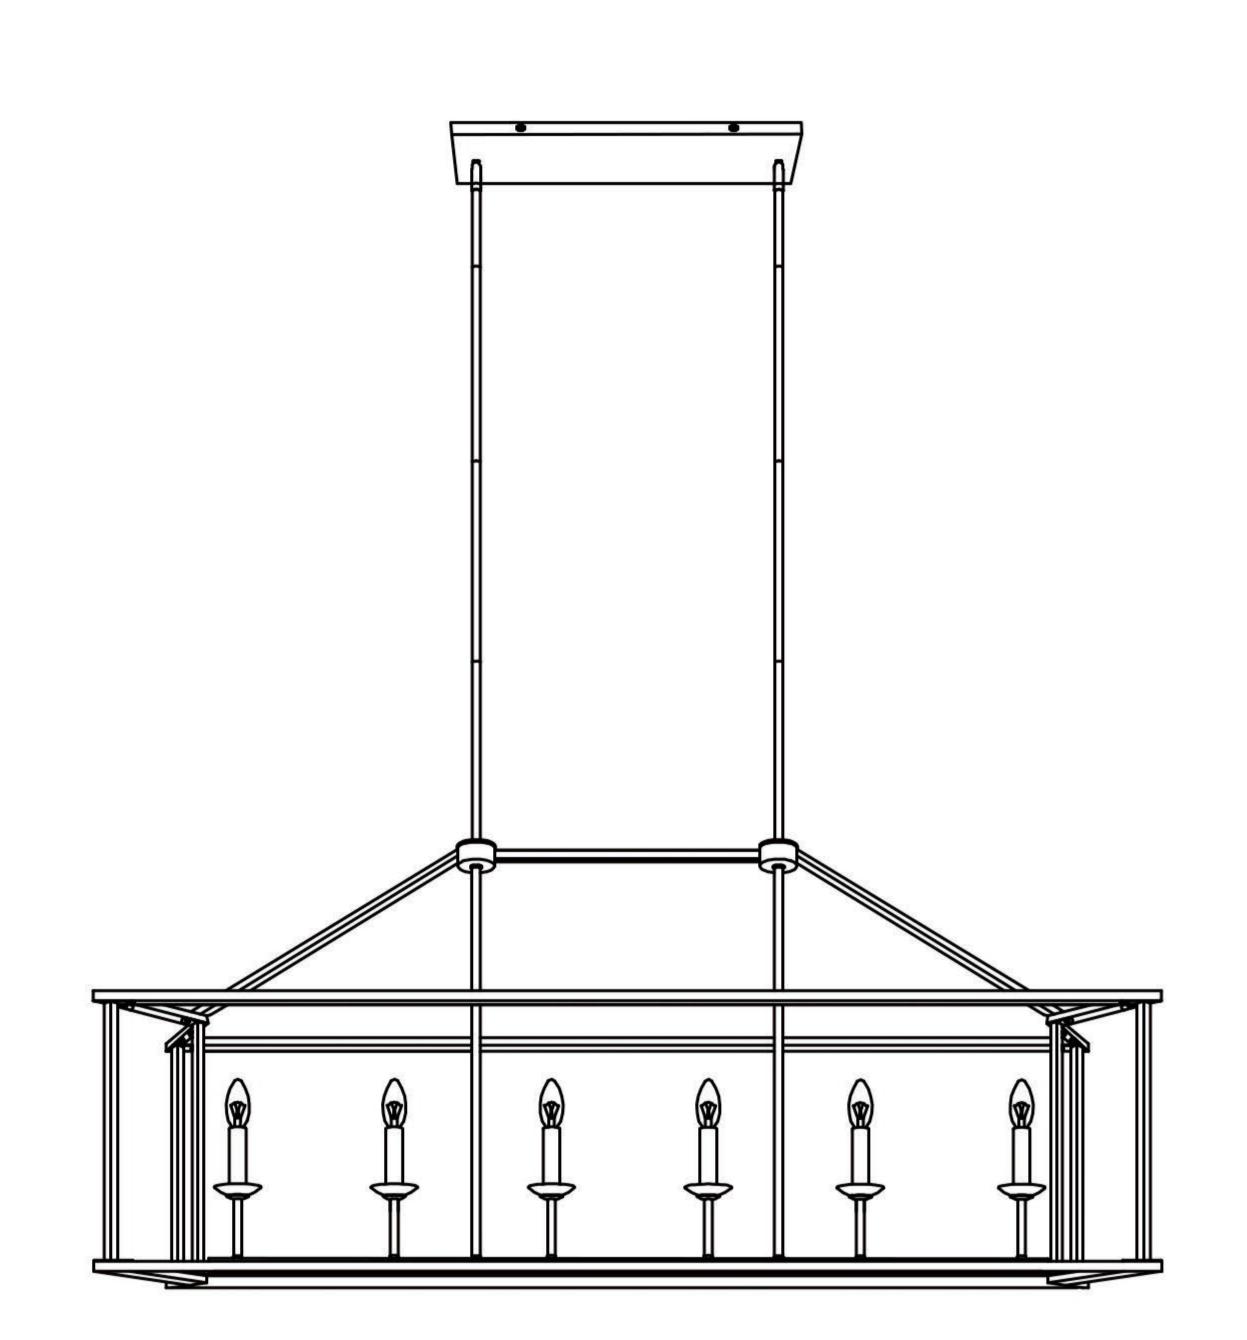

ITEM NO.: 15056

110-120V / 60Hz E12 6\*MAX 60W TYPE B (Do not contain light bulb)

- 1. AC110~120V,50~60Hz.The Max lamps power is 60W TYPE B Bulb.
- 2. Avoid to scratch the surface of lighting and the wires when install it.
- 3. Connect the live wire with the white wire, the netural wire with the parti-colored one, the earth one with the earth symbol (L-L,N-N).
- 4. Don't install it to the ceiling before it's completely dry, thesurrounding around must be ventilated and dry.
- 5. Keep away from the acid, basicity objects and gases, clean withsoft cloth, water washing is not allowed.
- 6. Be careful when you install glass lamp shade
- 7. The lighting must be installed by professional electrician and used indoor only.
- 8. Please keep attention to cut off the power supply when installing, cleaning, and replacing bulb.