


TV STAND

Style # TV-01-A

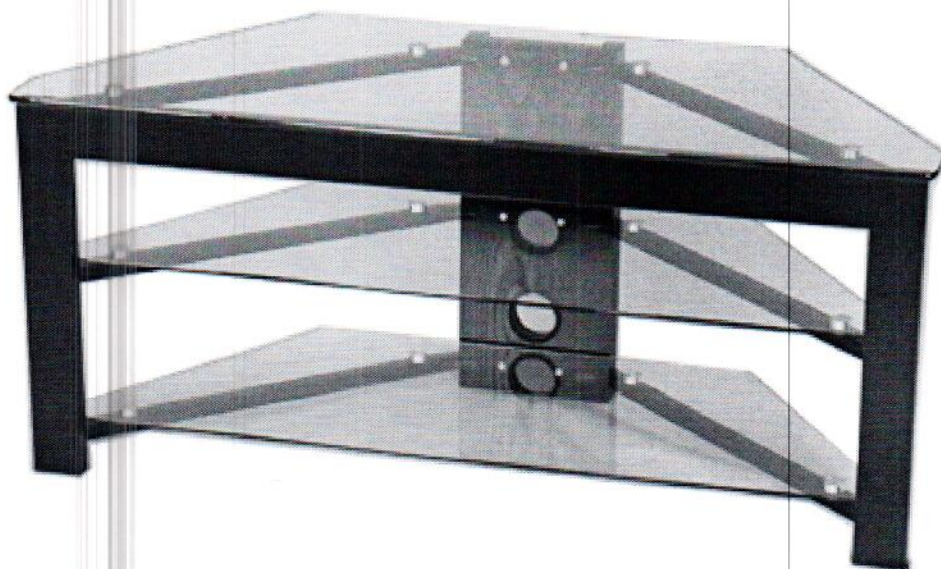

DO NOT RETURN TO STORE.

- * Broken or Missing Parts?
- * Need help with assembly?

If you have any questions just call 1-800-468-6447.

Warning! This TV stand is designed to accommodate most 50" Flat / Plasma TV sets.
Maximum weight capacity is 80 lbs.

Hardware Identification

For ease of identification all hardware is organized into separate Hardware Packs for each Step in the Instruction Manual.

Hardware Pack

(A) Top Glass * 1

(B) Shelf Glass * 2

(C) Main Support * 1

(D) Support Braces * 3

(E) Cable Management Brace * 1

(F) Small Bolts * 12

(G) Medium Bolts * 12


(H) Large Bolts * 6

(I) Allen Key * 1


(J) Feet * 4

(K) Cable Tie * 1

(L) Eyelet Screws * 2

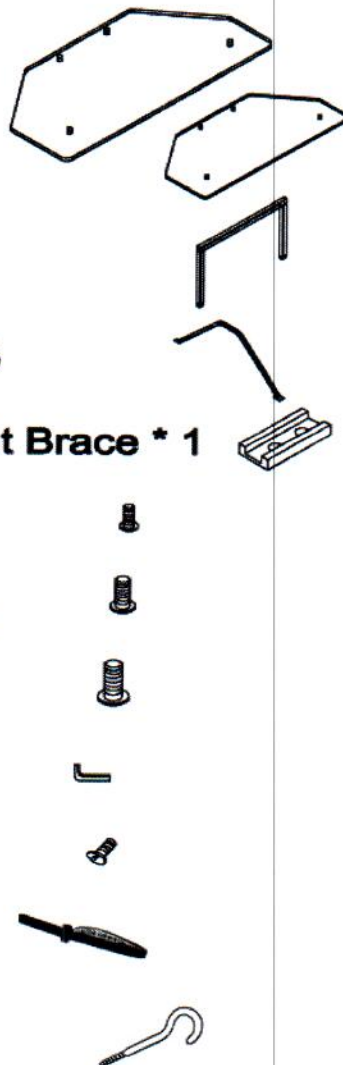


STEP 1

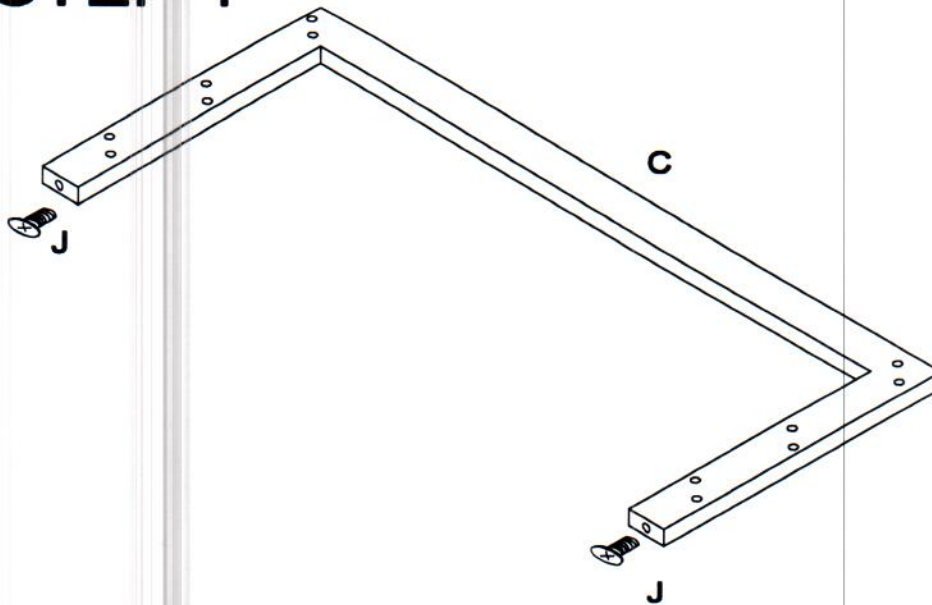


- 1) Place main support (C) on carpet or soft material to avoid scratches.
- 2) Insert feet (J) as shown.

STEP 2

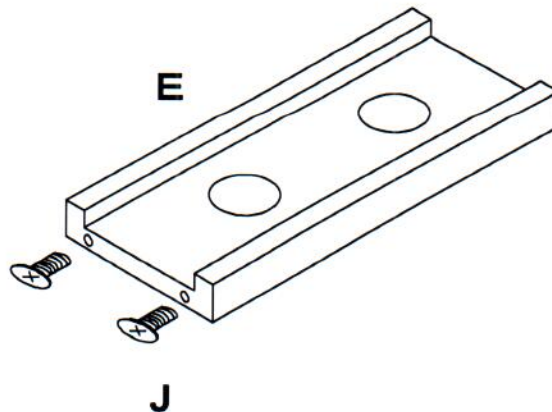


- 1) Insert feet (J) as shown.

STEP 3

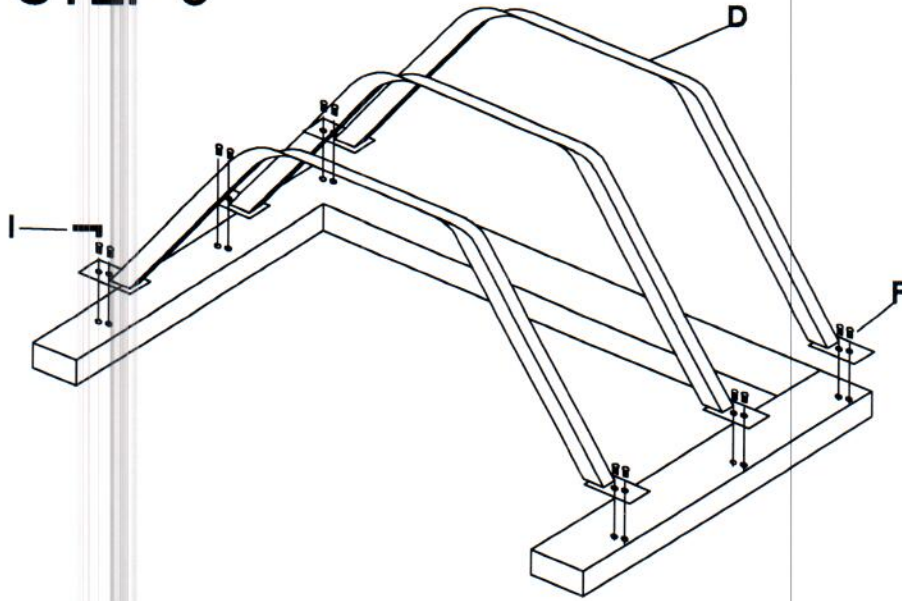


1) Using small bolts (F), attach support braces (D) as shown.

STEP 4

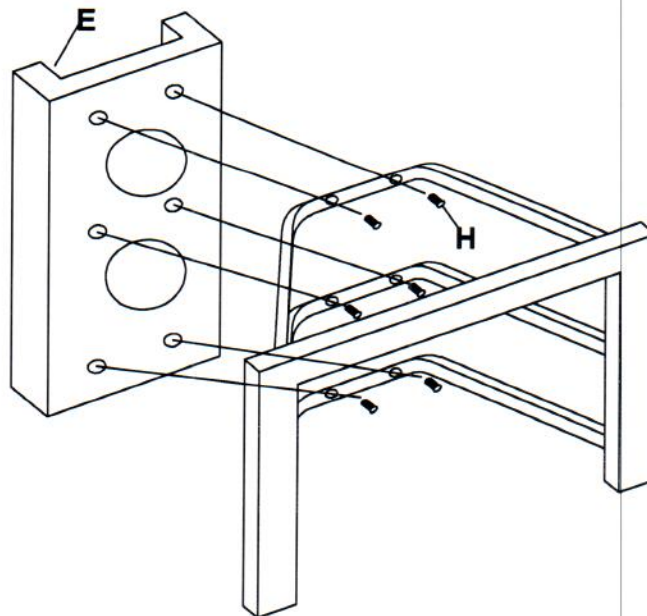

1) Attach cable management brace (E) to back of unit with large bolts (H).

STEP 5

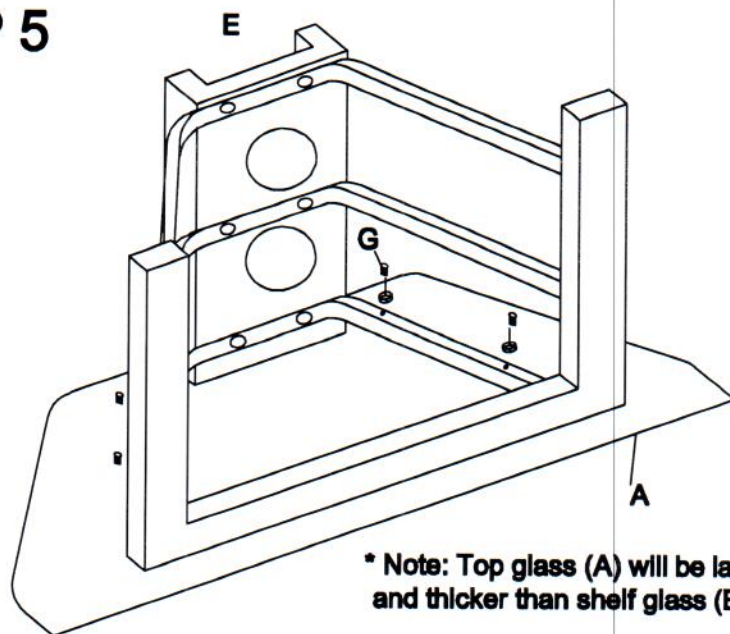


* Note: Top glass (A) will be larger and thicker than shelf glass (B).

- 1) Place top glass (A) upside down so threaded discs face up.
- 2) Gently place frame on top of glass and attach with medium bolts (G).


STEP 6

*CAUTION: Never let go of glass shelf until it is securely bolted.

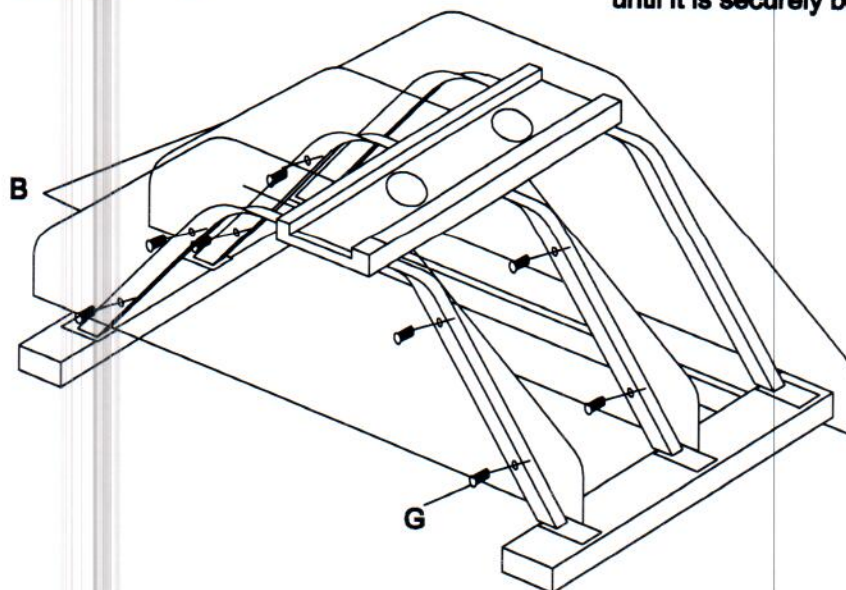


- 1) Carefully place unit front side down.
- 2) Slowly slide glass shelf (B) into middle position, and attach with medium bolts (G) using one hand to hold glass.
- 3) Repeat STEP 2 for bottom shelf.

STEP 7

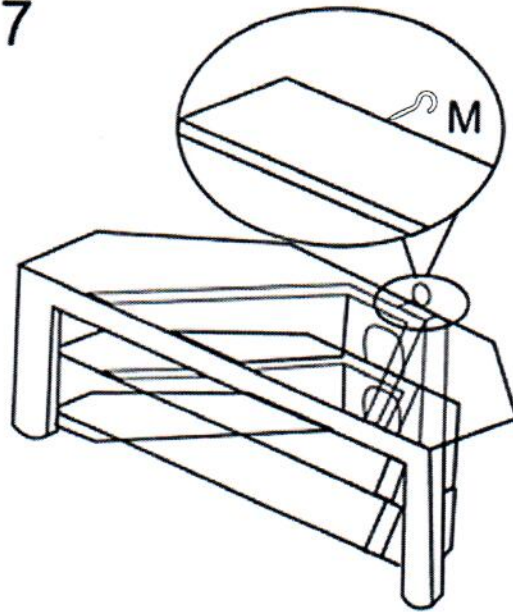

- 1) Attach eyelet screw (M) to small hole on back of cable management brace (E).

STEP 8

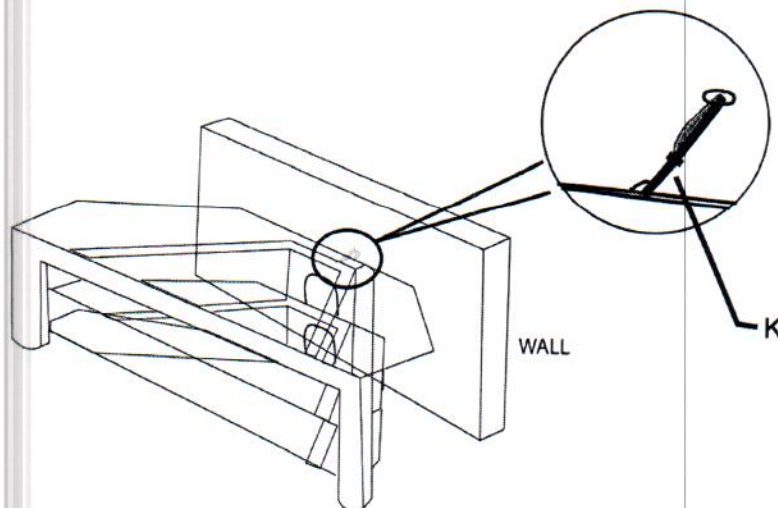

- 1) Attach second eyelet screw (M) securely into a wall stud or solid baseboard where unit is to be placed.
- 2) Connect eyelets together using cable tie.