

JONATHAN ADLER

Lisbon Sconce (UL VERSION) Assembly Instruction


NET WEIGHT OF THIS FIXTURE: 11 LBS

Safety Instruction:

- We strongly recommend that a professional electrician install all direct wire fixtures.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.
- Do not touch bulb when fixture is turned on. Do not look directly at light bulb. Keep flammable materials away from light bulb.
- This fixture takes (6) 60-watt max. Type G bulb (not included).

DIRECT WIRE ASSEMBLY INSTRUCTIONS:

1. Screw finial (A) on the top of lamp.
2. Center the sconce on the junction box location on the wall.
3. Remove mounting plate (L) from back plate by removing screws (D) and hold mounting plate (L) in a level position against the junction box.
4. Affix mounting plate (L) to the junction box by threading mounting screws (D) through holes in mounting plate (L).
5. Cut the cord to the desired length for making electrical connection. At least six inches of wire will be needed to make proper electrical connection.
6. Carefully unscrew nipple (J) from back plate. Thread plug into hole vacated by the electrical cord and nipple (J).
7. Carefully pull the wiring from wall junction box. Thread the wires through the center hole in mounting plate (L).
8. Connect ground (green or silver in color) wire from fixture to ground wire in the outlet box. Fasten wires together with wire nut and tightly wrap the connection with electrical tape.

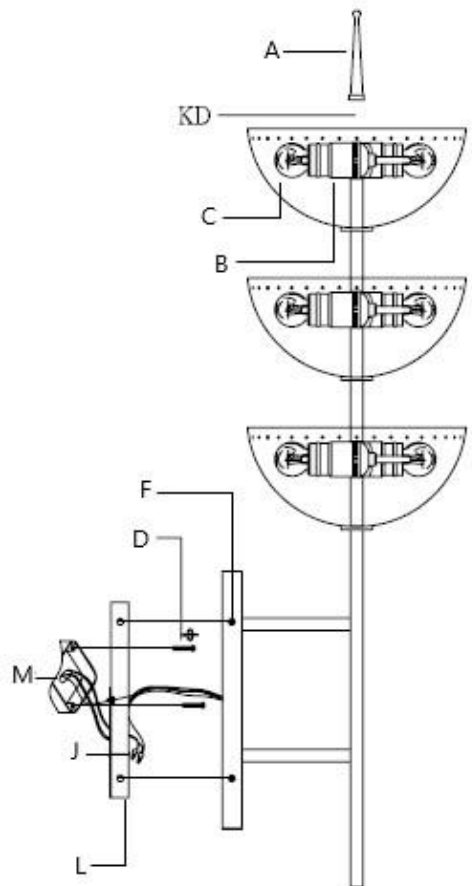

9. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut and tightly wrap connection with electrical tape.
10. Slide back plate over mounting plate (L). Thread screws (F) into vacant holes at the sides of back plate to secure fixture to the wall.
11. Insert Six (6) bulbs (C) into the socket (B).
12. Assembly is completed.