# Assembly and Installation Instructions

## 9168-4H

#### NOTE:


Before installing, consult local electrical codes for wiring and grounding requirements. We advise calling a qualified electrician when making the wire connections to the junction box. Save these instructions for future reference.

#### **WARNING:**

- 1. Shut off the power to the area where you will be working
- 2. Use 60-Watt maximum type B bulb
- 3. Do not use polish or cleaner on your fixture, just wipe with soft cloth

Unpack - Carefully unpack your new fixture and lay our all parts on a clean surface.

- 1. Install the threaded nipple (F) onto the bottom of the lamp body, cover with the decorative finial (G), and secure tightly with the bead cap (H).
- 2. Install the threaded nipple (E) onto the top of the lamp body, cover with the decorative finial (D), and secure tightly with the lifting ring (C).
- 3. Hang the crystals (J&K) according to diagram at right.
- 4. Attach the threaded nipple (A) onto the cross bar and lock it into place with hex nut (A).
- 5. Attach the cross bar to the outlet box using two outlet box screws upwards.
- 6. Determine the length of chain needed and using pliers (not included) remove any extra chain.
- 7. Weave fixture wires and ground wire through every other chain link, the top nut, canopy, top loop, and nipple (A). Secure the top loop to the nipple (A) and hang the chain to the top loop and the fixture loop.
- 8. Make the below wire connections.
  - a. Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
  - b. Attach ribbed wire from light to white wire from power source with a wire nut.
  - c. Attach smooth wire from light to black wire from power source with a wire nut.
- 9. Tuck the wire connections neatly into the outlet box.
- 10. Attach the canopy to the ceiling and secure with top nut.
- 11. Install the sleeves (L) onto the lamp body.
- 12. Install the bulbs (not included). The maximum wattage is 60W.
- 13. Turn the power on at the fuse or circuit box.

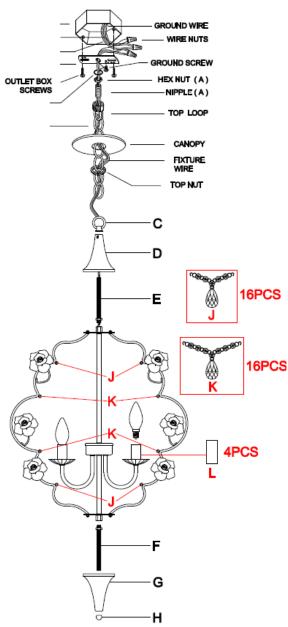

### 1-Year Limited Warranty

#### "Limited" Warranty Program

For a period of one (1) year after purchase, AF Lighting ("Manufacturer") will either repair or replace defective components in accordance with this Limited Warranty.

#### Sales and use taxes, plus shipping and handling charges are the responsibility of the consumer.

This warranty is between Manufacturer and the original purchaser and is valid only when accompanied by the original purchaser's sales receipt showing original date of purchase and location of purchase. Replacements under this warranty revert back to the date of original purchase for future warranty.

Manufacturer or its authorized dealer can accept or reject warranty claims based on its findings. This warranty applies in normal residential use only, where an issue with the product is due to a defect in material or workmanship. Manufacturer can make substitutions as required of materials, components, and sub-components of comparable value and utility. This warranty is limited to product repair or replacement (to be determined solely by Manufacturer). Warranty return is limited to only the single affected component.

This warranty covers only manufacturing defects and does not cover normal wear and tear, abuse or misuse, including: water damage, chemical damage, exposure to extreme heat or cold or abrasion. This warranty is invalid if the product is not used for intended purpose. Manufacturer disclaims liability for any aspect of installation and any inconvenience caused by a defective part of a component.

Certain items are not covered by this warranty. These include, but are not limited to the following:

- 1. Components subjected to abuse, including abuse intended to simulate failure.
- 2. Damages caused by retailer, shipper or installation crew (such as scratches, dents, tears, breaks, etc.).
- 3. Any part which merely exhibits normal wear yet functions essentially as new.

To make a claim, send a copy of the original sales receipt along with a brief description of the problem to the address below. Please include your email address and daytime telephone or cell phone #. All items will be charged actual freight costs plus \$15 for handling. Repairs or replacement will be made at the Manufacturer's option.

THIS IS THE ENTIRE EXCLUSIVE EXPRESS LIMITED LIABILITY. THE MANUFACTURER NEITHER MAKES NOR IS RESPONSIBLE FOR ANY OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING THOSE OF RETAILING DEALERS. THIS EXCLUSIVE REMEDY IS LIMITED TO RECEIPT OF A CREDIT IN CONNECTION WITH THE REPAIR OR REPLACEMENT OF ANY PRODUCT OR COMPONENT DEEMED TO BE DEFECTIVE UNDER THE TERMS AND CONDITIONS AS STATED IN THIS WARRANTY. NEITHER AF LIGHTING, THE PRODUCT MANUFACTURER NOR ITS AGENTS SHALL BE LIABLE IN ANY CASE FOR INCIDENTAL, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT OR ARISING OUT OF ANY BREACH OF THIS WARRANTY OR NEGLIGENCE EVEN IF IT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. EXCEPT AS OTHERWISE MAY BE REQUIRED BY LAW, THERE ARE NO OTHER EXPRESS OR IMPLIED WARRANTIES OTHER THAN THE WARRANTY DESCRIBED HEREIN, AND ALL OTHER WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY DISCLAIMED.

**Contact Warranty Services at:** 

1-800-881-5483 or AFsupport@aflighting.com