

Largo Pendant

TP1161 | 1.0

GENERATION LIGHTING PENDANT

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

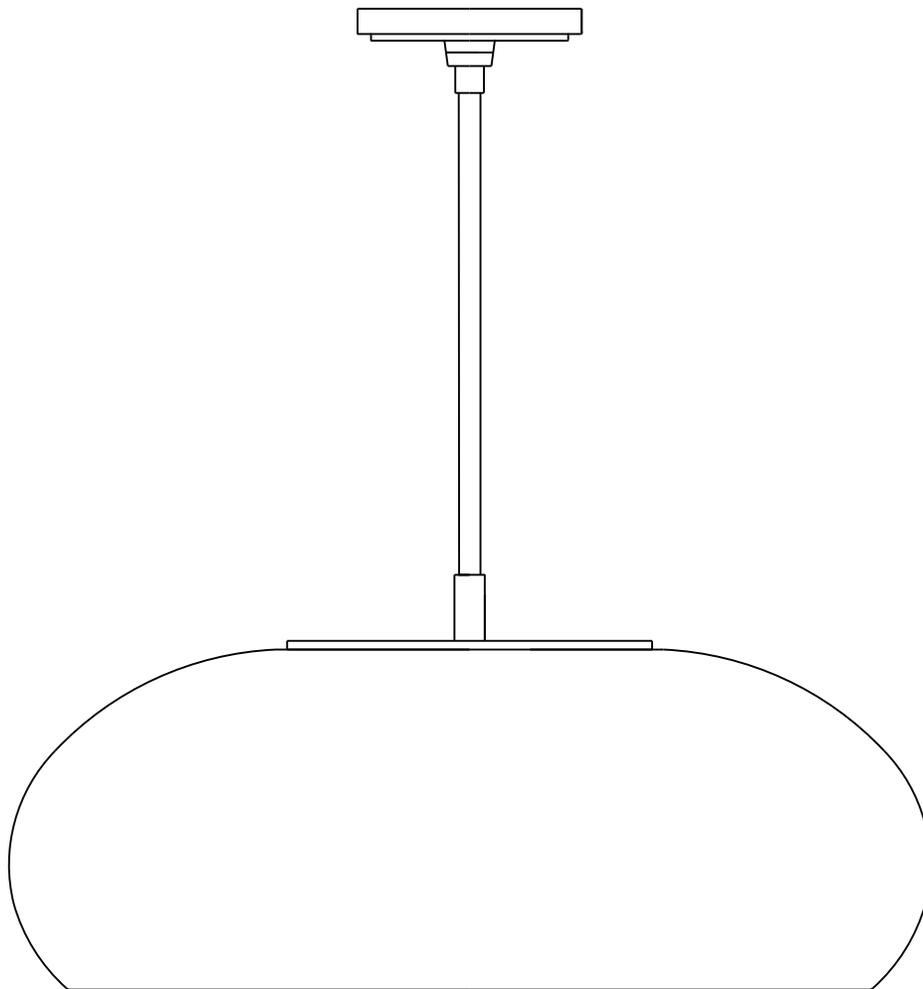

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

1A

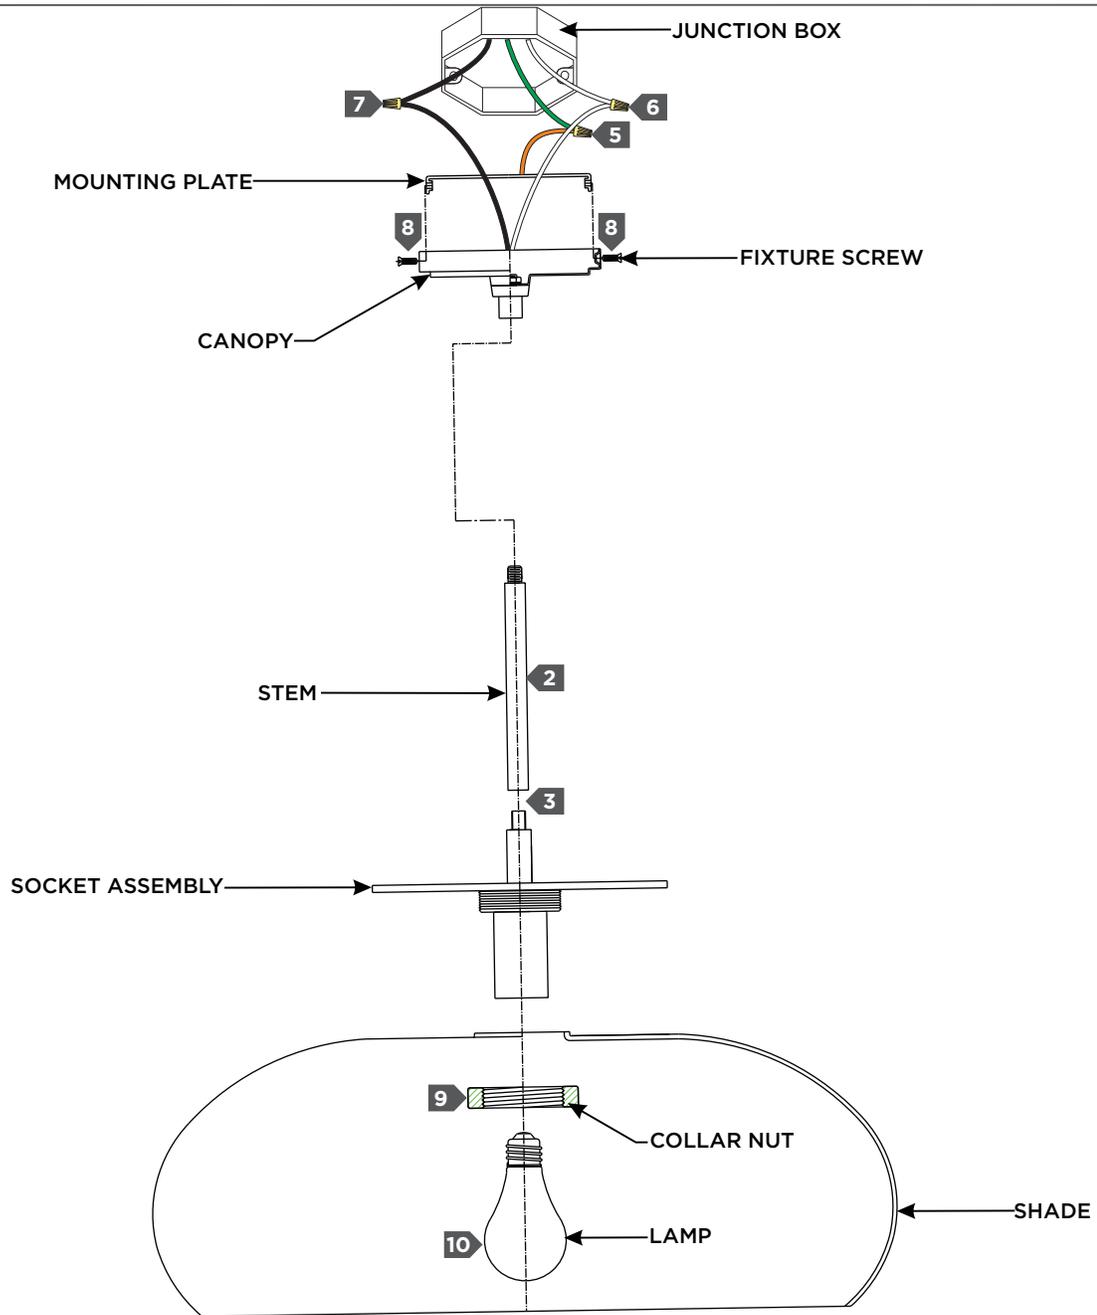

- 1 Secure the mounting plate to the junction box.
- 2 Determine the wanted height or look of the fixture with the decorative stems, then assemble them by screwing them together.
- 3 Feed the fixture wires through the stem assembly, then screw the stem assembly on to the top of the socket assembly.
- 4 Weave the cord through the canopy and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 5 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 6 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 7 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 8 Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the fixture screws.
- 9 Place the shade over the socket and secure it in place by screwing the collar nut onto the socket.
- 10 Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.