


Model: LED160

LEDme® Track Luminaire

WAC LIGHTING

Responsible Lighting®

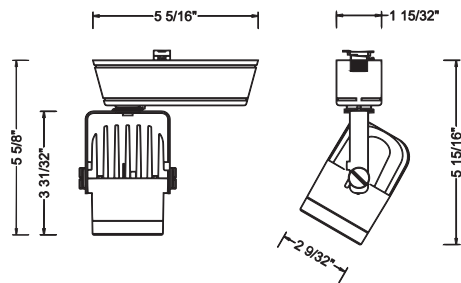

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

LED160 track spot offers superior light output in a small, unobtrusive design. The high output LEDs outperform a 20W metal halide fixture at the size of a typical MR16 luminaire. Developed for upscale residential and commercial environments.

FEATURES

- Free of projected heat and UV and IR radiation
- Alternate beam angles may be ordered separately
- Replaceable LED modules
- Accommodates 1 lens or honeycomb
- 360° horizontal and -90°~+90° vertical aiming
- Lockable vertical aiming for precise adjustments
- 60,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum with removable lens cap for easy change of lenses or accessories

Finish: Black (BK) and White (WT) powder coat paint.

Driver: Input voltage: 120V AC 50/60Hz.

Light Source: High-Output LED.

Dimming: Dimmable to 10% with electronic low voltage (ELV) dimmer and triac dimmer.

Standards: ETL & cETL Listed.

FIXTURE PERFORMANCE

Model #	Beam	Voltage	Color Temp	Power	Lumens	Efficacy	CRI
LED160S-27	20°	120V	2700K	15W	935	62.3 Lm/W	85
LED160F-27	40°				930	62 Lm/W	
LED160S-927	20°	120V	2700K	15W	775	53 Lm/W	90
LED160F-927	40°				760	50.5 Lm/W	
LED160S-30	20°	120V	3000K	15W	955	63.5 Lm/W	85
LED160F-30	40°				945	63 Lm/W	
LED160S-930	20°	120V	3000K	15W	765	51 Lm/W	90
LED160F-930	40°				750	50 Lm/W	
LED160S-35	20°	120V	3500K	15W	960	64 Lm/W	85
LED160F-35	40°				950	63.5 Lm/W	
LED160S-40	20°	120V	4000K	15W	975	65 Lm/W	85
LED160F-40	40°				970	64.5 Lm/W	


ORDER NUMBER

Track System	Model	Watt	Beam	Color Temp	CRI	Finish
H H Track	LED160	15W	S 20°	27 2700K	85	BK Black
L L Track			F 40°	927 2700K	90	
J J/J2 Track				30 3000K	85	
				930 3000K	90	
				35 3500K	85	
				40 4000K	85	
						WT White



Example: J-LED160S-27-WT

FINISHES



REPLACEMENT MODULE

BXRC-27E1000-B-03	2700K	85 CRI
BXRC-27G1000-B-03	2700K	90 CRI
BXRC-30E1000-B-03	3000K	85 CRI
BXRC-30G1000-B-03	3000K	90 CRI
BXRC-35E1000-B-03	3500K	85 CRI
BXRC-10E1000-B-03	4000K	85 CRI

INTERCHANGABLE OPTICS

RF-S	20°
RF-F	40°

LENSES & ACCESSORIES

Model	Color	Model	Finish
LENS-16 Color Lens	AMB Amber	FR Frosted Lens	
	BLU Blue	SPR Spread Lens	
	GRN Green	BEL Beam Elongating Lens	
	RED Red	HCL Honey Comb Louver	
	YEL Yellow		

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585