## **SVANGE 10242DLLRRR LED Medicine Cabinet - Specification Sheet**



#### **Features**

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 9000 Lumens
- \_ CRI 90+
- Integrated Defogger

### Construction

- Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- · (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

## **Codes/Standards Applicable**

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

### **Electrical System**

- 120Vac, 60Hz, 55W
- Electric Current: 0.45A
- Wattage: 55W

### Model

- SVANGE 10242DLLRRR Swinging Doors
- Included models in this configuration: Cabinet 1=1842L Cabinet 2=2442L Cabinet 3=1842R Cabinet 4=2442R Cabinet 5=1842R




## **Electrical System**


- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A



### **CABINET CONFIGURATION**


Included models in this configuration:
Cabinet 1=1842L Cabinet 2=2442L Cabinet 3=1842R
Cabinet 4=2442R Cabinet 5=1842R

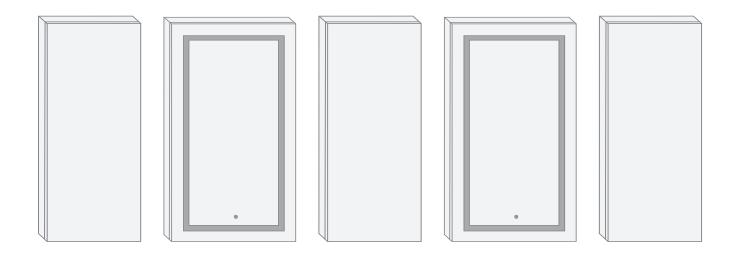

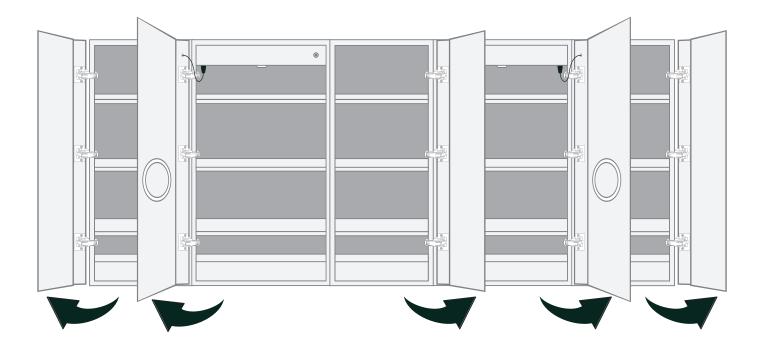





# **SVANGE 10242DLLRRR LED Medicine Cabinet - Specification Sheet**

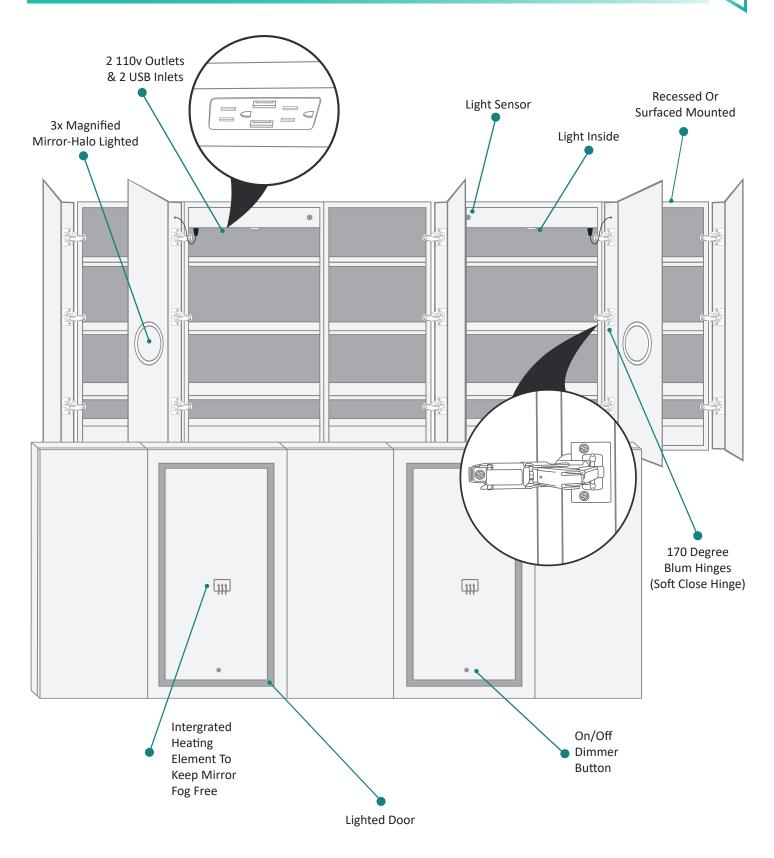



### **SURFACE MOUNT**

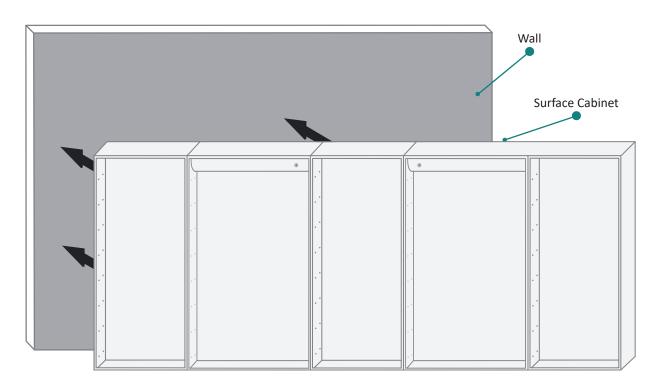

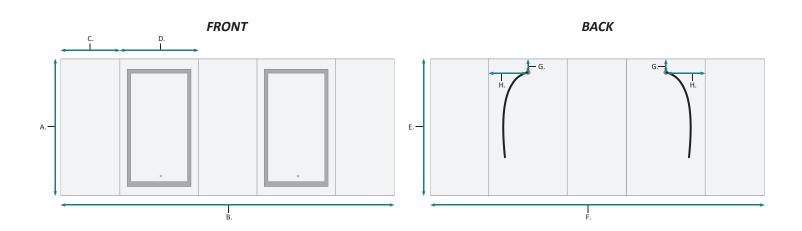



### FRONT & BACKS

MODEL	А	В	С	D	E	F	G	н
SVANGE10242 DLLRRR	42	102	18	24	40-1/2	94-1/2	1-1/8	11-1/4



### **RECESSED MOUNT**

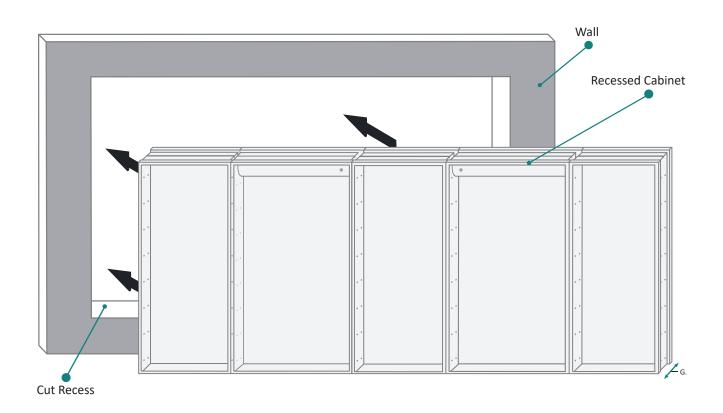

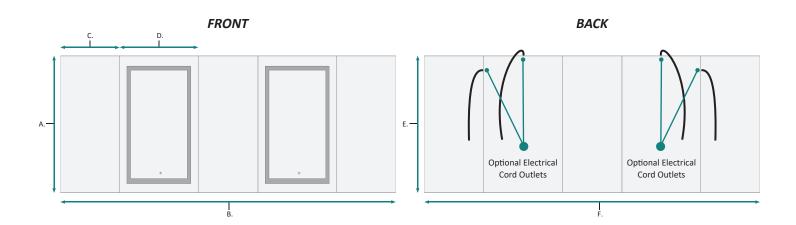


### FRONT & BACKS

MODEL	А	В	С	D	E	F	G
SVANGE10242 DLLRRR	42	102	18	24	40-1/2	94-1/2	3-7/8



### RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

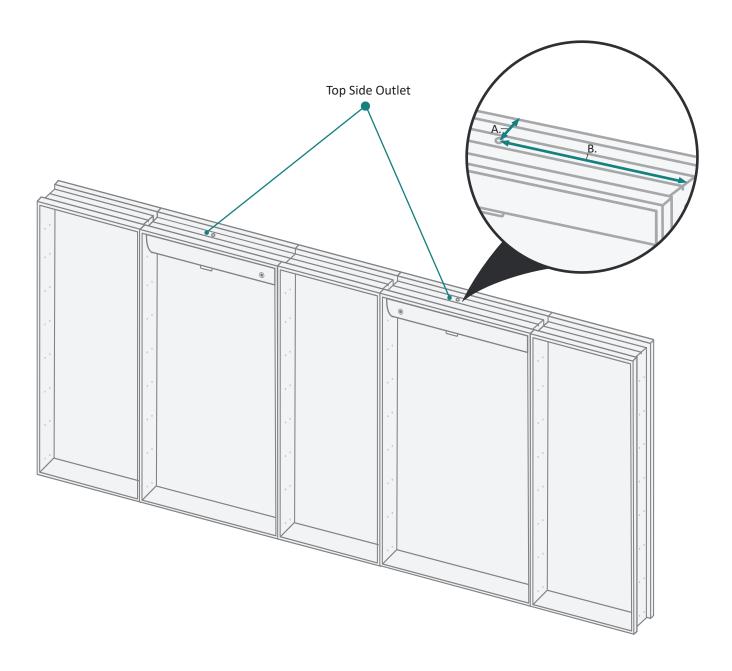


#### **ELECTRICAL CORD LOCATIONS**

MODEL	Α	В
SVANGE10242 DLLRRR	1-3/8	11-1/4






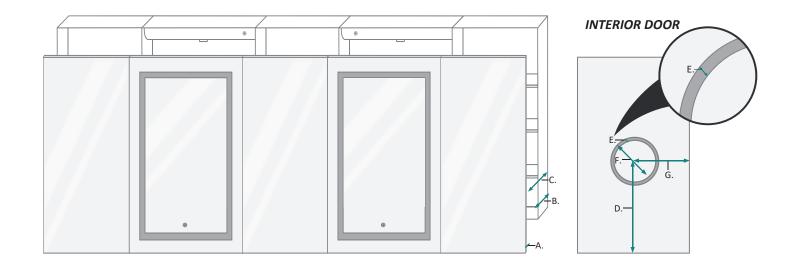

#### **DOOR & CABINET**

MODEL	А	В	С	D	E	F	G
SVANGE10242 DLLRRR	7/8	3-7/8	4-3/4	18	3/8	5-1/4	11-1/4

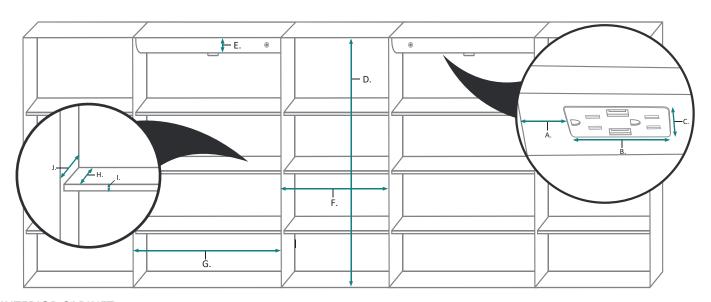

### **INTERIOR CABINET**

MODEL	А	В	С	D	Е	F	G	Н	1	J
SVANGE10242 DLLRRR	3-3/4	5-5/8	1-1/4	40-1/2	2-1/4	16-1/2	22-1/2	2-3/8	3/8	3-5/8