## ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 50702 For Wall Mount Fixture

## WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

## MOUNTING THE FIXTURE Installation (see fig.1)

## Wiring (see fig.2)

- 1. Disconnect power at main electrical panel before installation.
- 2. Carefully unpack new fixture and lay all the parts on a clear surface.
- **3.** Thread the two mounting screws about 1/4" into the pre-drilled holes in the mounting plate, spaced about the same distance apart as the holes in the fixture back plate. Attach the mounting plate to the junction box using two junction box screws. The side of the mounting plate marked "GND" must face to out. **This junction box is not include.**
- 4. Guide fixture wires through hole in center of mounting plate.
- 5. Follow wiring instructions carefully (see fig.2)
- 6. Attach fixture body(F) to the junction box, aligning mounting holes of the fixture back plate with mounting screws ,lock it securely with the ball nut(G).
- Put the crystal plate(D) onto the lamp holder. Attach small cover(C) to the top of candle sleeve. Attach the cloth shade (A) onto the candle sleeve, lock it securely with the check ring(B).
- 8. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

- Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
- 2. Tuck the wire connections neatly into the wall junction box.

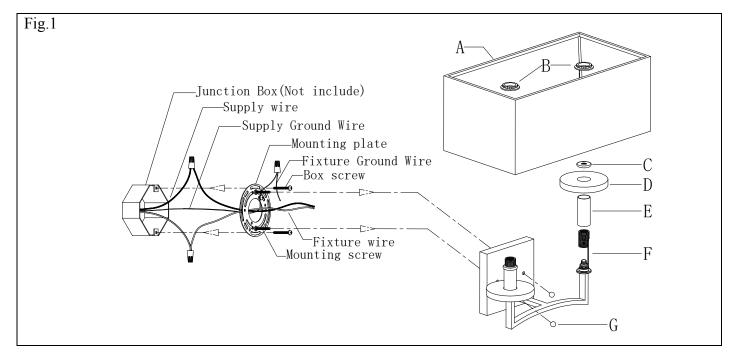


Fig.2 FIXTURE WIRES Black or Smooth	HOUSE WIRES Black (Hot)	FIXTURE WIRES White or Ribbed	HOUSE WIRES White (Neutra	FIXTURE WIRES Bare Copper (Ground) 1) Bar	HOUSE WIRES Green or re Copper(Grou	ınd)
---	----------------------------------	--	------------------------------------	--	--	------

