

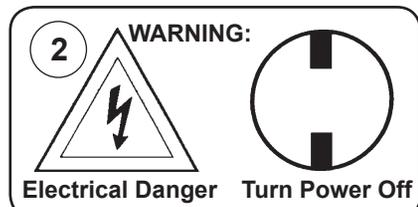


Instructions for electrician STEPS 2 - 21


WARNING: THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.

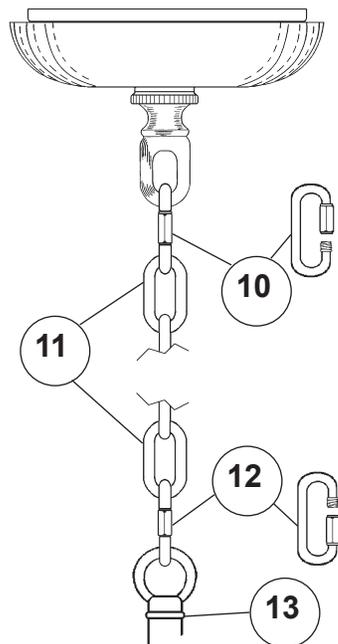

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

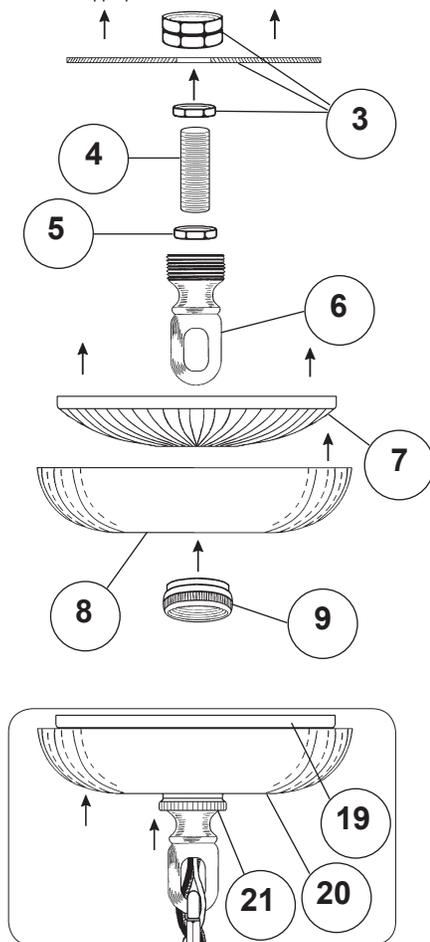


NOTE:
SLIDE LOOSE RING 2 ONTO
FRAME BEFORE ATTACHING
FRAME TO CHAIN!

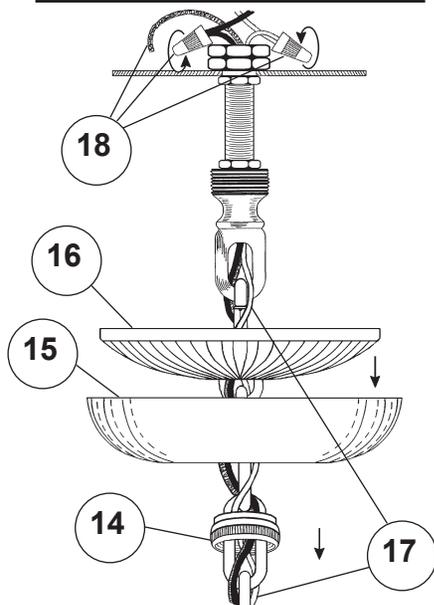

CHANDELIER 2642- _____ TRIM DIAGRAM

(Finish Option)

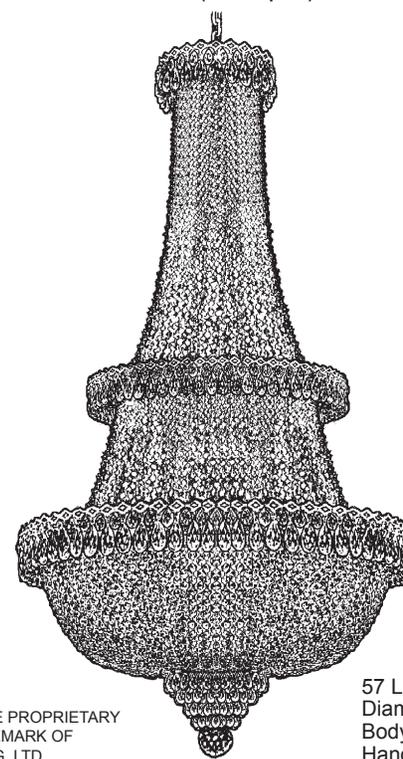

T HIS DESIGN IS THE PROPRIETARY
TRADE DRESS/TRADemark OF
SWAROVSKI LIGHTING, LTD.

57 Lights
Diameter: 34"
Body Length: 60"
Hanging Weight: 66 lbs.

SCHONBEK®

See diagram on back page
Follow steps in exact order
Save this trim diagram for future reference

1

IMPORTANT

Person who opens carton should record the following information for future service.

CODE # _____ Four-digit number on outside of carton.
PACKER # _____ See crystal package label.
ORDER # _____ See crystal package label.

Instructions for crystal trimming

STEPS 22 - 36

22





You will need 57 - B10
25 Watts Recommended
60 Watts Max


**Install bulb and be sure
to test fixture BEFORE
trimming.**

23 Attach the bottom finial section by attaching the jackchain into the half ball located on the bottom of the frame.


NOTE: Hang drop "C" from scallop, NOT through the loop on the gallery.

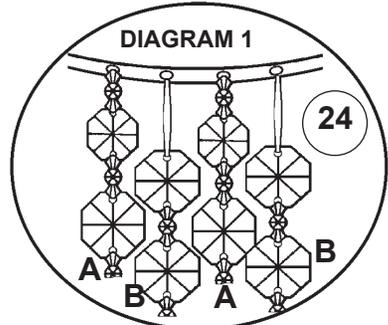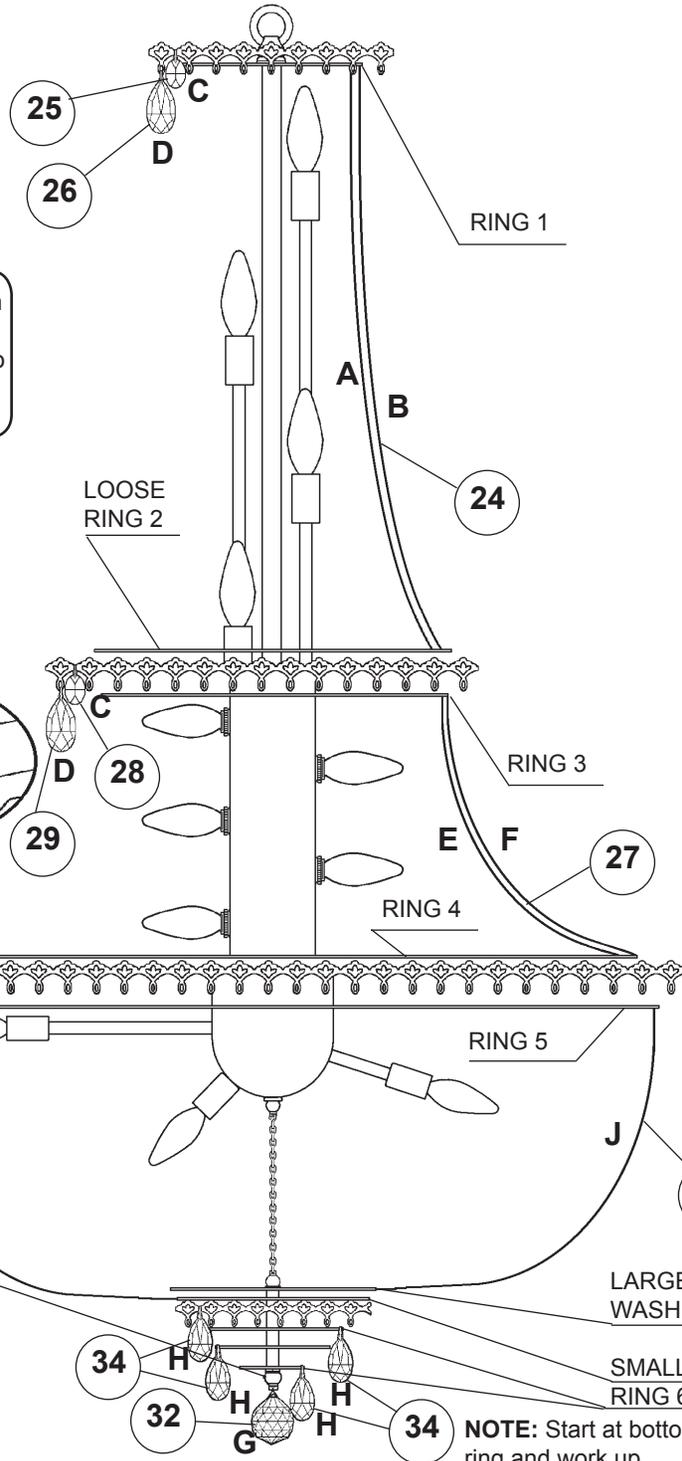

Small jewel at top and graduates to a larger jewel toward bottom of chain.

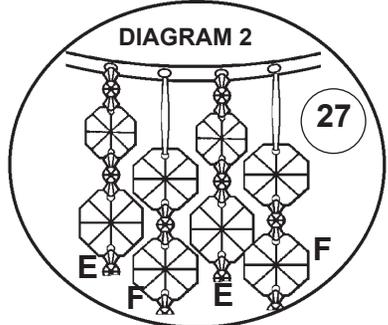

Large jewel at top and graduates to a smaller jewel toward bottom of chain. Start Chains "E" in hole of knotch on ring 3 and other end in hole of knotch on ring 4 (see diagram 3).

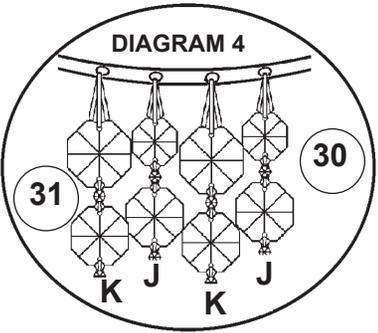

Large jewel at top and graduates to a smaller jewel toward bottom of chain.

33



**Tighten With
Tool Provided.**

NOTE: Raise the large finial washer for easier installation of Chains "K".

NOTE: Start at bottom ring and work up.

