




Contemporary Lighting

PRODUCT NAME: Kris Kross
ITEM NUMBER: E20095-PC

Please consult your electrician for hanging fixture and wiring.



The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels below is a list of recommended dimmers:


- Lutron MQ1-153M
- Lutron DV1-153P
- Lutron SC1-153P
- Lutron 6074-P0W
- Leutron 6074-P0W

Due to the inrush current voltage should not exceed 130 watts of product for a 600 watt dimmer.

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.


MADE IN CHINA
Page 1 of (2)

IMPORTANT: Turn OFF the power at the main fuse or circuit breaker box before starting installation




Locate all hardware & components before discarding packaging

1.)




Step 1: Remove mounting bracket (A) from canopy (B) and install to electrical box.

2.)



Step 2: Run wire through stems and combine stem lengths to meet desired mounting height. Wire fixture to wires in electrical box. The wires in the electrical box are connected to the mounting bar into the ceiling. Then install the mounting bar and canopy together by screw with C.

3.)



Step 3: Connect LED Strip Assembly (D) to the fixture, and secure using Allen screws.

Cleaning & Care:

Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.


Page 2 of (3)



Contemporary Lighting

PRODUCT NAME: Kris Kross
ITEM NUMBER: E20095-PC

Step 4: If wires are cut in the process of adjusting the height, please note the pendant wires consist of Black wire(Ground) and Red wire(Live). The two drivers are wired in parallel to the pendant wire, as shown below.

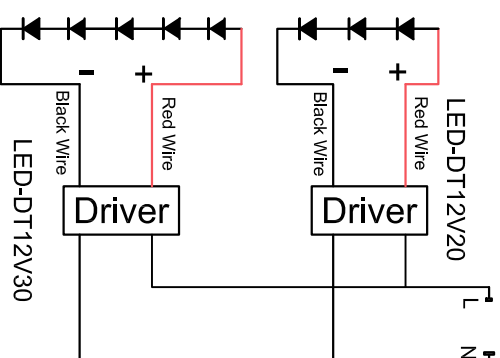

Page 3 of (3)