

Features

- Euro-style Door & Inline Panel
- 8" Euro-style pull handle
- 3/8" (10 mm) thick tempered glass available in Clear
- 1" adjustment range provides increased plumb and level tolerance
- Anodized aluminum hardware prevents rusting or corrosion
- Lineals are smooth and easy to clean.
- Available in two heights and four widths
- U-Channel width = 1 1/2"

Applicable Codes/Standards

Specified model meets or exceeds the following:

- ASTM C1464-06 and ASTM C1048
- Safety criteria CPSC16 CRF 1201 categories 1 & 2 and ANSI Z97.1
- SGCC Certification required.

Glass Option


- 3/8" Clear (CL)

Frame Options

- Polished Chrome (PC)
- Brushed Nickel (BN)
- Oil Rubbed Bronze (OB)

Installation Notes

Install this product according to the installation guide.

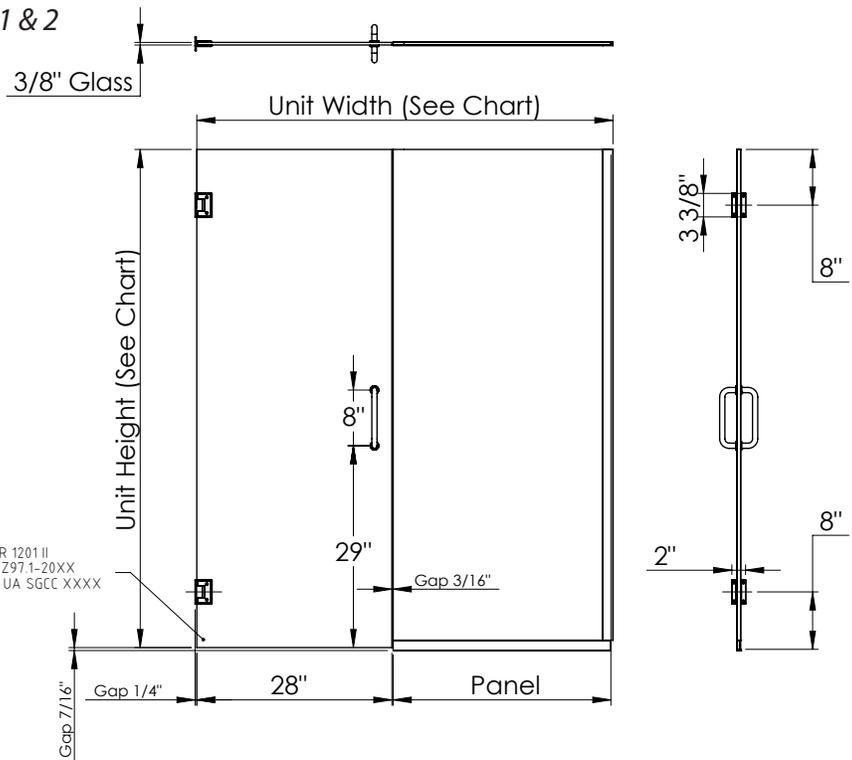

16 CFR 1201.11
ANSI Z97.1-20XX
10mm UA SGCC XXXX

GLASS SIZING CHART					
Unit Width		Glass Size (Inches) / Weight (lbs)			
Width		72" Unit Height		76" Unit Height	
		Panel	Door	Panel	Door
45" - 46"		16 ³ / ₈ " x 71 ¹³ / ₁₆ " - (41.33 lbs)	28" x 71 ⁹ / ₁₆ " - (70.96 lbs)	16 ³ / ₈ " x 75 ¹³ / ₁₆ " - (43.63 lbs)	28" x 75 ⁹ / ₁₆ " - (74.93 lbs)
46 ¹ / ₁₆ " - 47"		17 ³ / ₈ " x 71 ¹³ / ₁₆ " - (44.03 lbs)	28" x 71 ⁹ / ₁₆ " - (70.96 lbs)	17 ³ / ₈ " x 75 ¹³ / ₁₆ " - (46.48 lbs)	28" x 75 ⁹ / ₁₆ " - (74.93 lbs)
57" - 58"		28 ³ / ₈ " x 71 ¹³ / ₁₆ " - (71.69 lbs)	28" x 71 ⁹ / ₁₆ " - (70.96 lbs)	28 ³ / ₈ " x 75 ¹³ / ₁₆ " - (75.68 lbs)	28" x 75 ⁹ / ₁₆ " - (74.93 lbs)
58 ¹ / ₁₆ " - 59"		29 ³ / ₈ " x 71 ¹³ / ₁₆ " - (74.55 lbs)	28" x 71 ⁹ / ₁₆ " - (70.96 lbs)	29 ³ / ₈ " x 75 ¹³ / ₁₆ " - (78.70 lbs)	28" x 75 ⁹ / ₁₆ " - (74.93 lbs)