


Installation




Optional Pendant Mount Installation


Step 1: Bend the T-bar clips vertical on the back of the panel and attach the anchoring on the ceiling.

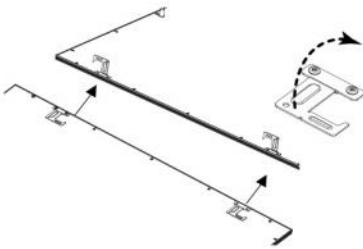

Step 2: Feed cable with "S" hooks through the hole of each T-bar clip and the anchoring. Measure desired cable length and then feed cables through each wire gripper in the same direction.

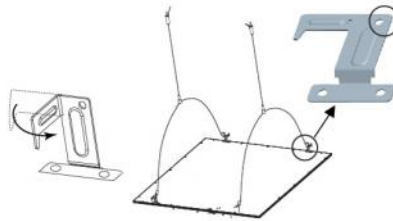


Step 3: Level the panel by fine tuning the length of the cable by pressing the strain reliefs and feed the wires in or out as necessary. Cut excess cable after final adjustment.

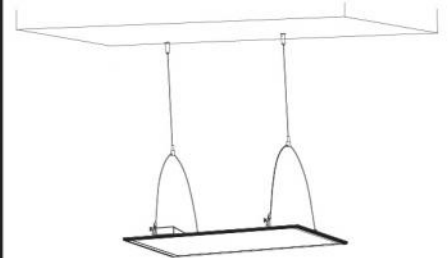


Optional Surface Mount Installation


Step 1: Assemble 3 sides of the surface mount frame using screws and mount the assembly to the ceiling.



Step 2: Without interfering power supply box with driver box, slide LED panel into frame.

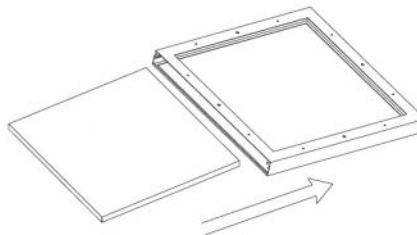

Step 3: Attach the 4th frame, secure with screws and tighten until snug.

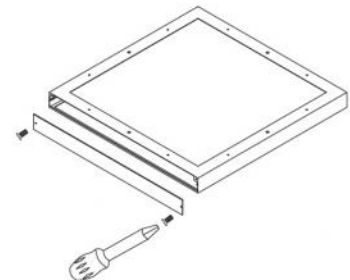


Installation




Wiring the Driver


STEP 1: Open the cover of junction box with philips screwdriver.



STEP 3: Put the cover back and tighten screw.




STEP 2: Remove round knock-out and connect conduit to wiring box with proper connectors: press the binding post with straight screwdriver, insert the wire and secure. For AC input, connect neutral wire to AC-N, live wire to AC-L, and ground wire to the chassis ground lug (marked with ⊕). For 0-10V dimmer wiring: connect dimmer+ wire to DIM+, and dimmer- wire to DIM-.

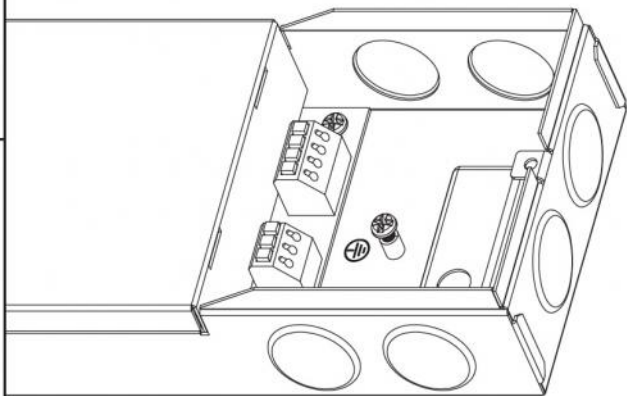


Recessed Installation in Suspended Grid Ceiling


Step 1: Move away ceiling tile.




Step 2: Connect power supply.



Step 3: Put the panel light into framework.




Step 4: Finish the installation.



T-bar clips should be bent out to provide additional safety and support.
Additional support means may be required by local or national codes.

Notes:

- Secure to grid per state and local codes.
- Ceiling grid must adequately support weight of fixture.

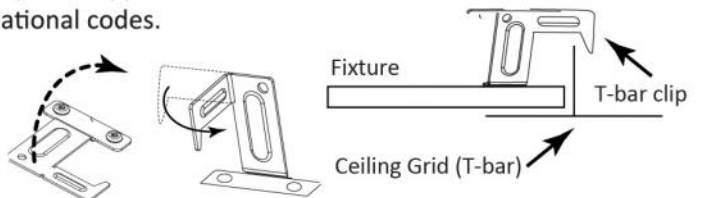



Surface Mount Kit

- Easy surface mount solution
- Simply install three of the four plates provided on the ceiling, slide the LED panel in, and secure the panel with the fourth plate.



Flange Drywall Kit

- Allows flush installation of LED panels into ceiling
- Acts like a T-Bar and leaves no depth



Suspension Kit

- Suspend any size of our LED panels
- Twist & lock feature increases stability



Emergency Backup Battery

- 90 minutes of backup power
- Provides 12W of continuous power