

Adjustable Shower Slide Bar Set Installation Manual

W-81(ES)

Warranty Duration

All components of this faucet system are covered under a lifetime limited warranty, ensuring they are free from defects in material and workmanship for the original purchaser.

Repair and Replacement

If the product shows defects in material or workmanship under normal use and within the warranty period, we will, at our discretion, either repair the product or provide a replacement at no cost to the original purchaser. Please note that proof of purchase (e.g., an invoice) is required when requesting service. The warranty does not cover damages caused by improper installation, misuse, or modifications.

Exclusions

We shall not be responsible for the following cases:

- Damage to the product caused by improper installation, misuse, unauthorized repair or replacement, or abuse (including damage during shipment).
- Damage to the product caused by improper dismantling after installation.
- Damage resulting from abnormal water pressure or impurities in water pipes, which is not covered under this warranty.
- Rust on the product due to insufficient care and maintenance, which is not covered under this warranty.
- Damage caused by natural disasters such as fire, flood, earthquake, lightning storms, etc., which is not covered under this warranty.

I hope this helps! If you have any further questions or concerns, please let me know.

Having Trouble? Contact us.

✉ Email: info@faucetsupport.com

☎ Toll Free: 1-888-969-6880



M8613
SFS-1135
Model:A



M8614
SFS-1136
Model:B

CONTENT

1.Adjustable Shower Slide Bar Set Installation Manual----- (1-7)

CONTENIDO



1.Manual de instalación del conjunto de barra deslizante -----(8-14)
ajustable para ducha

◆ Installation and Maintenance Matters

1. Check the accessories list to verify that all parts are complete in this package.
2. Do not disassemble the main body by yourself.
3. Connect inlet pipes to supply valves.
4. Make sure inlet pipes and supply valves have no impurities and are cleaned, with no impurities in the pipeline.
5. After installation, check all joints for leakages.
6. Do not leave the rain shower system exposed to a severely corrosive environment.

Do's



1. In order to keep the mixer surface bright, please clean the mixer regularly.
2. Rinse the faucet with clean water and wipe it with a soft cotton cloth.
3. Use one of the following cleaners to remove dirt from the surface: a. Mild liquid cleaner. b. Colorless glass cleaner and powder cleaner that do not cause abrasion and can be dissolved completely. c. Polish liquid that does not cause abrasion.




Don'ts

- a. Avoid using cleaning powder, harsh cleaning chemicals, brushes and coarse cloth to prevent scratching and friction.
- b. Do not use acid cleaners to clean the faucet as they may cause surface corrosion of the faucet. If the faucet is exposed to harmful acid substances, please rinse it immediately with water.

Tools Needed:




◆ **Adjustable Shower Slide Bar Set**
Model:A
Accessories List

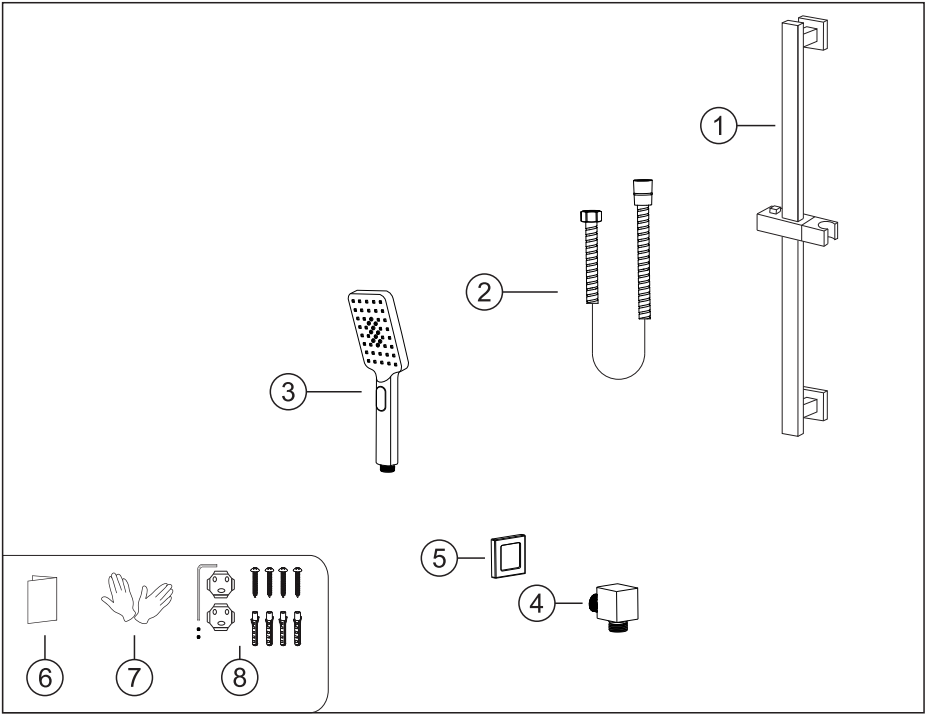


No.	Part name	Qty	No.	Part name	Qty
1	Slide bar	1	5	Connector flange	1
2	Shower hose	1	6	Instruction manual	1
3	Hand shower	1	7	Gloves	2
4	Connector	1	8	Slide bar parts	1set

◆ **Essential Dimensions & Water Pipe Line**

Unit: mm/inch






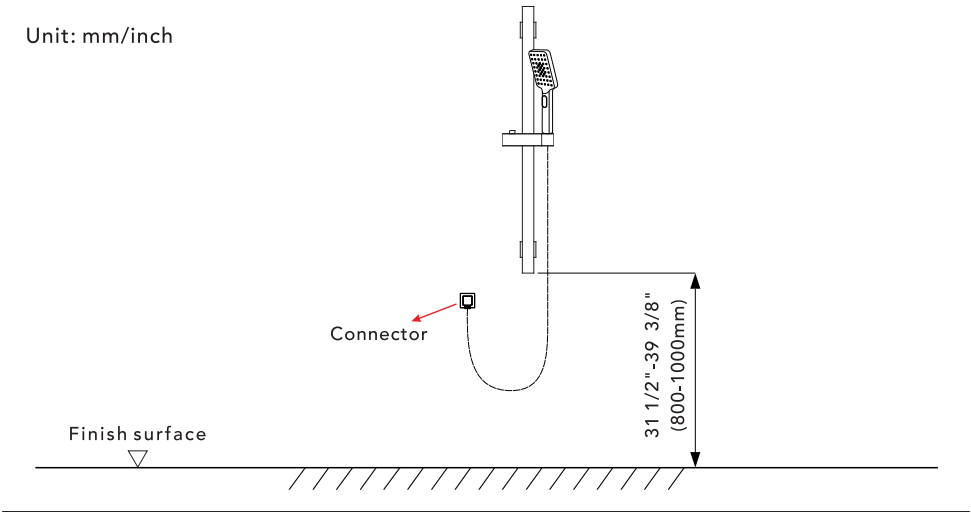


◆ **The Installation Depth of Connector**

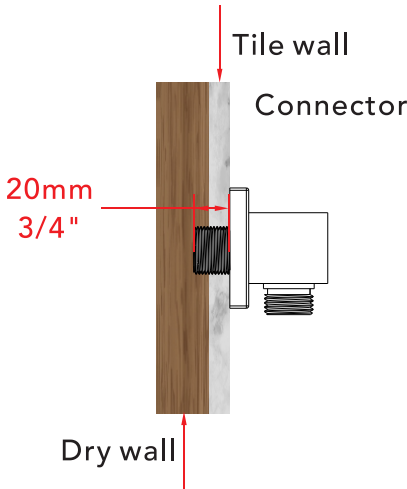

The thickness of the tile must be calculated for installation.
Connector size of male thread: USA: 1/2"-14NPT, Canada: 1/2"-14NPT, Europe: G1/2".

◆ Slide Bar Installation




1. Mark the drilling positions with a pen, drill holes using a 6mm electric drill, and insert the wall anchors. Finally, place the base and secure it with screws.
2. Insert the shower slide bar into the base, then tighten the screw. Installation complete.

Step1. Wrap the connector with Teflon tape, then screw the threaded end into the water pipe inside the wall.

Step2. Install the rubber pad onto the shower hose and connect it to the connector.


◆ **Adjustable Shower Slide Bar Set**
Model:B
Accessories List

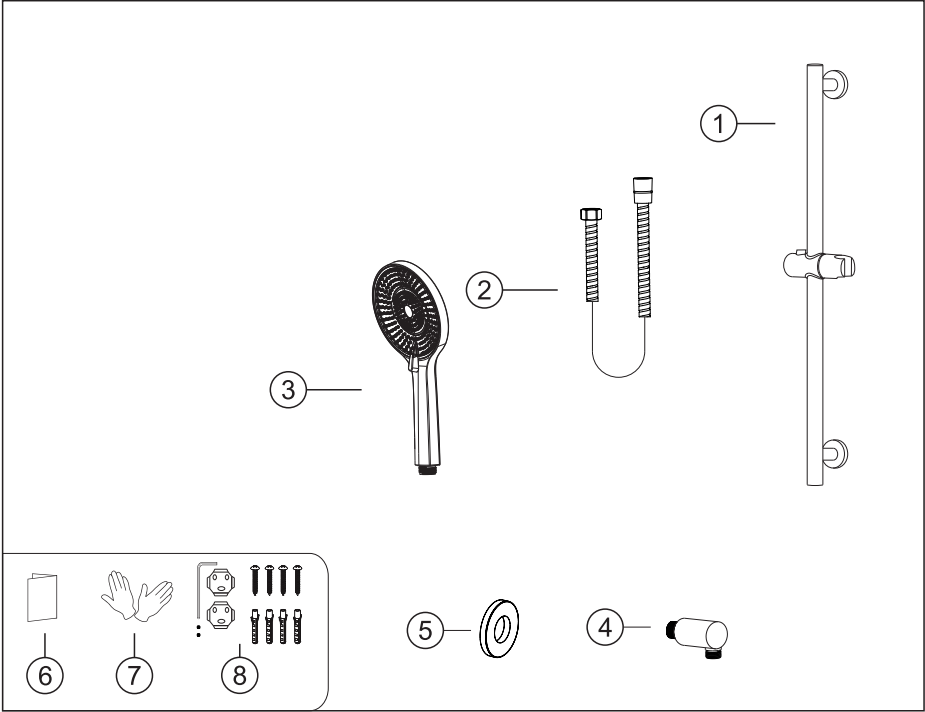


No.	Part name	Qty	No.	Part name	Qty
1	Slide bar	1	5	Connector flange	1
2	Shower hose	1	6	Instruction manual	1
3	Hand shower	1	7	Gloves	2
4	Connector	1	8	Slide bar parts	1set

◆ **Essential Dimensions & Water Pipe Line**

Unit: mm/inch






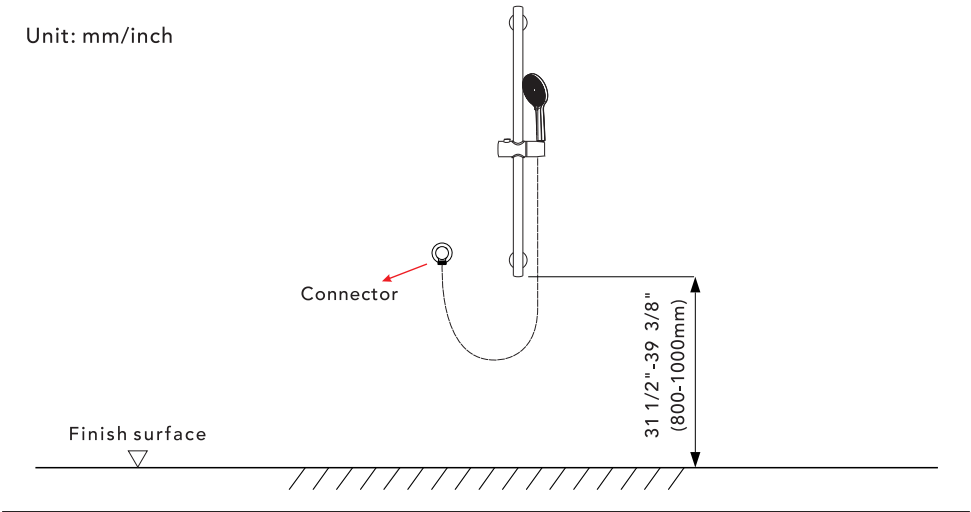


◆ **The Installation Depth of Connector**

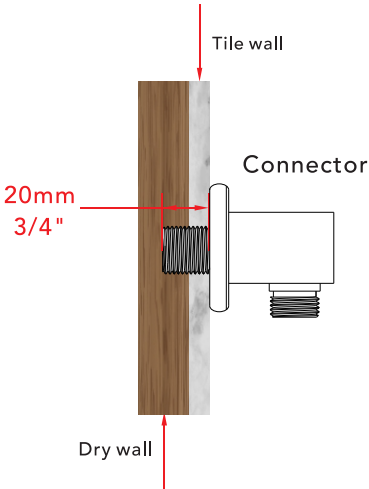

The thickness of the tile must be calculated for installation.
Connector size of male thread: USA: 1/2"-14NPT, Canada: 1/2"-14NPT, Europe: G1/2".

◆ Slide Bar Installation



1. Mark the drilling positions with a pen, drill holes using a 6mm electric drill, and insert the wall anchors. Finally, place the base and secure it with screws.
2. Insert the shower slide bar into the base, then tighten the screw. Installation complete.

Step 1. Wrap the connector with Teflon tape, then screw the threaded end into the water pipe inside the wall.



Step 2. Install the rubber pad onto the shower hose and connect it to the connector.

♦ Instalación y cuestiones de mantenimiento

1. Verifique la lista de accesorios para comprobar que todas las partes están completas en este paquete.
2. No desmonte el cuerpo principal por sí mismo.
3. Conecte las tuberías de entrada a las válvulas de suministro.
4. Asegúrese de que las tuberías de entrada y las válvulas de suministro no tengan impurezas y estén limpias, sin impurezas en la tubería.
5. Después de la instalación, verifique todas las uniones para detectar fugas.
6. No deje el sistema de ducha tipo lluvia expuesto a un ambiente severamente corrosivo.

Hacer



1. En para mantener la superficie de la batidora brillante, limpie el mezclador regularmente.
2. Inse el grifo con agua limpia y límpielo con un suave ropa de algodón.
3. Utilice uno de los siguientes limpiadores para eliminar la suciedad de la superficie: a. Limpiador líquido suave. b. Limpiador de vidrio incoloro y limpiador en polvo que no causen abrasión y que se puedan disolver completamente. c. Líquido pulidor que no cause abrasión.



No es decir

- A. Valte con polvo de limpieza, productos químicos de limpieza duros, cepillos y tela gruesa para evitar rascar y fricción.
- B. No use limpiadores de ácidos para limpiar el grifo, ya que pueden causar corrosión superficial del grifo. Si el grifo está expuesto a sustancias ácidas dañinas, enjuague inmediatamente con agua.


HERRAMIENTAS NECESARIAS:



♦ **Conjunto de barra deslizante ajustable para ducha**

Modelo:A


Lista de accesorios

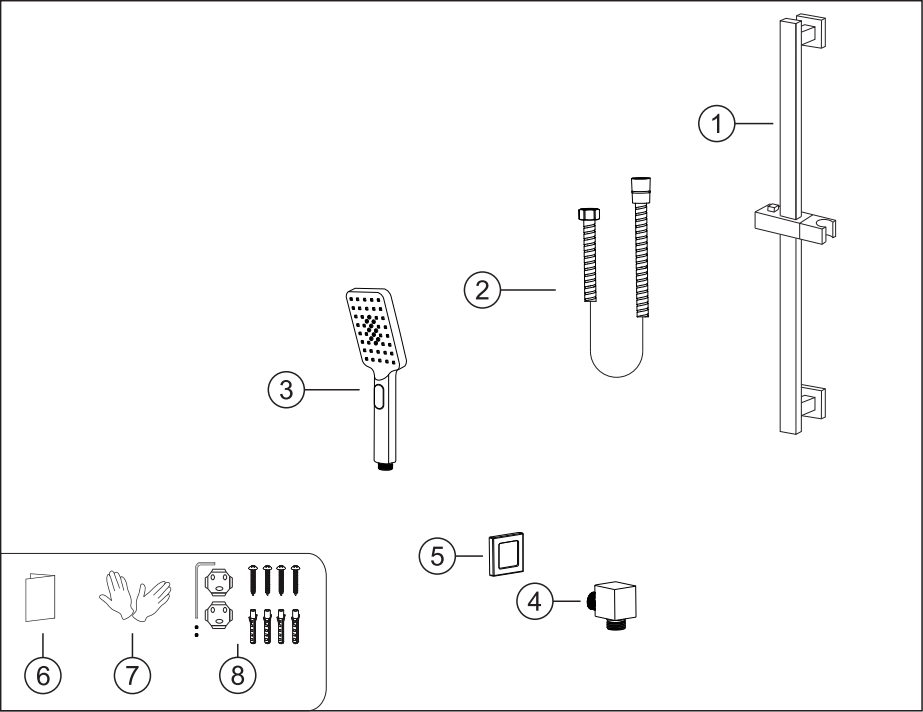


N.º	Nombre de la pieza	Cant	N.º	Nombre de la pieza	Cant
1	Barra deslizante	1	5	Brida de conector	1
2	Manguera de ducha	1	6	Manual de instrucciones	1
3	Ducha de mano	1	7	Guantes	2
4	Conector	1	8	Partes de la barra deslizante	1 juego

◆ Dimensiones esenciales y línea de tubería de agua

Unidad: mm/pulgada

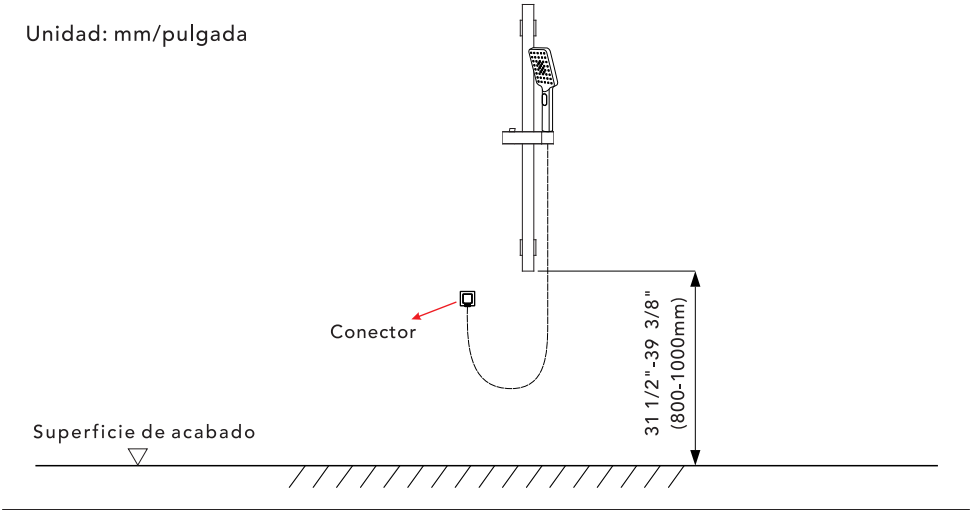







◆ La profundidad de instalación del conector

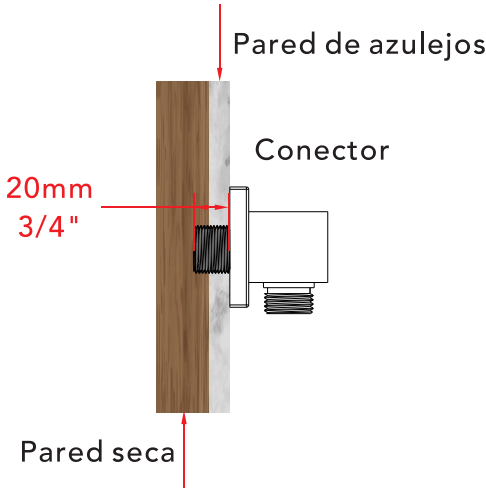

El grosor del azulejo debe calcularse para la instalación.

Tamaño del conector de rosca macho: EE.UU.: 1/2"-14NPT, Canadá: 1/2"-14NPT, Europa: G1/2".

◆ Instalación de la barra deslizante



1. Marca las posiciones de perforación con un bolígrafo, haz los agujeros con un taladro eléctrico de 6 mm e inserta los tacos de pared. Finalmente, coloca la base y fíjala con tornillos.

2. Inserta la barra deslizante de ducha en la base y luego aprieta el tornillo.
Instalación completa.


Paso 1. Envuelve el conector con cinta de teflón y enrosca el extremo roscado en la tubería de agua dentro de la pared.

Paso 2. Instala la almohadilla de goma en la manguera de ducha y conéctala al conector.

♦ Conjunto de barra deslizante ajustable para ducha

Model:B


Lista de accesorios

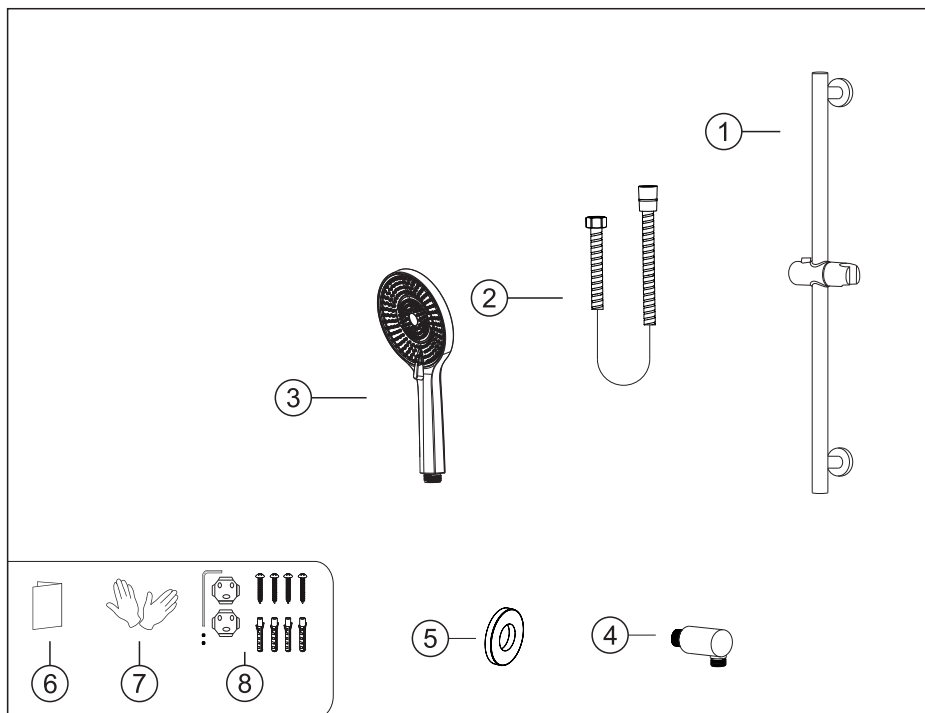


N.º	Nombre de la pieza	Cant	N.º	Nombre de la pieza	Cant
1	Barra deslizante	1	5	Brida de conector	1
2	Manguera de ducha	1	6	Manual de instrucciones	1
3	Ducha de mano	1	7	Guantes	2
4	Conector	1	8	Partes de la barra deslizante	1 juego

◆ Dimensiones esenciales y línea de tubería de agua

Unidad: mm/pulgada

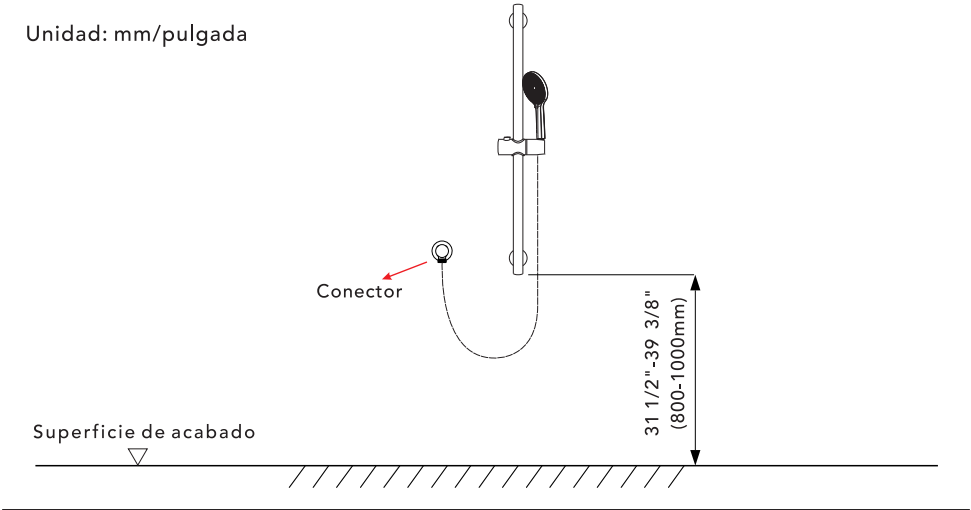






◆ La profundidad de instalación del conector

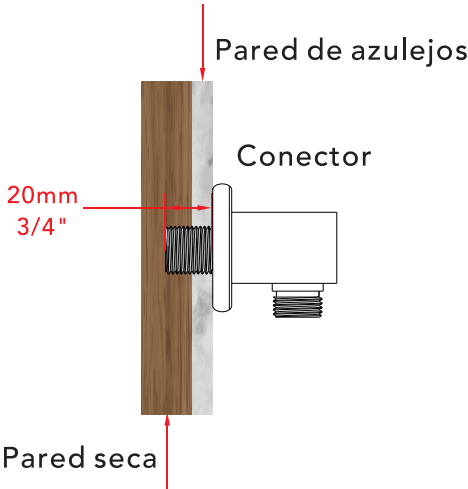

El grosor del azulejo debe calcularse para la instalación.

Tamaño del conector de rosca macho: EE.UU.: 1/2"-14NPT, Canadá: 1/2"-14NPT, Europa: G1/2".

◆ Instalación de la barra deslizante



1. Marca las posiciones de perforación con un bolígrafo, haz los agujeros con un taladro eléctrico de 6 mm e inserta los tacos de pared. Finalmente, coloca la base y fíjala con tornillos.

2. Inserta la barra deslizante de ducha en la base y luego aprieta el tornillo.
Instalación completa.

Paso 1. Envuelve el conector con cinta de teflón y enrosca el extremo roscado en la tubería de agua dentro de la pared.

Paso 2. Instala la almohadilla de goma en la manguera de ducha y conéctala al conector.