
MODEL: 324650RB PACKING DIAGRAM -CARDBOARD .CA TITLE 20-FINIAL, HARP & RUBBER WASHER.--SHADE CARDBOARD-CENTER TUBE METAL PLATE, BASE, METAL WASHER, NUT-AND WRENCH. & LOWER POLE. 4 UPPER POLE ASSEMBLY--STYROFOAM: 12 KGS.

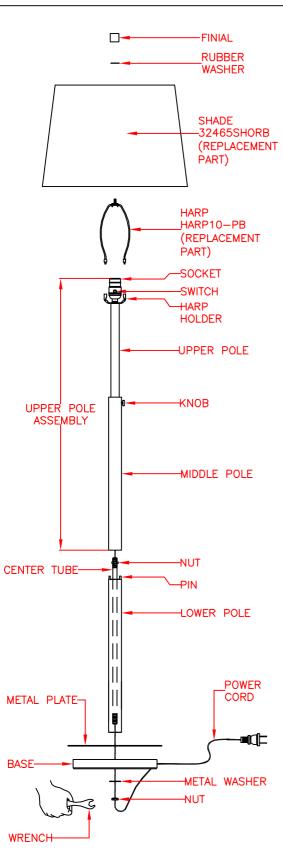

AVAILABLE PARTS ARE: 32465SHORB (SHADE) HARP10-PB (HARP)

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

READ INSTRUCTIONS ALL THE WAY THROUGH PRIOR TO ASSEMBLY.

THIS LAMP SHOULD TAKE APPROXIMATELY 15 MINUTES TO ASSEMBLE.

MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.

UNPACK THE LAMP
YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS IN THE PACKAGE: FINIAL, RUBBER WASHER, SHADE, HARP, UPPER POLE ASSEMBLY, CENTER TUBE, LOWER POLE, METAL PLATE, BASE, METAL WASHER, (2) NUTS AND WRENCH. TO PROTECT THE FINISH, PLACE ALL PARTS ON A SOFT SURFACE.

ASSEMBLE THE LAMP

- 1. CAREFULLY ORGANIZE AND PLACE ALL PARTS ON A SMOOTH, FLAT SURFACE. LINE UP ALL OF THE PARTS ACCORDING TO THE ASSEMBLY DIAGRAM.
- 2. SCREW THE CENTER TUBE TO BOTTOM OF THE UPPER POLE ASSEMBLY AND SECURE WITH A NUT.
- 3. SLIDE THE LOWER POLE OVER THE CENTER TUBE, MAKE SURE THE PINS ARE INSERTED INTO THE HOLE ON BOTTOM OF THE UPPER POLE ASSEMBLY.
- 4. INSERT END OF THE CENTER TUBE INTO THE HOLE IN METAL PLATE AND BASE, AND THEN SECURE WITH METAL WASHER AND NUT. (WRENCH INCLUDED)
- SQUEEZE LEGS OF THE HARP TOGETHER AND INSERT THE TWO ENDS BETWEEN THE PRONGS OF THE HARP HOLDER.
- 6. PLACE SHADE ONTO HARP, THEN SECURE WITH RUBBER WASHER AND FINIAL.
- 7. INSTALL A 150 WATT MAXIMUM MEDIUM BASE TYPE "A" 3-WAY BULB (NOT INCLUDED) INTO SOCKET.
- 8. YOU CAN ADJUST THE LAMP HEIGHT BY LOOSING THE KNOB. NOTE: GENTLY PULL CORD OUT OF THE BOTTOM OF THE LAMP WHEN ADJUSTING LAMP UPPER POLE TO THE DOWN POSITION.
- 9. PLUG THE POWER CORD INTO AN OUTLET AND TURN ON AT SWITCH.

BULB REPLACEMENT

- 1. BEFORE REPLACING THE BULB, BE SURE THAT THE SHADE AND BULB ARE COOL AND LAMP IS UNPLUGGED.
- 2. UNSCREW EXISTING BULB FROM SOCKET AND REPLACE WITH A NEW BULB. PLUG POWER SUPPLY CORD BACK INTO OUTLET.

TROUBLE SHOOTING

- 1. IF YOUR LAMP DOES NOT LIGHT, CHECK PLUG AT THE OUTLET. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE POWER OUTLET.
- 2. IF LAMP STILL DOES NOT LIGHT, UNPLUG FROM OUTLET. CHECK THE BULB FOR A BROKEN FILAMENT. REPLACE BULB IF NECESSARY, PLUG IN LAMP AND TURN IT ON.
- 3. IF THE LAMP STILL DOES NOT LIGHT, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

IMPORTANT SAFETY INSTRUCTIONS

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF THE PLUG DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

