


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0148

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):



Mounting plate (A)



Mounting Screw (B)



Wire Connector(C)



Fixture Mounting Screw(D)



Green GroundingScrew (E)



Lock Nut (F)




Ball Nut (G)

## Installation Steps

**Turn off the power at fuse or circuit box**

1. Attach the two fixture mounting screws to the mounting plate , and Adjust the length of the fixture mounting screws if necessary.
2. Attach the mounting plate to the outlet box using two mounting screws.
3. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire connectors:
  - The black (hot) wires from the fixture to the black (hot) wire from the power source.
  - The white (neutral) wires from the fixture to the white (neutral) wire from the power source.
  - Attach the fixture grounding wire to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with the wire connector. Carefully put the wires back into the outlet box.
4. Attach the ceiling pan to the mounting plate by inserting two fixture mounting screw heads into the key holes, and rotate the ceiling pan until it locks in place. Then secure the screws tightly.
5. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
6. Secure the reticulation into the canopy of the ceiling pan with 4 Screws until tightened.

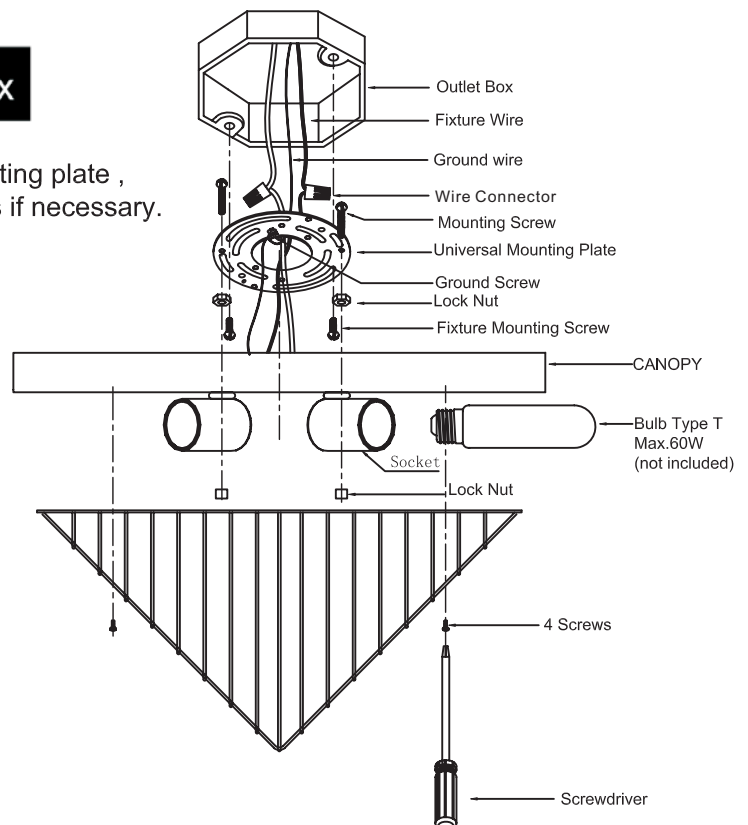

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:



Mounting plate (A)



Mounting Screw (B)



Wire Connector(C)



Fixture Mounting Screw(D)



Green GroundingScrew (E)




Lock Nut (F)




Ball Nut (G)

Mounting Hardware  
5754MM (1 SET)

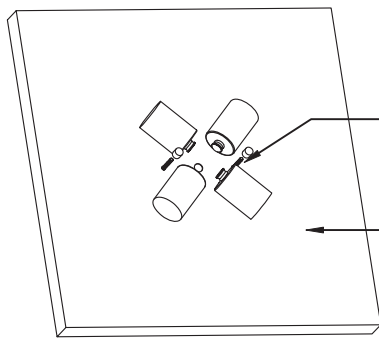

Mounting Screw

Canopy

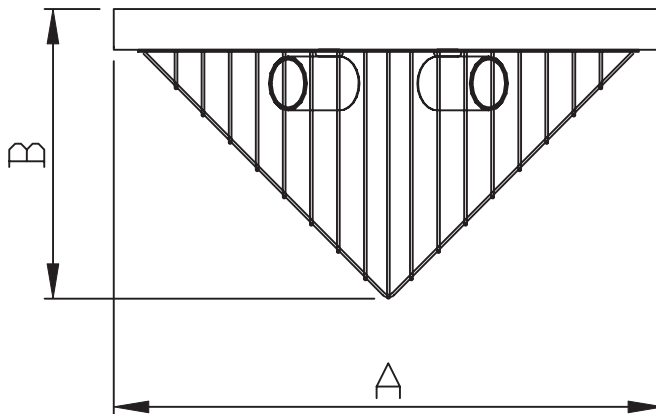

A : 16"L  
B : 8 1/4"H