

Amalia 2 and 3 Light Vanity Strip

VS46002, VS46003

1.1

FEISS®

EST. 1955

Wall

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This product may be dimmed with a standard incandescent dimmer.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

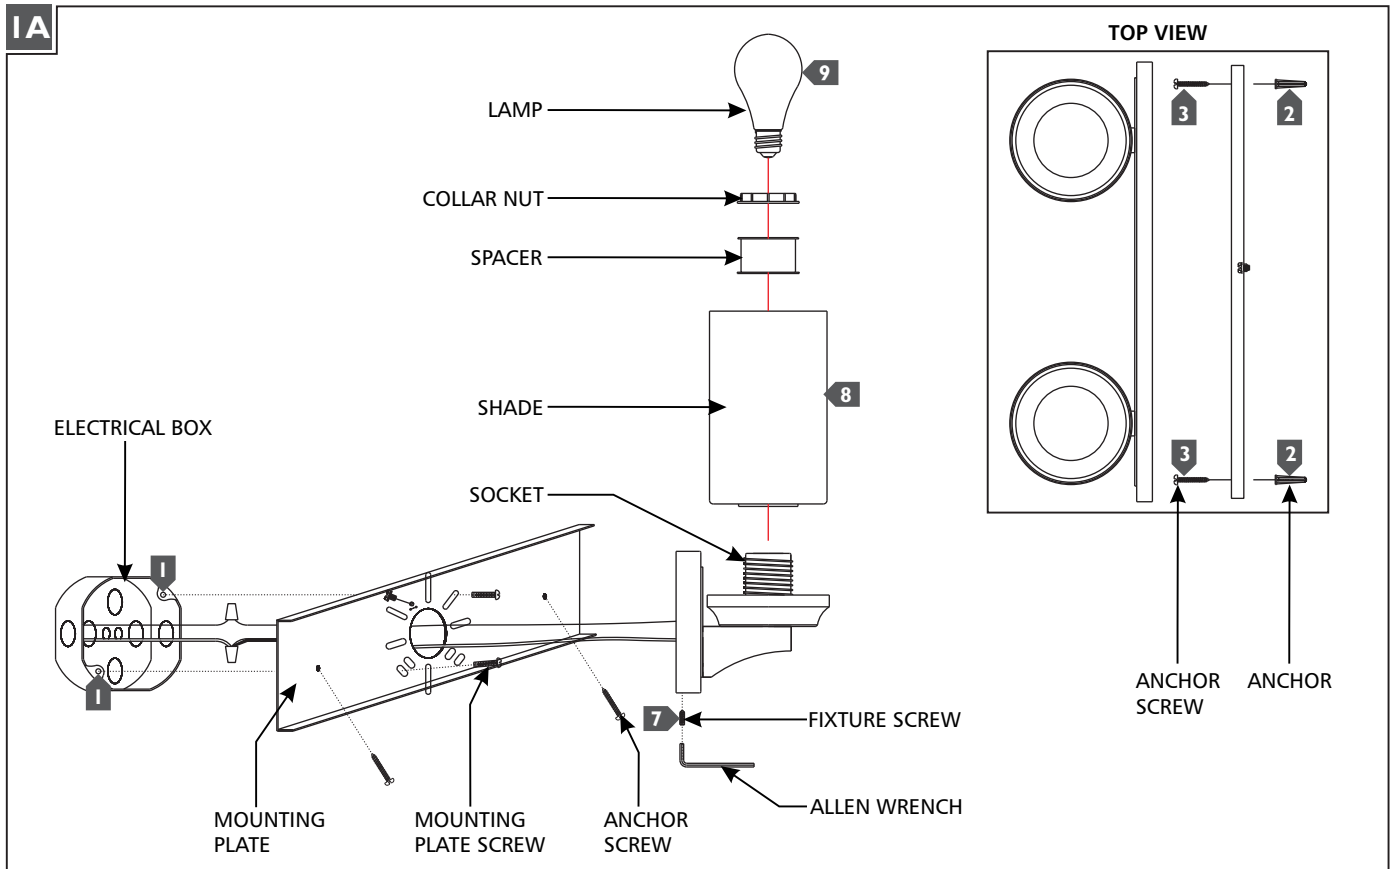

- 1** Secure the mounting plate to the electrical box with two mounting plate screws.
- 2** Align the anchors with the mounting plate holes and install them by pushing them into the wall.
- 3** Screw the anchor screws into the anchors.
- 4** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 5** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 7** Neatly place all the wires into the electrical box, mount the fixture base onto the mounting plate, and secure it with the fixture screws.
- 8** Install the shades and spacers by placing them over the sockets and securing them with the collar nuts.
- 9** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.

Utiliser les conducteurs d'alimentation supérieure à 90° c.

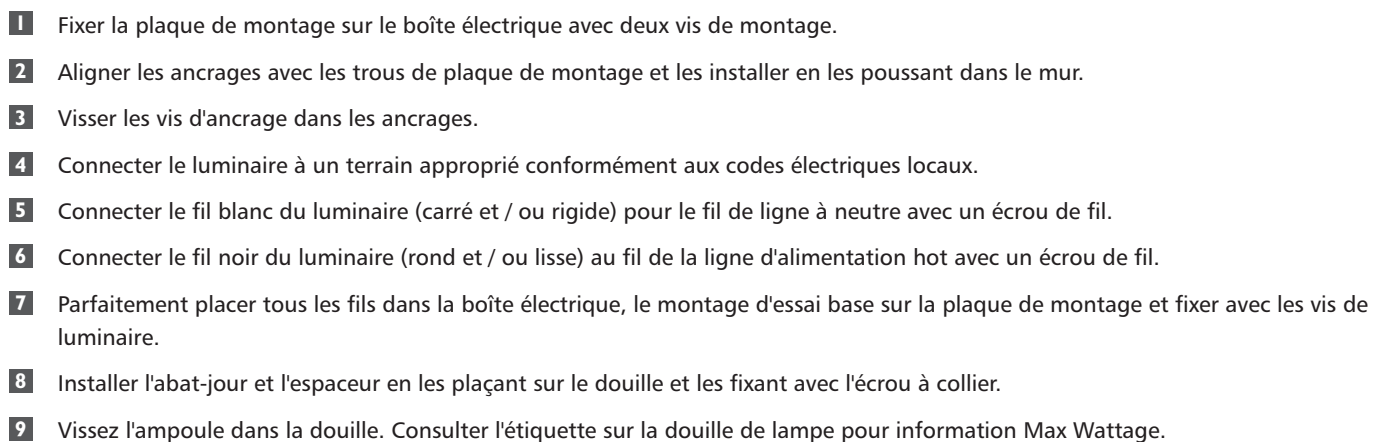


PRECAUCIÓN: RIESGO DE INCENDIO

Este producto debe instalarse de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los riesgos que conllevan.

Utilizar conductores de suministro mínimo 90° c.

IA

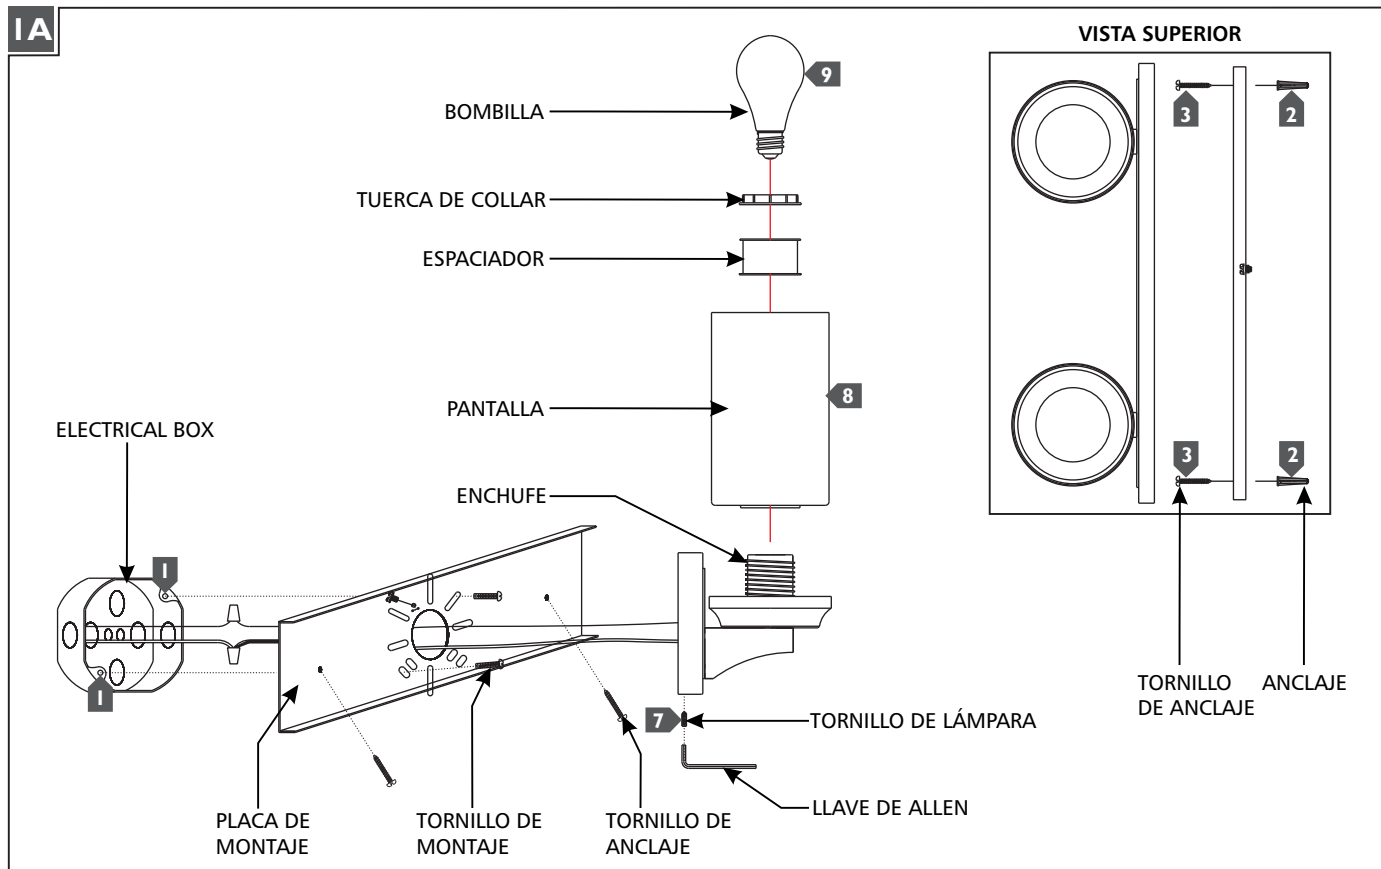

- 1** Fije la placa de montaje a la caja eléctrica con dos tornillos de montaje.
- 2** Alinee los anclajes con los agujeros de la placa de montaje y instálelos empujándolos hacia la pared.
- 3** Atornille los tornillos de anclaje en los anclajes.
- 4** Conecte la lámpara a una puesta a tierra adecuada de acuerdo a los códigos eléctricos locales.
- 5** Conecte el cable blanco de la lámpara (cuadrado y / o rígido) al cable de la línea de alimentación neutra con una tuerca para cable.
- 6** Conecte el cable negro de la lámpara (redonda y / o suave) al cable de la línea eléctrica caliente con una tuerca para cable.
- 7** Cuidadosamente coloque todos los cables en la caja eléctrica, instale el base de la lámpara sobre la placa de montaje y asegúrelo con los tornillos de la lámpara.
- 8** Instalar las pantallas y los espaciadores por colocarlos sobre los enchufes y asegurándolos con la tuerca de collar.
- 9** Enrosque las bombillas en los enchufes. Consulte la etiqueta en el enchufe de la lámpara para información sobre la Max Wattage.

SAVE THESE INSTRUCTIONS!

FEISS[®]

EST. 1955

7400 Linder Ave, Skokie, IL 60077

800.969.3347

www.Feiss.com

© 2015 Feiss. All rights reserved. The "Feiss" graphic is a registered trademark of Feiss. Feiss reserves the right to change specifications for product improvements without notification.
A Generation Brands Company