



### Single Handle Tub/Shower Valve


- Combo CXC and IPS Inlet and Outlet
- Cartridge Ships with Trims
- Brass Inlet Stops With Backflow preventors
- Stainless Steel Mounting Bracket
- Test Cap allows Pressure Testing 150 PSI Max
- Square Mud Guard with Leveler allows right angle cuts
- Thin Wall Mounting
- Back to Back Installation





**Note:- Valve can be tested When Test Cap installed with air (150 PSI) or water (150 PSI).**

Note: Cartridge operational at pressures 20 PSI to 100 PSI.


V-2300B Flow Rate (GPM) Vs Pressure (PSI) For Tub Port\*

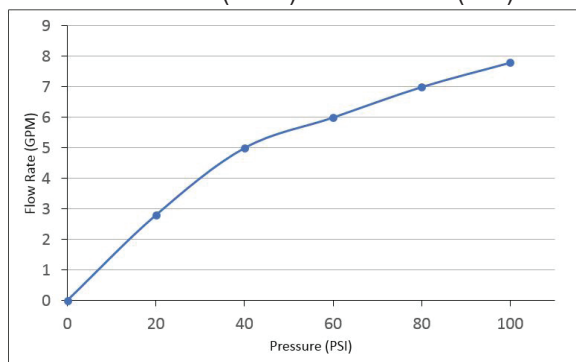

\*Note: This information is provided for reference only. Actual Flow Rate may vary depending on installation and inlet pressures.

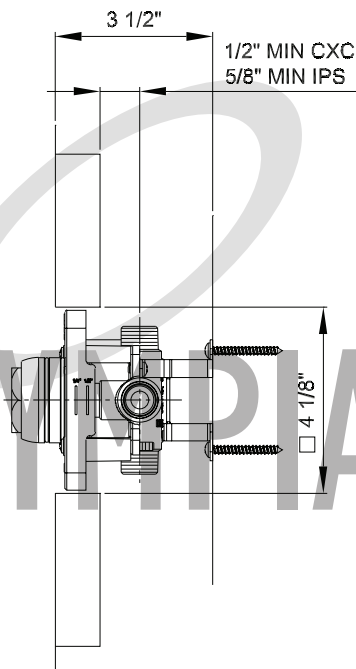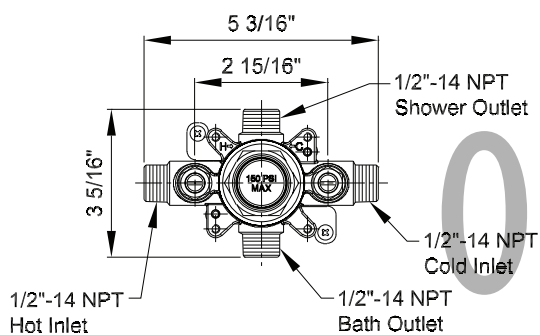

THICK WALL

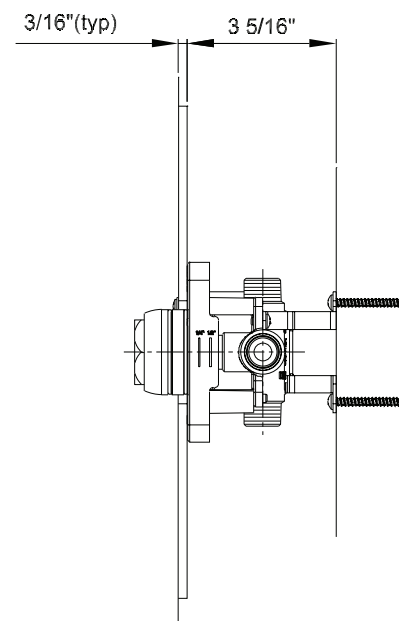

THIN WALL