

# **Verdera®** Medicine Cabinet K-99006

#### **Features**

- Anodized aluminum construction with a durable rust-free and chip-free finish.
- Three adjustable glass shelves.
- Full-overlay mirrored door.
- Mirrored interior.
- Two-way adjustable hinges with 108-degree opening capability for easy cabinet access.
- Can be installed with left- or right-hand swing.
- Includes mounting hardware for surface or recessed installation.
- Requires K-99012 or K-99675 side mirror kit (sold separately) for surface mount installation.

#### Material

Anodized aluminum.

### **Required Products/Accessories**

K-99675 Medicine Cabinet Wood Side Kit or

K-99012 mirrored side kit for medicine cabinet

### Optional Products/Accessories

K-99662-15 Medicine Cabinet Surround

K-99662-40 Medicine Cabinet Surround

K-99661-15 Medicine Cabinet Surround

K-99661-24 Medicine Cabinet Surround

K-99662-24 Medicine Cabinet Surround

K-99663-24 Medicine Cabinet Surround



### Codes/Standards

None Applicable


## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.







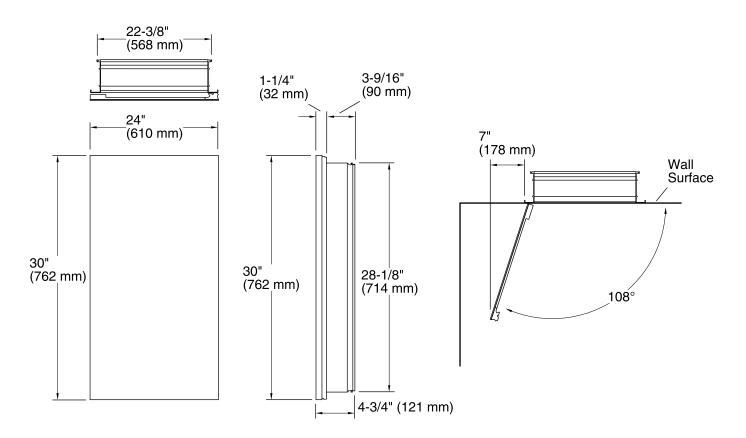

#### **Technical Information**

All product dimensions are nominal.

### **Recess-Mount Cutout:**

Width: 22-1/2" (572 mm)
Height: 28-1/4" (718 mm)
Depth: 3-11/16" (94 mm)

#### **Notes**

Install this product according to the installation guide.

IMPORTANT! For recess mounting, the wall cavity must be framed and cabinet secured to framing studs. Reroute any electrical wires or water supply piping from the wall cavity. If you encounter drain or vent piping, or if your wall is load-bearing, consult a professional before proceeding.

For surface mounting, use anchors (not provided) rated for the loaded weight of this product. Refer to the anchor manufacturer's instructions.

When determining the height of the cabinet, ensure the mirrored door will clear all obstacles (such as a faucet). A minimum distance of 3" (76 mm) is required.

This cabinet is designed for either right or left door swing. Check for obstructions.

Cutout for recess-mount installations: 22-1/2" (572 mm) width x 28-1/4" (718 mm) height x 3-11/16" (94 mm) depth.

