

MODEL: SLO505A0

LOTUS FLOATING FOUNTAIN ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS


UNPACK THE PACKAGE:

YOU SHOULD HAVE RECEIVED BELOW PARTS:

- 1PC LOTUS LEAF
- 1PC LOTUS FLOWER
- 1PC 12-HOLE DAISY JET
- 1PC 7-HOLE DAISY JET
- 1PC FOUNTAIN HEAD ADAPTOR
- 1PC PUMP OUTLET ADAPTOR
- 1PC WATER FLOW VALVE
- 1PC PUMP WITH 5M CABLE
- 1PC SOLAR PANEL
- 1PC SOLAR PANEL BRACKET
- 1PC EXTENSION TUBE
- 1PC GROUND SPIKE


1. ASSEMBLE THE LOTUS FOUNTAIN:

IDENTIFY A SUITABLE AREA IN YOUR POND FOR THE LOTUS FLOATING FOUNTAIN. PUT TOGETHER THE LOTUS FOUNTAIN WITH THE PUMP. A WATER FLOW VALVE IS INCLUDED IN THE PACKAGE, YOU CAN USE IT TO ADJUST THE FOUNTAIN HEIGHT TO FIT YOUR POND SIZE.

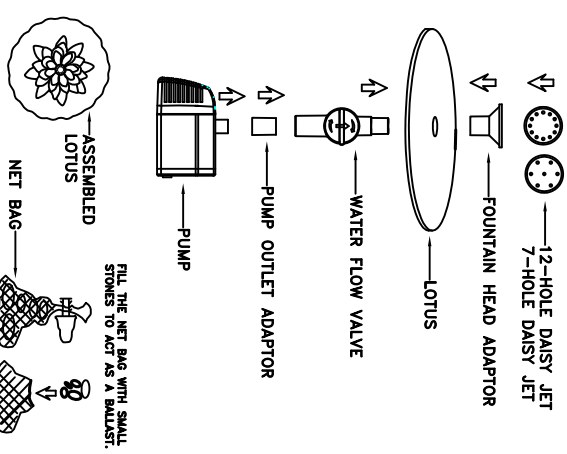


IN ORDER TO KEEP THE LOTUS FOUNTAIN FLOATING IN DESIRED POSITION IN YOUR POND AND STOP WATER LOSS FROM THE POND, A NET BAG AND WIRE PACK IS PROVIDED TO FIX THE FLOATING LOTUS FOUNTAIN IN PLACE. SIMPLY FILL THE NET BAG WITH SMALL GRAVELS AND SIZE THE WIRE LENGTH TO THE CORRECT DEPTH OF YOUR POND, THEN TIE THE SIZED WIRE TO THE FILLED NET BAG AND THE PUMP. NOW THE FILLED NET BAG WILL ACT AS AN ANCHOR TO KEEP YOUR LOTUS FOUNTAIN IN POSITION AND STOP IT FROM MOVING AROUND.

2. JOIN THE BRACKET, TUBES AND SPIKE TOGETHER AND THEN ATTACH THE SOLAR PANEL TO THE BRACKET. SLIDE THE HOLDING BRACKET INTO THE INSIDE LIP OF THE TOP HALF OF THE SOLAR PANEL FRAME. THE HOLDING BRACKET HOLDS THE WEIGHT OF THE SOLAR PANEL. THE DIRECTION TOWARDS THE SUNLIGHT CAN BE ADJUSTED WITH THE WINGNUT. SEE DIAGRAM.



3. INSERT THE SPIKE INTO THE GROUND. POSITION THE SOLAR PANEL TO FACE SOUTH (in Northern Hemisphere) AS MUCH AS POSSIBLE TO MAKE THE MOST OF THE DAYLIGHT HOURS. IT IS IMPORTANT TO ANGLE THE SOLAR PANEL TO FACE SUN WHEN SUN IS AT ITS HIGHEST POINT. ENSURE THE SOLAR PANEL IS NOT SHADED BY TREES, SHRUBS OR BUILDINGS.

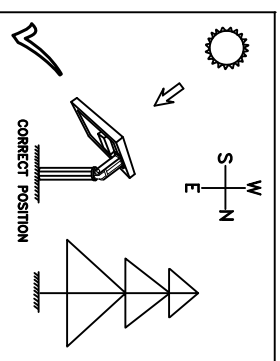


MODEL: SLO505A0

LOTUS FLOATING FOUNTAIN OPERATING INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

4. TWIST PUMP PLUG SLIGHTLY AND PUSHING IT INTO THE [PUMP] SOCKET, MAKE SURE ITS SEALING RING IS FULLY IN GROOVE, NOW YOUR SOLAR PUMP IS READY TO USE. IT WILL BEGIN TO WORK WHEN RECEIVING GOOD DIRECT SUNLIGHT.

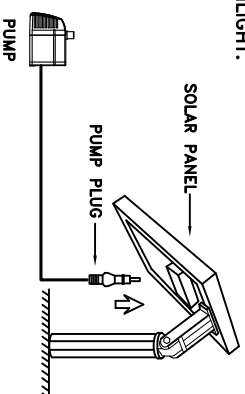

5. PERFORMANCE OF PUMP:

THIS PRODUCT IS DESIGNED FOR SUMMER USE BUT ALSO WORKS IN SPRING AND AUTUMN AS LONG AS THE SUN LIGHT CONDITION IN YOUR REGION IS GOOD ENOUGH.

THE PERFORMANCE OF THE PUMP DEPENDS ON THE ORIENTATION OF THE SOLAR PANEL TOWARD THE SUN AND THE SUNLIGHT STRENGTH. THE MAXIMUM DATA OBTAINED UNDER OPTIMAL CONDITIONS. A FEATURE IN THE SHADE OR IN POOR WEATHER CAN NOT BE GUARANTEED.

6. PROBLEM SHOOTING:

CHECK SOLAR PANEL, PUMP CONNECTED WELL.


CHECK SOLAR PANEL CORRECTLY POSITIONED IN SUNNY PLACE. ENSURE THE SOLAR PANEL IS NOT SHADED BY TREES, SHRUBS OR BUILDINGS.

CHECK THE PUMP IMPELLER BLOCKED BY DEBRIS

CHECK THE PUMP MAY BE "AIR LOCKED", TURN ON/OFF THE PUMP SEVERAL TIMES TO CLEAR ANY AIR THAT MAY HAVE BEEN TRAPPED.

7. MAINTENANCE OF PUMP

IF YOU FIND THE PUMP START LOSING POWER OR STOP WORKING, CHECK THE PUMP FILTER AND IMPELLER BLOCKED, CLEAR THEM WITH WATER.

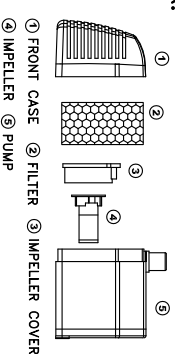

8. TECHNICAL DATE

MAX. PUMP CAPACITY: 180LPH
MAX. PUMP HEIGHT: 50CM /20"
WORKING VOLTAGE: DC5V -DC8V
MAX. WORKING POWER: 0.54W-1.0W
PROTECTION GRADE OF PUMP: IP68
SOLAR PANEL: 1.6W-8V-0.2A
SOLAR PANEL SIZE: 190X150X18MM
PROTECTION GRADE: IP44

9. WINTER PROTECT

INDOOR STORAGE IS RECOMMENDED IN WINTER.

10. WARRANTY

THANK YOU FOR CHOOSING SUNNYDAZE DECOR. IF YOU HAVE ANY QUESTIONS, COMMENTS OR CONCERNS PLEASE FEEL FREE TO CONTACT US BY PHONE AT: 888-881-4668, BY EMAIL: CUSTOMERSERVICE@SERENITYHEALTH.COM, OR YOU COULD ALSO EMAIL US VIA OUR CONTACT US PAGE AT: WWW.SERENITYHEALTH.COM/CONTACT-US/.

WE STAND BEHIND OUR BRAND AND THE QUALITY OF THE ITEMS WE SELL. WE WILL SEND NEW PARTS, OR REPLACE PRODUCTS AT OUR DISCRETION WITHIN THE ONE YEAR WARRANTY PERIOD. BEFORE WE CAN HELP YOU WILL NEED TO PROVIDE PROOF OF PURCHASE WITH THE DATE OF PURCHASE AND PHOTOS OF THE DEFECTIVE MERCHANDISE. WE WILL USE THE PHOTOS TO DETERMINE THE CAUSE OF DEFECT AND FOR FUTURE QUALITY CONTROL.

