
#### **CANOPY INSTALLATION INSTRUCTIONS**

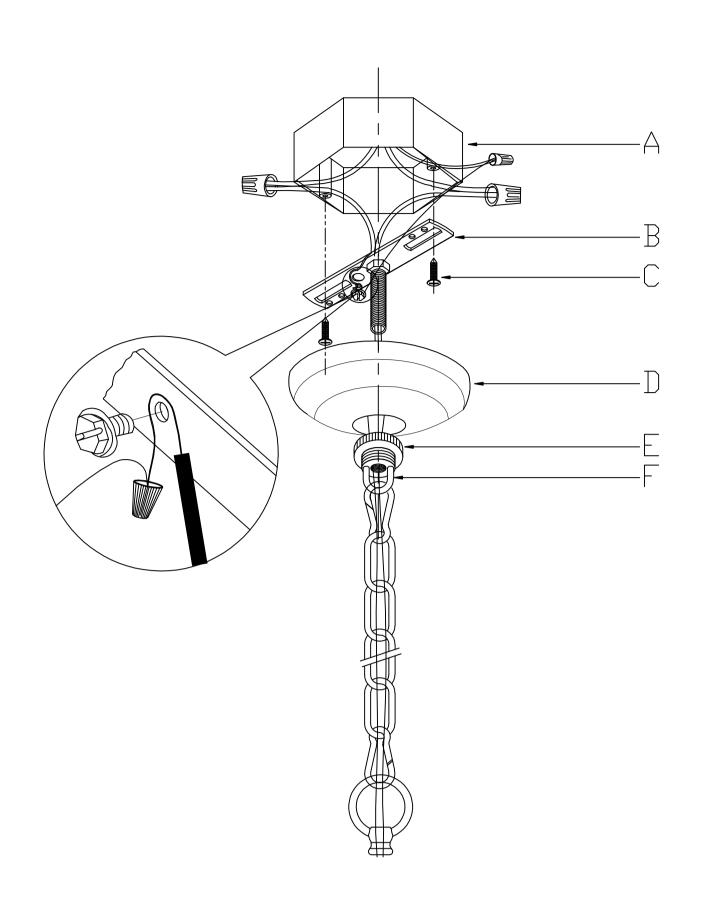

#### Attentions for lamp installation:


- 1. Please read the user manual carefully before the installation.
- 2. Please hire the professional electrician to install the lamp.
- 3. The load-bearing of the customer's ceiling must be over 3 times of the light weight.
- 4. The power must be cut off until the whole lamp is installed well.
- 5. To avoid getting an electric shock and cause the unnecessary hurt, please cut off the power when cleaning the lamp.
- A. Existing Electrical Box B. Crossbar


C. Crossbar Screws

D. Canopy

- E. Canopy Loop Nut lock F. Canopy Loop

#### **Light Bulb**





Buckle is used to connect the chain and loop or adjust the length of chain.


### E12

### USER MANUAL FOR MODEL# HG9033


Light Bulb:E12

light:E12\*5

(Rated 110-130V/60Hz, bulb 40W-60W maximum.)

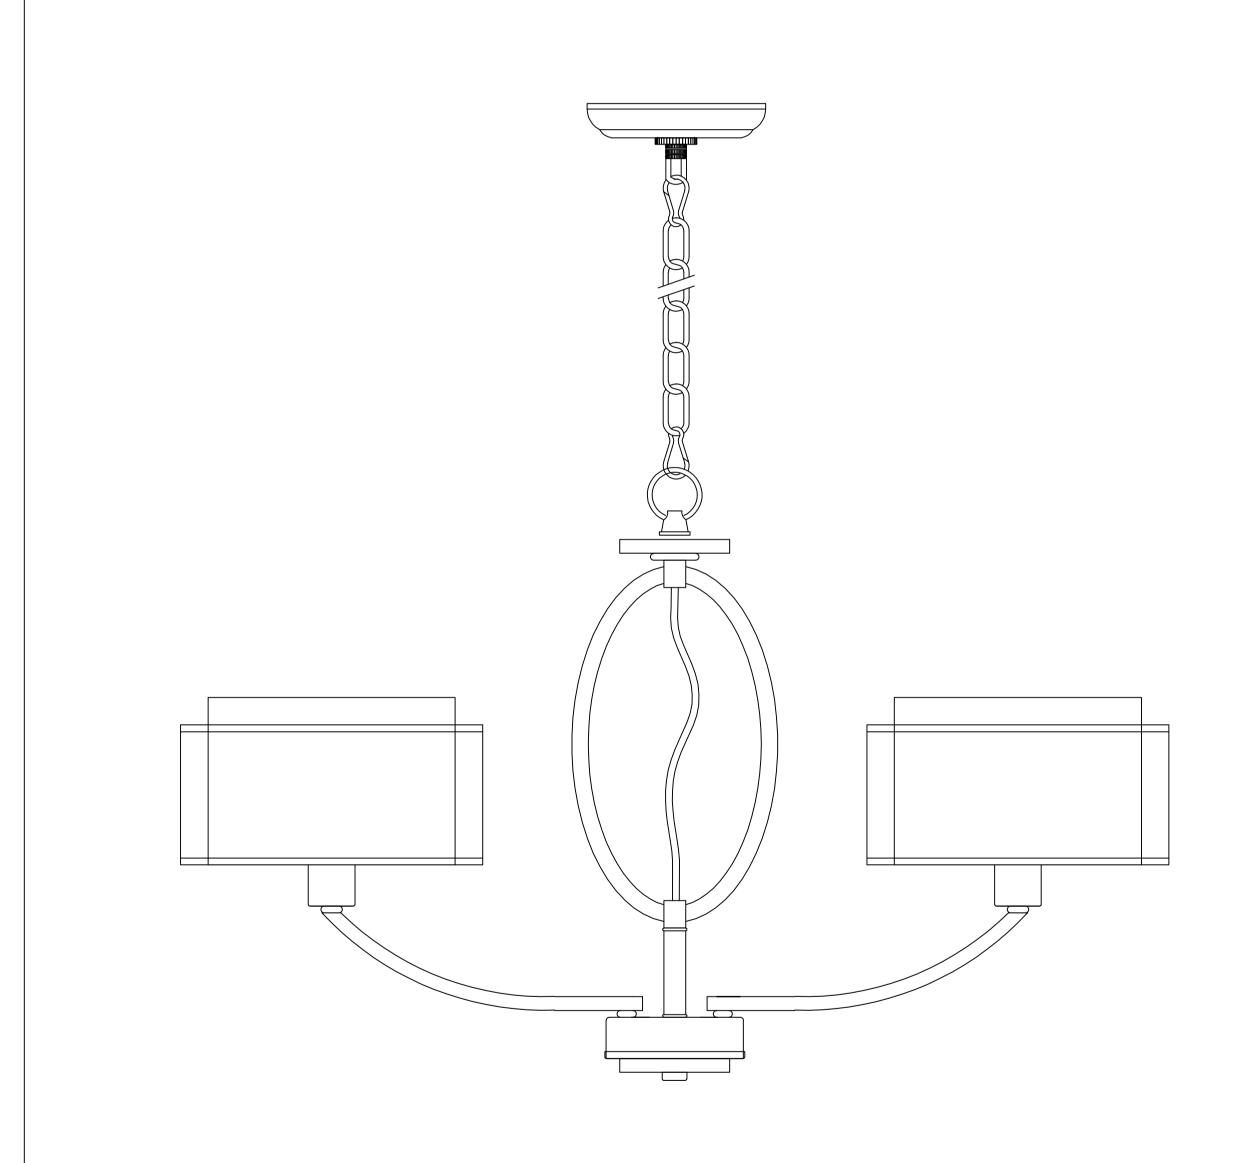


Please note: The parts in this table are completely unassembled, for illustrative purpose. In the actual product that you receive, some parts are assembled and attached together.

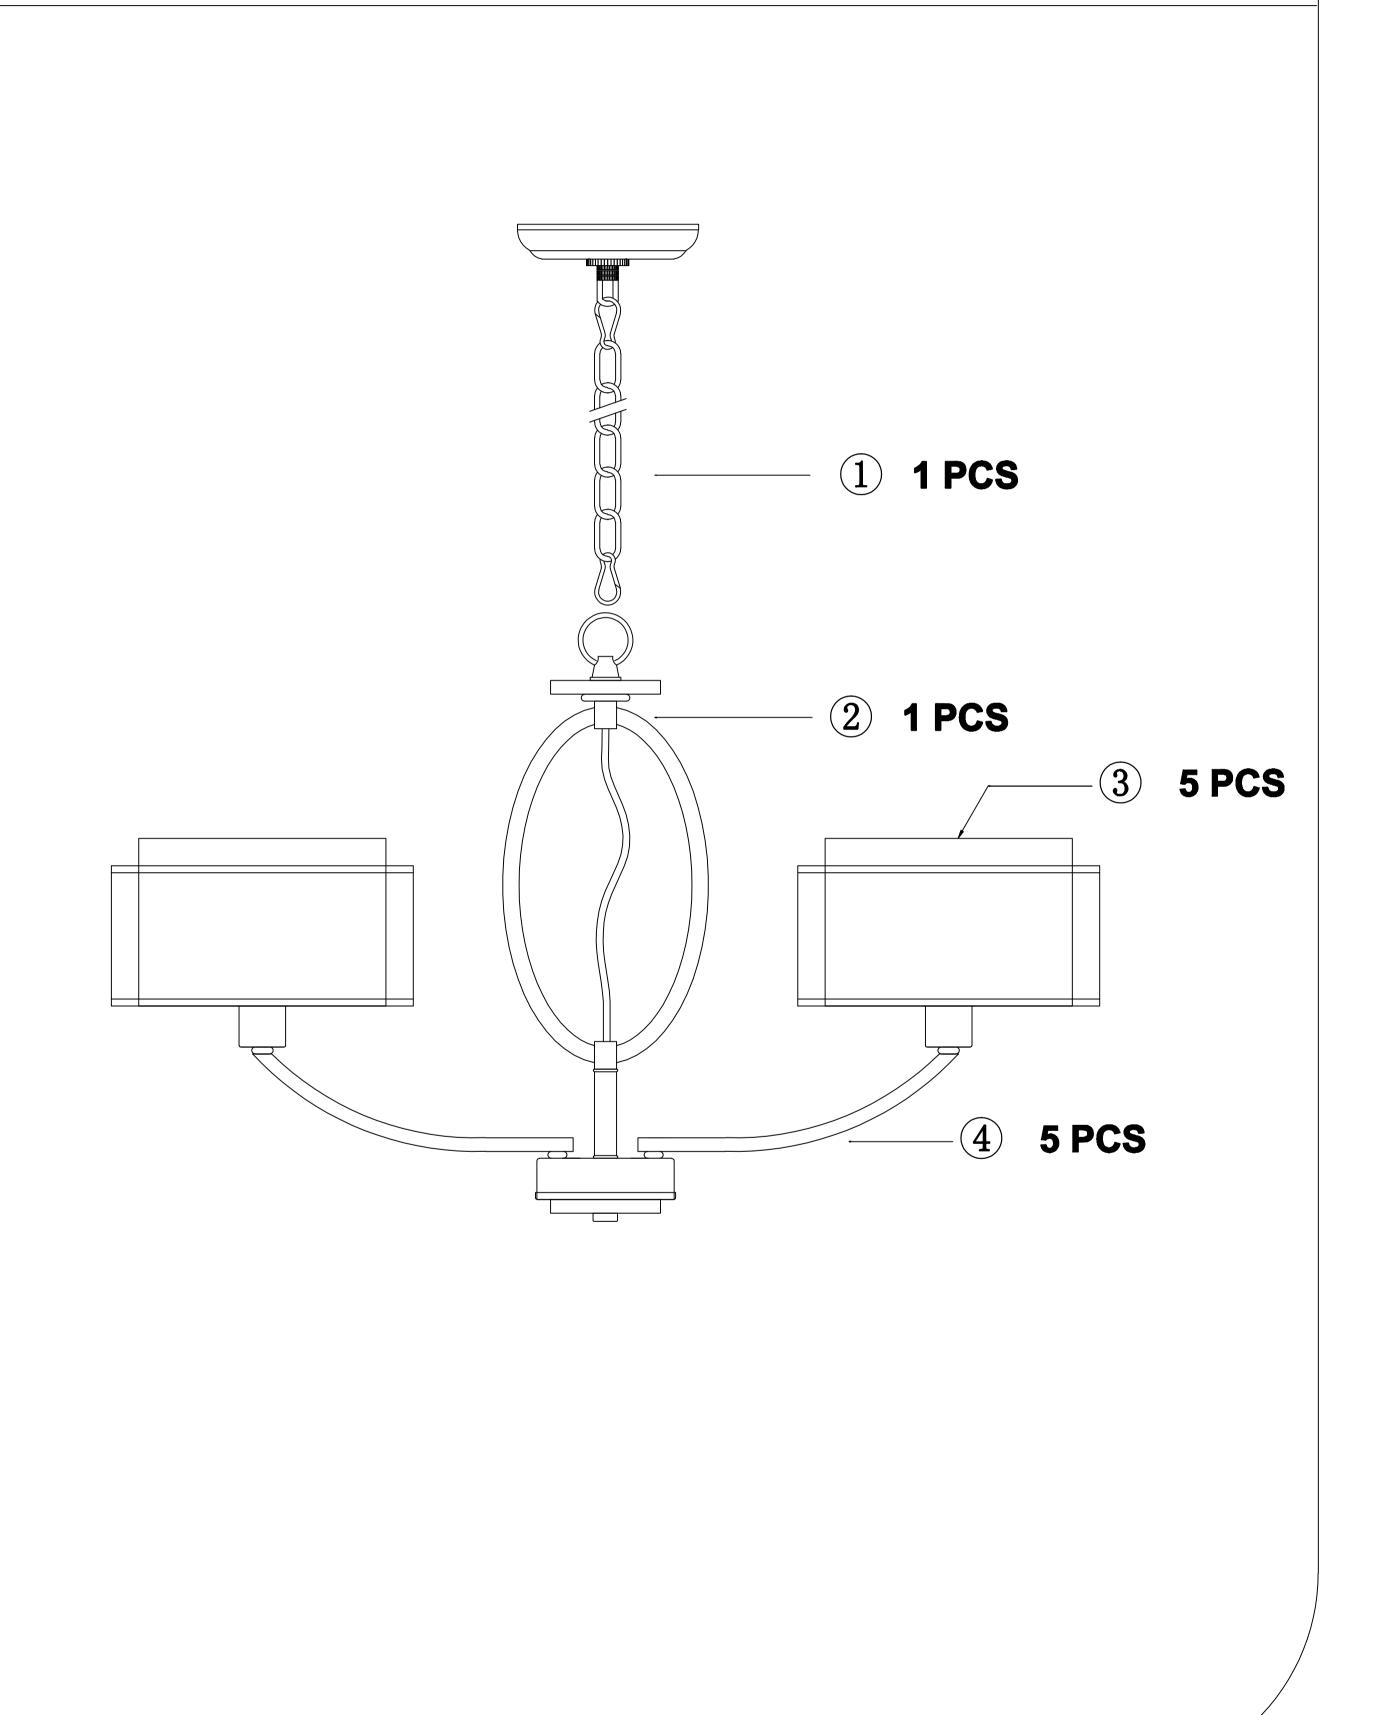

## Products list

NO.	Picture	Quantity
1		1 PCS
2		1 PCS
3		5 PCS
4		5 PCS

# **Assembly and Installation Steps**

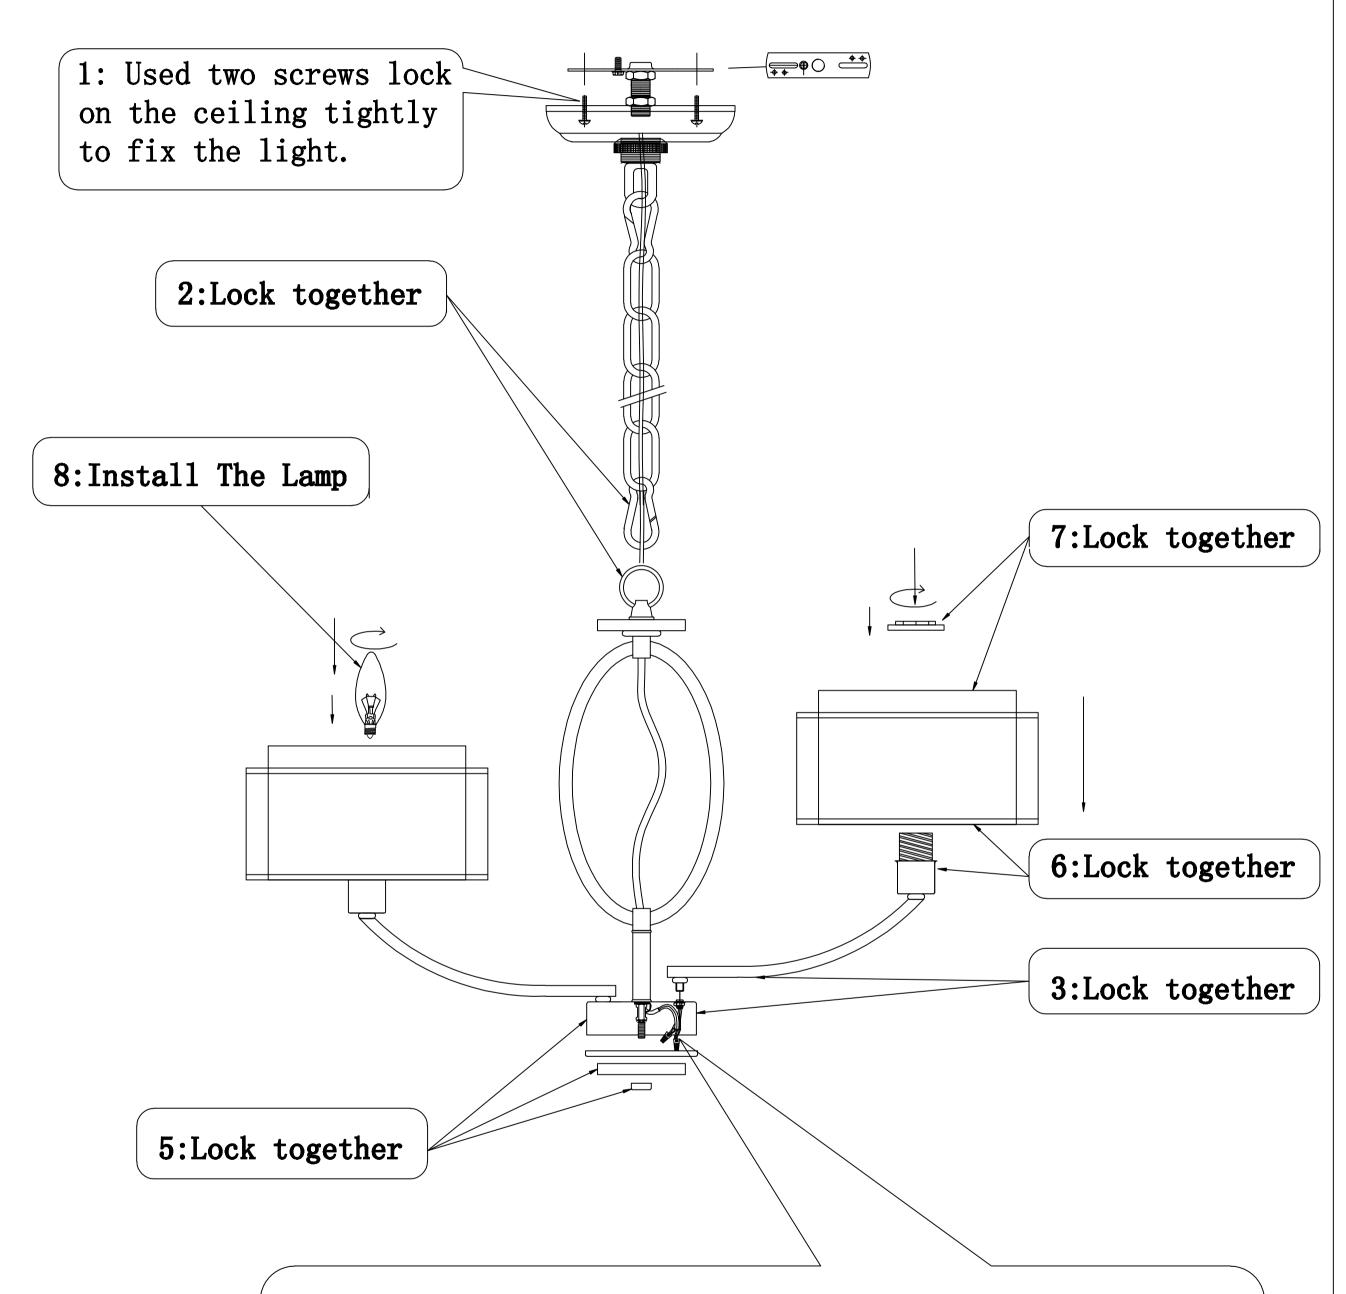

4:Connect all white wires (-) from the arm together, and connect all black wires (+) from the arm together. Do not mix the black and white wires. There are two same main wires, they are thicker than the black and white wires. Connect black wires of the arms together with one of the main wire. Connect white wires of the arms together with the other main wire. The wires connection is finished.

## **Product Size**

