

One-Light Pendant W/HAL AC LED Module

Ceiling cord mounted • Dry location listed



Description:

The simple design of this LED Dome pendant offers complements a wide array of styles from industrial to farmhouse. The 9w LED pendant is 3000K in an Antique Bronze finish with a painted gold interior.

Specifications:

- Antique Bronze (-20) (painted)
- Aluminum Construction
- Antique Bronze, painted gold inside aluminum shade, White acrylic Diffuser
- LED Module is replaceable (part # 93054049)
- Inspired to enhance modern home decor.
- Complements a wide array of styles from industrial to farmhouse.
- Antique Bronze finish with a painted gold interior.
- Dimmable to 10% with many ELV dimmers
- 623 lumens 69.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 10 feet of wire supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	9w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	623/69.2 (LM-82)
Lumens/LPW (Delivered)	388/51.7 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Dry location listed ENERGY STAR® qualified

P5340-2030K9

Images:



Dimensions:

Diameter: 10"
Height: 5-5/8"
Overall Ht. W/Cord: 125-1/2"

Glass
Width: 10"
Length: 10"
Glass 2
Width: 2-7/8"
Length: 2-7/8"
Height: 0-13/16"

Photometrics:

P5340-2030K9

ELECTRICAL DATA	P5340-2030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.075 A
Input Power	9
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P5340-2030K9


LED Light Engine: 3000 K 90+
 System Wattage: 9
 Fixture delivered lumens: 388
 Fixture Efficacy: 51.7
 Spacing Criteria: 1.3

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	173	
5	174	17
15	170	48
25	156	72
35	138	86
45	116	89
55	72	62
65	6	10
75	3	3
85	1	1
90	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	136	35.0
0-40	222	57.3
0-60	374	96.3
0-90	388	100.0
90-180	0	0.0
0-180	388	100.0

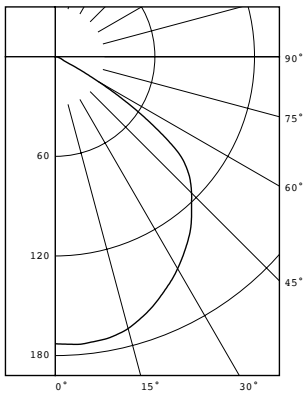

P5340-2030K9

Dimming Notes:

P5340 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vierti VTELV-600

Lutron Ariadni AYCL-153P

Lutron Diva DVCL-153P

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.