


ITEM # : W44CS Assembly Instructions

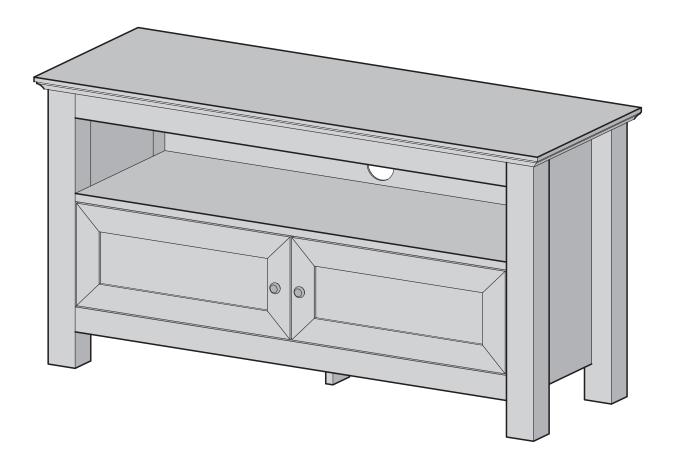


Please visit our website for the most current instructions, assembly tips, report damage, or request parts. www.walkeredison.com

Revised 03/2017

General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are : wood dowels , screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together , place a small amount of glue on the end of the dowel before attaching parts together . Wipe away excess glue immediately.




VI. A Phillips head screwdriver is required for the assembly of this product.



VII. Power tools should not be used to assemble this product.




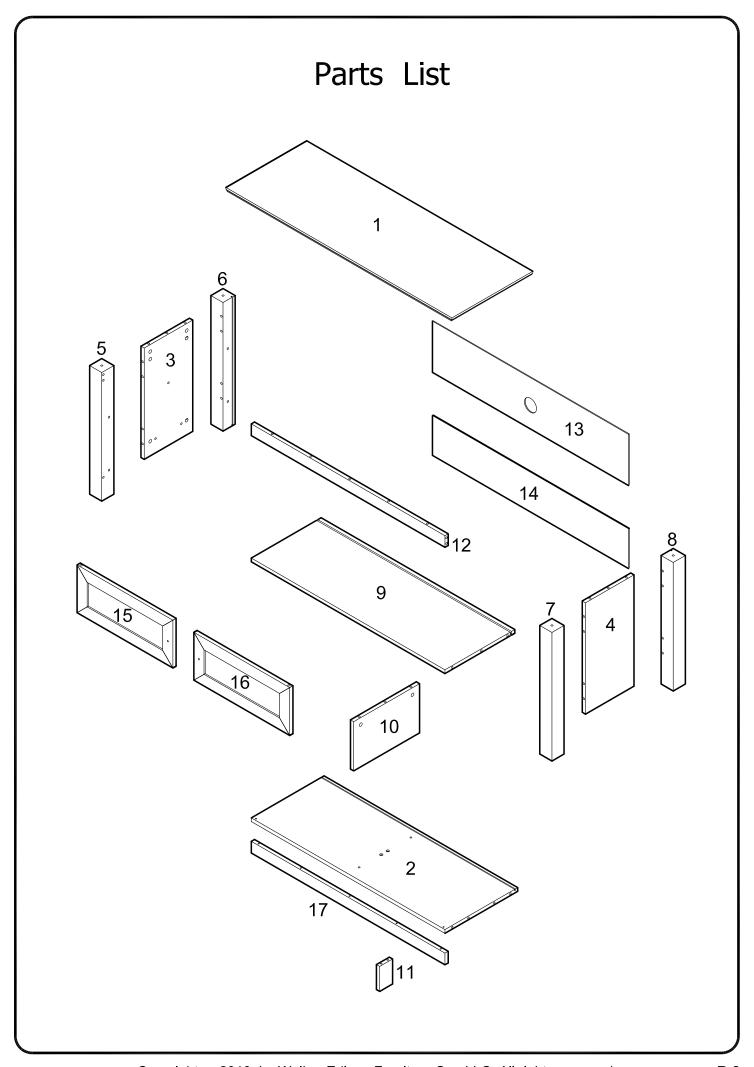

Hardware List

Α		Ø8x30	Wooden dowel	28	pcs
В		Ø6x35	Cam bolt	29	pcs
С		Ø15x12	Cam lock	29	pcs
D			Door stopper	2	pcs
E	<i>€</i>	Ø3x15	Screw	4	pcs
F		Ø6x50	Screw	4	pcs
G		Ø5x8D13	Screw	2	pcs
Н	(Co	Ø24x21	Handle	2	pcs
I	ammma(E)	Ø4x22	Screw	2	pcs
J		40x15.5x15mm	Door Hinge	2	pcs
K		40x15.5x15mm	Door Hinge	2	pcs
М	<(?)	Ø3x12mm	Screw	8	pcs
N		Ø9.5x12mm	Plastic pivot	4	pcs
Р			Plastic wedges	8	pcs
Q	<	Ø3x17	Screw	8	pcs
R		Ø4	Wrench	1	рс
S			Glue tube	3	pcs
Т		Ø30	Sticker	29	pcs


The hardware quantities listed above are required for proper assembly. Some extra hardware may also have been included.

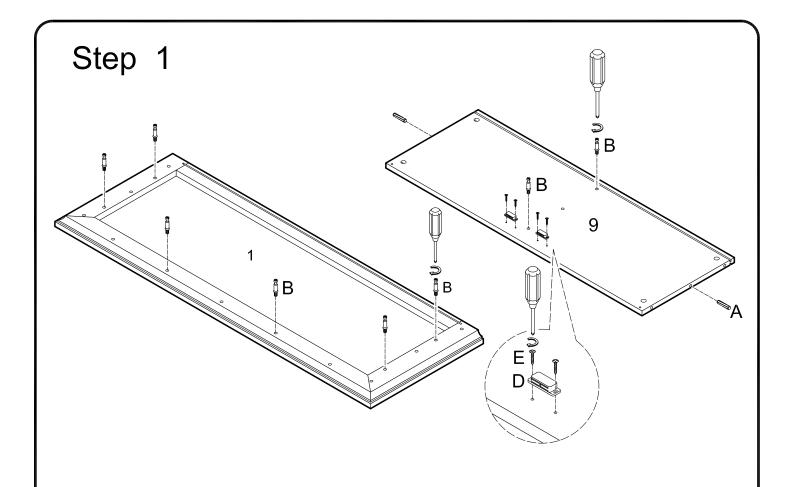


Screw cam bolts (B) into top panel (1) and shelf (9). Insert dowels (A) into shelf (9).

Attach door stoppers (D) to shelf (9) using small screws (E).


Step 2

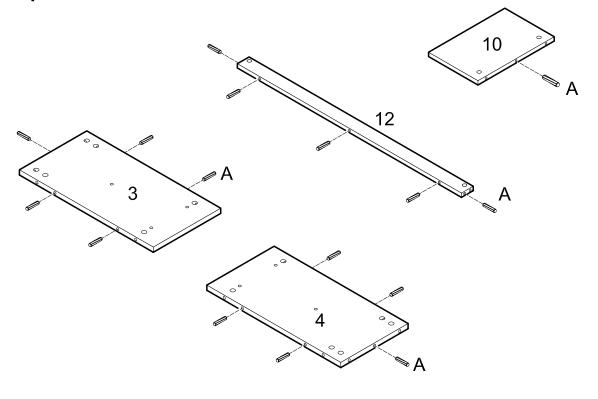


Insert dowels (A) into panels (3,4,10) and slat (12).

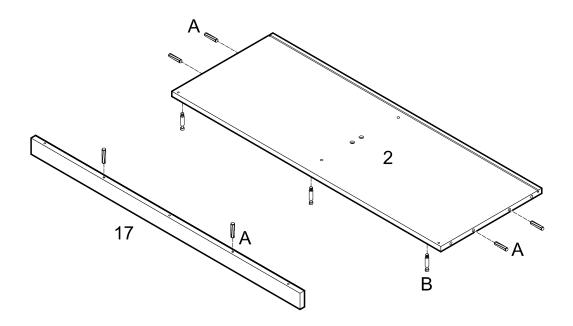

Screw cam bolts (B) into panel (2). Insert dowels (A) into panel (2) and slat (17).

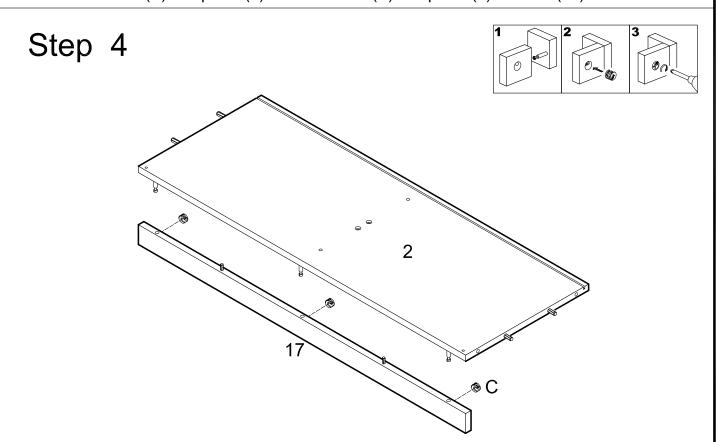


Attach slat (17) to panel (2) using cam bolts and dowels as guides. Insert cam locks (C) into slat (17) and tighten with a screwdriver.

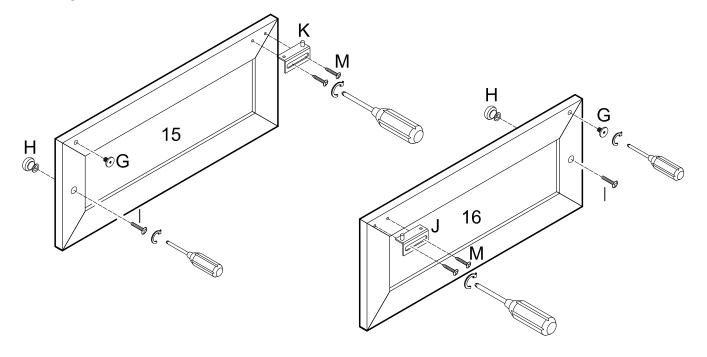


Attach handles (H) to doors (15,16) using medium bolts (I). Screw short bolts (G) into doors (15,16). Attach door hinge (K) to door (15) using small screws (M). Attach door hinge (J) to door (16) using small screws (M).


Step 6

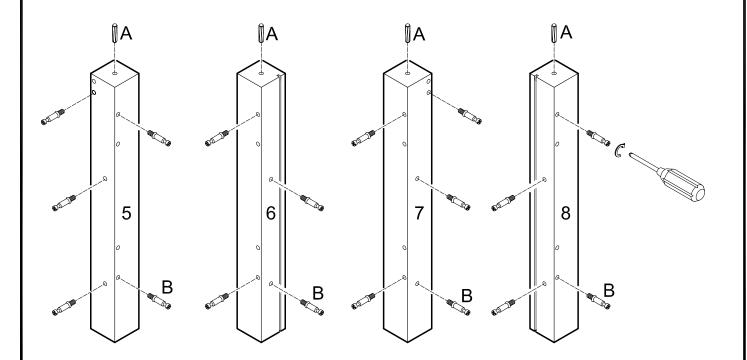


Screw cam bolts (B) into legs (5,6,7,8). Insert dowels (A) into legs (5,6,7,8).

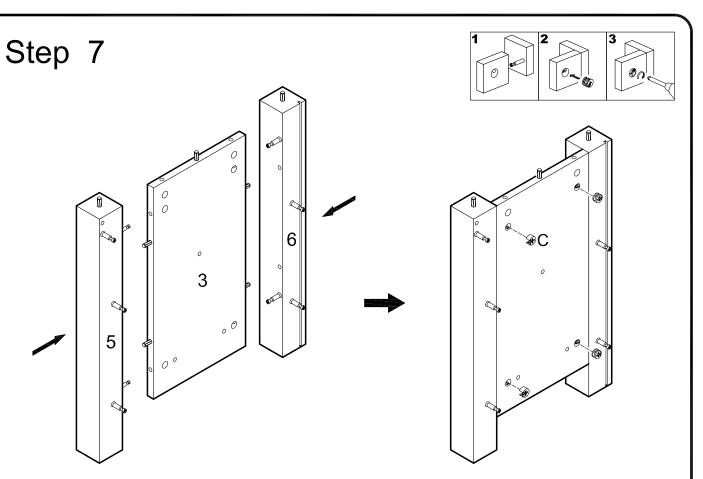


Attach legs (5,6) to panel (3) using cam bolts and dowels as guides. Insert cam locks (C) into panel (3) and tighten with a screwdriver.

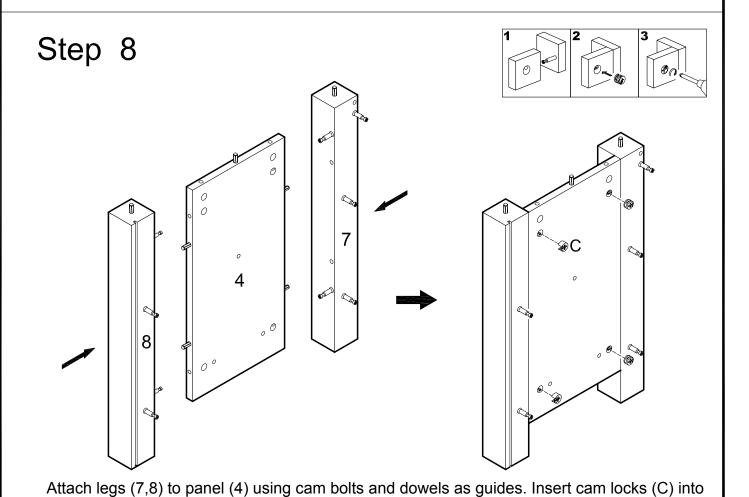


panel (4) and tighten with a screwdriver.

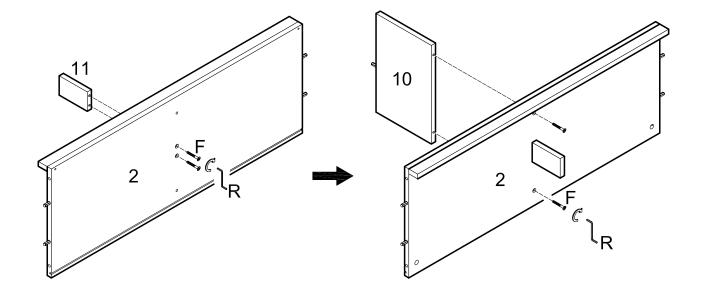


Attach support leg (11) to panel (2) using long bolts (F). Tighten long bolts (F) with wrench (R). Attach panel (10) to panel (2) using bolts (F). Tighten long bolts (F) with wrench (R).

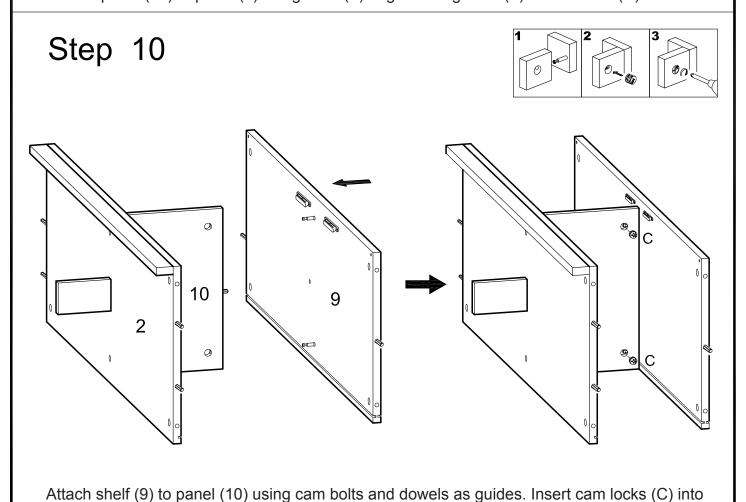


panel (10) and tighten with a screwdriver.

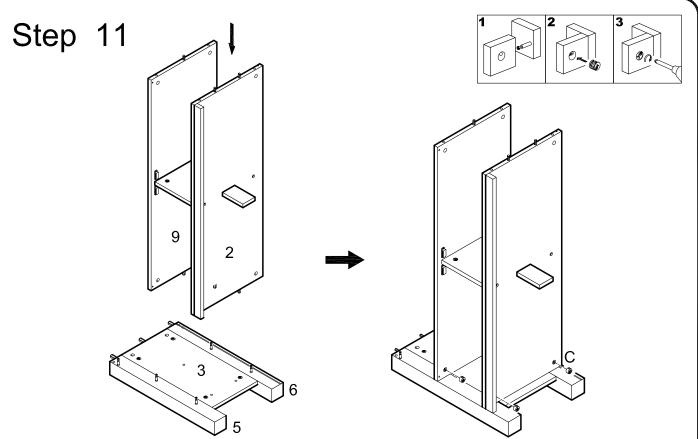

Attach the assembly from the previous step to the panel (3) assembly using cam bolts and dowels as guides. Insert cam locks (C) into panel (2) and shelf (9) and tighten with a screwdriver. Two cam locks will be inserted into panel (2) and into the shelf (9).

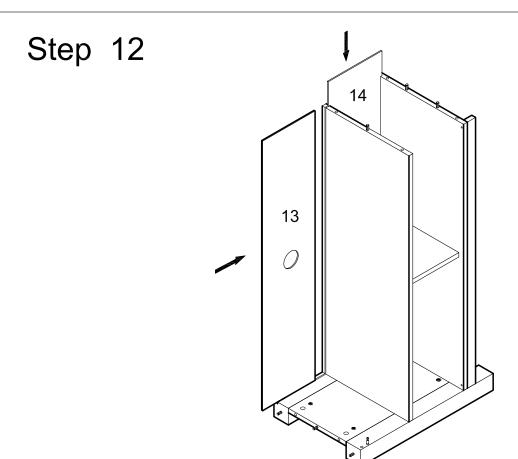



Carefully slide back panels (13,14) into place along the grooves at the back of the frame assembly.

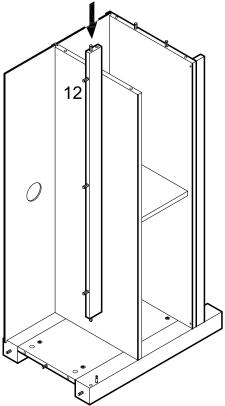

Attach slat (12) to the frame assembly using cam bolt and dowel as guides. Insert cam lock (C) into slat (12) and tighten with a screwdriver.


Step 14

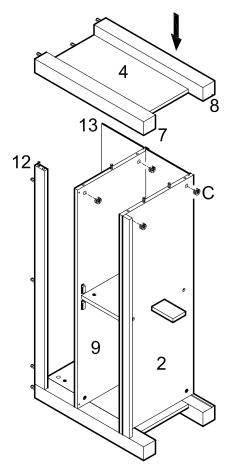





Insert cam locks (C) into panel (2), shelf (9) and slat (12). Attach the panel (4) assembly to panel (2), shelf (9) and slat (12) using cam bolts and dowels as guides. Tighten cam locks (C) with a screwdriver.




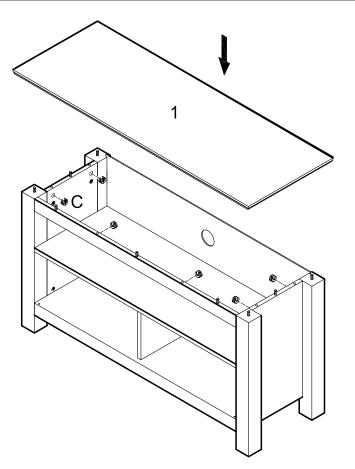




Insert cam locks (C) into the frame assembly. Attach top panel (1) to the frame assembly using cam bolts and dowels as guides. Tighten cam locks (C) with a screwdriver.

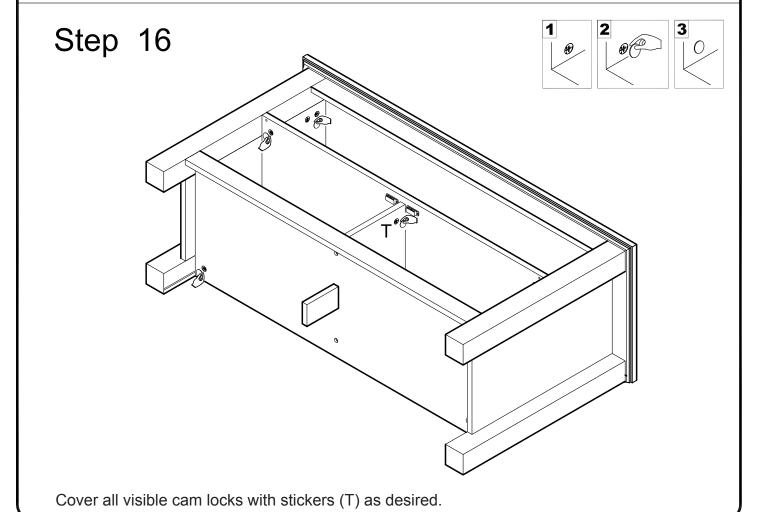


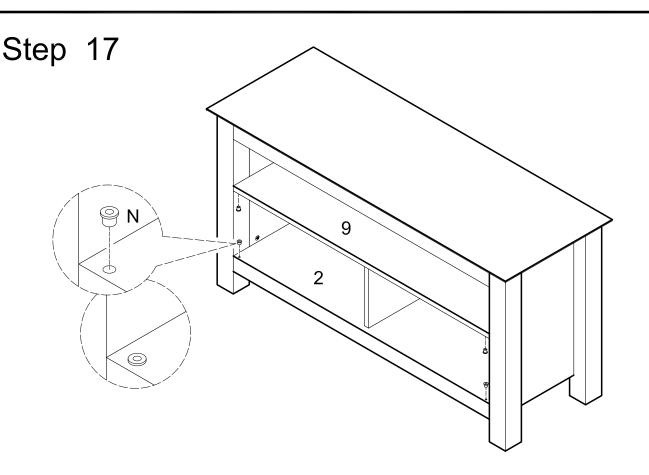

Insert plastic pivots (N) into panel (2).

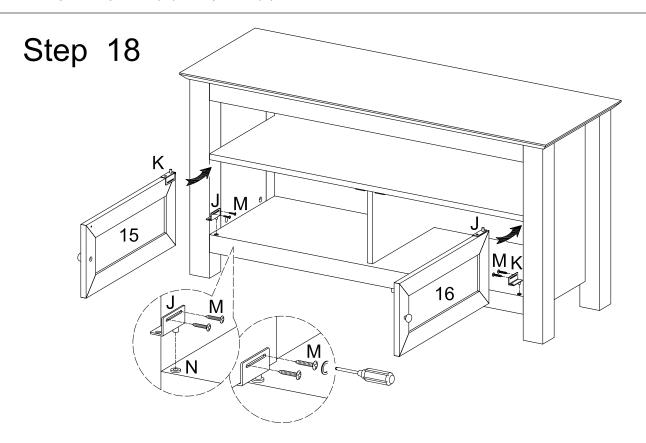

Insert door hinge (J) into left bottom plastic pivot (M). Slide door (15) into place. Attach door hinge (J) to door (15) using small screws (M). Insert door hinge (K) into right bottom plastic pivot (N). Slide door (16) into place. Attach door hinge (K) to door (16) using small screws (M).

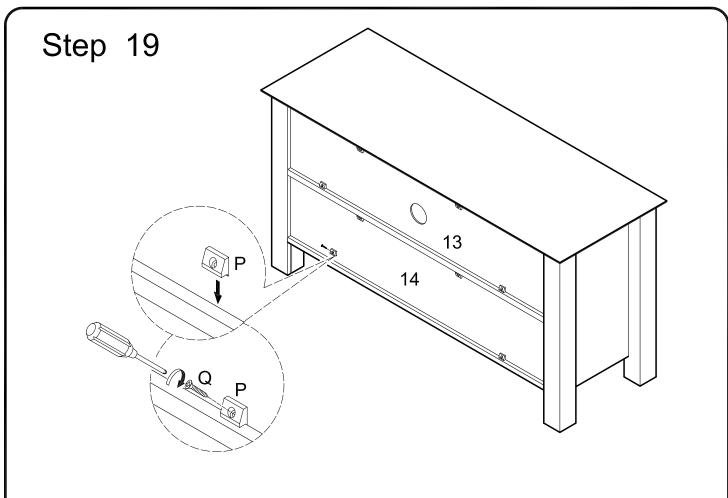

Secure back panels (13,14) using plastic wedges (P) and large screws (Q).

