


INSTALLATION

GALAXY-W7MRL2028/2432/2836/4032

LED BATHROOM MIRROR Lighting and Defogger**IMPORTANT SAFETY INSTRUCTIONS**

When using an electrical furnishing, basic precautions should always be followed, Requires two(2) person in installation.

**DANGER**

**READ AND FOLLOW ALL INSTRUCTIONS
BEFORE USING THIS MIRROR.**

**WARNING**

To reduce the risk of burns, fire, electric shock or injury to persons. Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer. Never drop or insert any object into any opening. Do not use outdoors.

**WARNING**

Risk of electric shock. Connect this furnishing to a properly grounded circuit only. See Grounding instructions.

GROUNDING INSTRUCTIONS:**WARNING**


This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.

An Electrical option cabinet must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code.

NOTE: To ensure the normal use of product, it is required to set out wires as per the regulations of IEE. The product is only applicable to the indoor installation. The installation must be executed by a professional electrician, wrong installation may lead to product damage and personal injury.

PLEASE SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

INSTALLATION




GALAXY-W7MRL2028/2432/2836/4032

LED BATHROOM MIRROR

Lighting and Defogger


TOOLS REQUIRED FOR ASSEMBLY



Electrical Drill



1/8" Drill Bit




Pencil



Phillips
Screwdriver




Tape Measure




Level

PARTS INCLUDED




20"*28"

W7MCL2028




24"*32"

W7MCL2432



28"*36"

W7MCL2836




40"*32"


W7MCL4032

DESCRIPTION	QUANTITY
LED Bathroom Mirror	1


HARDWARE INCLUDED (not shown actual size)



SCREW



DRYWALL ANCHOR



WIRE CONNECTOR




NOTE: Determine overall mirror dimensions before proceeding to installation.

*All dimensions & specifications are approximate and subject to change without notice.

*Accessories and parts may vary from the picture above. Depends on the product model and size.

INSTALLATION



GALAXY-W7MRL2028/2432/2836/4032

LED BATHROOM MIRROR

Lighting and Defogger

ELECTRIC CONNECTIONS

ALL WIRING SHOULD BE DONE BY A QUALIFIED LICENCED ELECTRICIAN



WARNING: Shut off power before wiring the mirror.



WARNING: An Electrical option mirror must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code.




WARNING: This mirror must be connected to a grounded, metal permanent wiring system or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment grounding terminal or lead on the mirror.




CAUTION: Requires 120 VAC 20 Amp GFI protected circuit.

vertical hanging

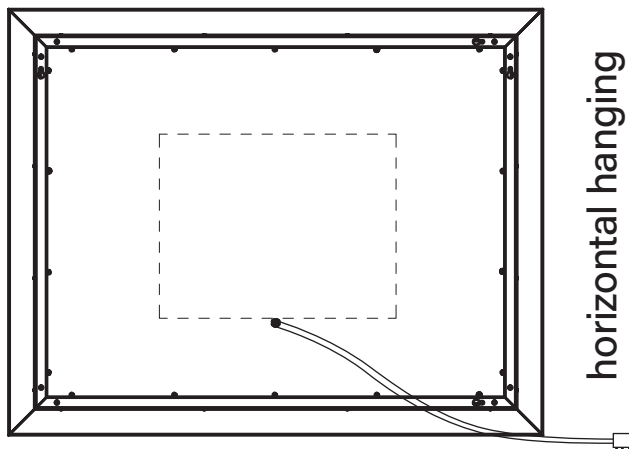

Electric wiring: Be sure to provide enough wire to make the proper and safe connection to the Field/Power.

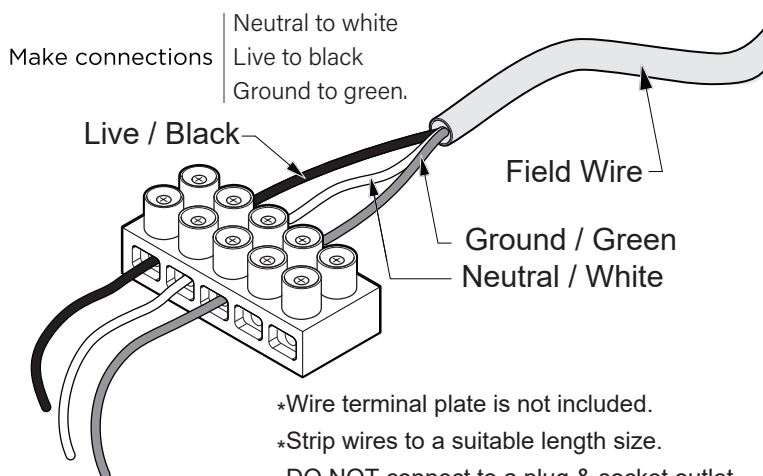

MIRROR FEATURES


- 4mm copper free silver mirror
- High output LED lighting:
CRI 90+, 6000K \pm 500 CCT, IP44
- Dimmable touch switch
- Vertical and horizontal mount options
- Defogger is separate controlled

INSTALLATION INSTRUCTIONS

1

PLACEMENT


Choose to mount the mirror in either a vertical or horizontal orientation. Once the orientation is chosen, measure the distance between the center of the keyholes in the mounting bracket.

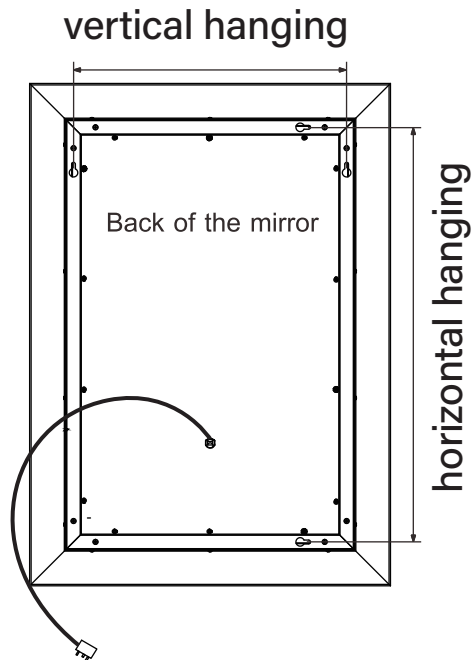

2

SUPPORT LOCATION


After measuring the distance between the keyholes on the mirror, mark the mounting points on the wall in the appropriate spots. These marks should be the same distance apart as measured in step 1. Use a level to ensure the mounting points are straight.

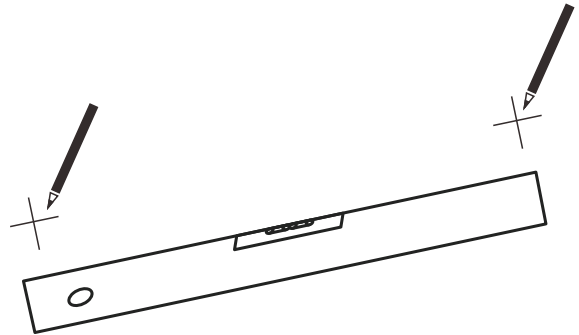

3

INSTALL SCREWS

Using a drill, make holes on solid wall, and tighten mounting screws into the drywall anchors, leaving 3/8 in. space between the screw head and the wall.

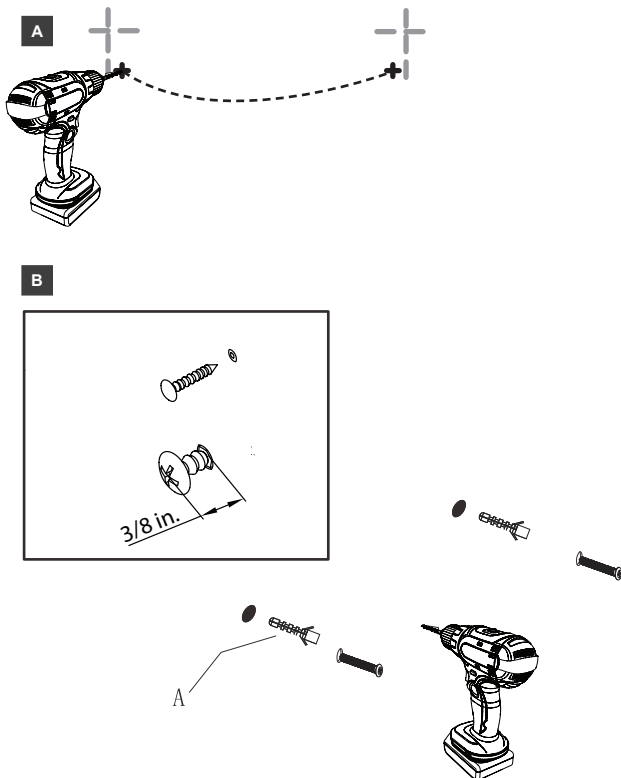


4

POWER OFF

Please turn off all the power before the mirror wires connection.

Power Off

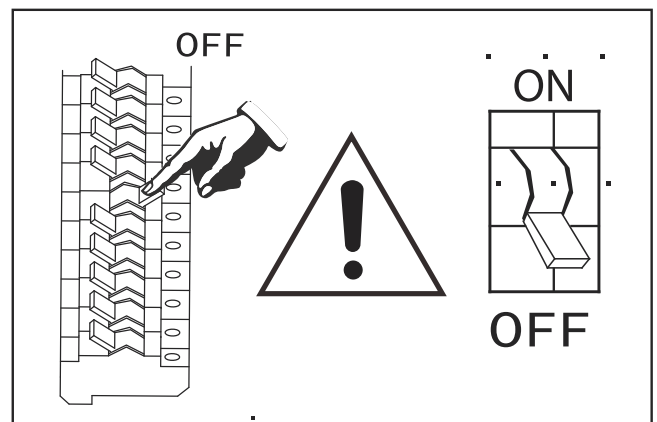


INSTALLATION INSTRUCTIONS

5

CONNECTION

Use the wire connector connect to external power supply, and pusing the power supply wires into the junction box.

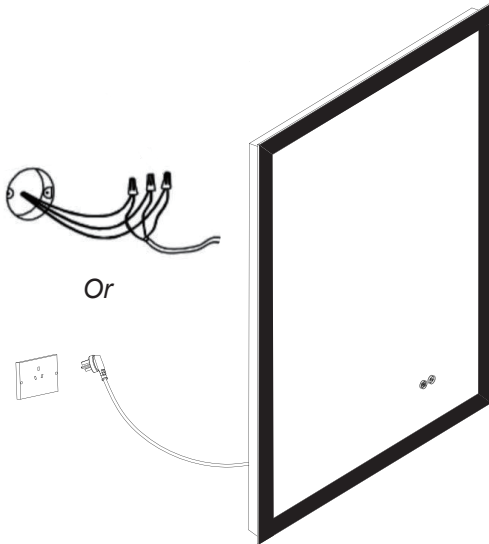


Warning: when use plug connection, please mind the space gap between wall and mirror frame

6

Turn on the power


Insert the screw heads into the keyholes on the mirror's mounting bracket, then carefully let the mirror drop down so the screw heads slide into the narrow ends of the keyholes, securing the mirror in place. Then turn on the power at the circuit breaker or reinsert the fuse.

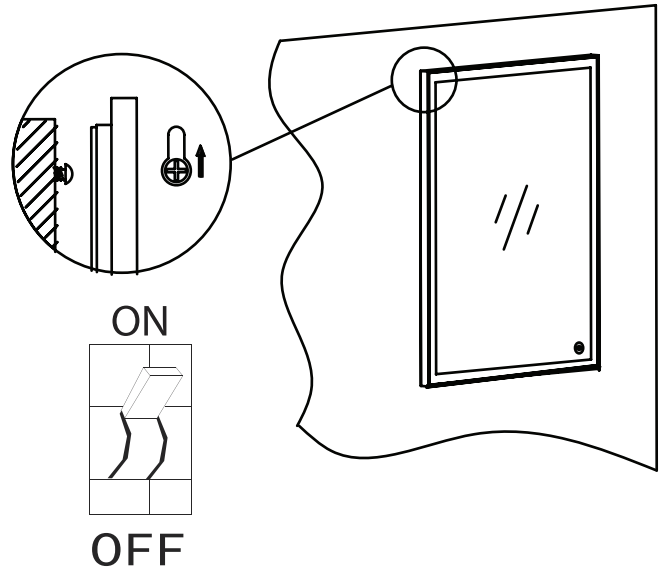


FINAL ASSEMBLY


How to use Defogger Switch and Dimmer Switch:

Left Touch Sensor

 ON/OFF Anti-foggy(The power will automatically go off in an hour)

Right Touch Sensor

 ON/OFF Lighting
Brightness control by holding



"Switch" sign

OPERATION

- 1.Touch the sensor button to turn ON the light.
- 2.Touch and hold the sensor button to dim the light.Release the button when the light reaches the desired brightness setting.
- 3.Touch the sensor button to turn OFF the light.

***Suggestion:** Turn off the mirror power supply if you don't use it for a long time.

WARNINGS:


1. Please do not use if you found the mirror have been broken.
2. Never put any sharp or heavy material on the mirror surface, other wise the glass mirror will be broken and body injury accidents may occur .
3. Turn off the power switch in storm lightning weather to avoid electric parts damage.

Use and Maintenance:

CAUTION:

● USE


1

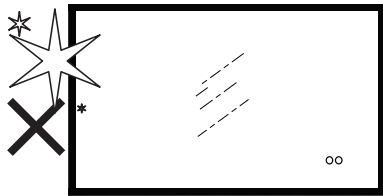

1. To avoid damage, do NOT knock the mirror with any hard objects;

● CLEANING


2

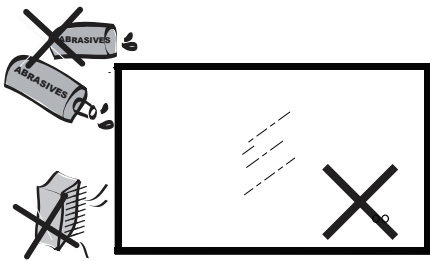

2. Do NOT clean the mirror with caustic cleaner. Do NOT wipe the mirror with Bristle brush;

● MAINTENANCE

3

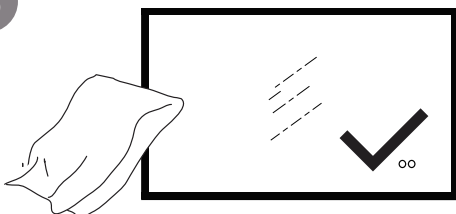

3. For daily maintenance, please use soft cloth and mild cleaner to clean the mirror.

LIMITED WARRANTY**LIMITED WARRANTY TWO YEARS TERM:**

WELLFOR warrants to the original purchaser that, it will, at its election repair, replace, or make appropriate adjustment to products made by this company shown to have significant defects in material or workmanship which are reported to WELLFOR in writing within two (2) years from the date of delivery. WELLFOR is not responsible for installation costs. The warranty is void in the event the product is damaged in transit, or if damage or failure is caused by abuse, misuse, abnormal usage, faulty installation, damage in an accident, improper maintenance, or any repairs other than those authorized by WELLFOR. At the expiration of the two years warranty period, WELLFOR shall be under no further obligation under any warranty, expressed or implied, including the implied warranty of merchantability. WELLFOR shall not be liable for any consequential damages arising out of or in connection with the use or performance of its products. Some states do not allow limitations on how long an implied warranty lasts or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any liability against WELLFOR under any implied warranty, including the warranty of merchantability, is expressly limited to the terms of this warranty. Permission to return any merchandise under this warranty must be authorized by WELLFOR and returned prepaid by the purchaser. Claims under this warranty should be sent directly to your dealer.

For customer support please call 206.809.0093 weekdays 9:00 to 6:00 PST, or by email: service@wellfor.com.

For more information: www.wellfor.com