



# Vault™

## Under-Mount Apron-Front Kitchen Sink

### K-3936

#### Features

- 30-inch minimum base cabinet width.
- Single bowl.
- 9-inch depth.
- Short apron allows sink to be used in most standard cabinetry or retrofitted to existing standard cabinetry.
- Self-Trimming apron overlaps the cabinet face for easy installation.
- No faucet holes.
- Rear drain increases workspace in the sink and storage space underneath.
- Includes installation hardware and bottom sink rack.
- SilentShield® sound-absorption technology offers quieter performance.

#### Material

- Handcrafted from 18-gauge stainless steel.

#### Installation

- Under-mount apron-front.

#### Recommended Products/Accessories

K-6377 Sponge Caddy  
K-6378 Kitchen Brush Caddy  
K-8801 Sink Strainer  
K-8799 Sink Strainer  
K-6379 Kitchen Squeegee

#### Included Components

Product consists of:

91915 Hardware Kit





#### Codes/Standards


ASME A112.19.3/CSA B45.4

#### Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks

See website for detailed warranty information.

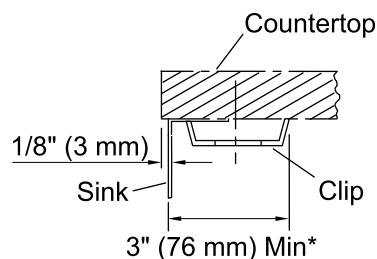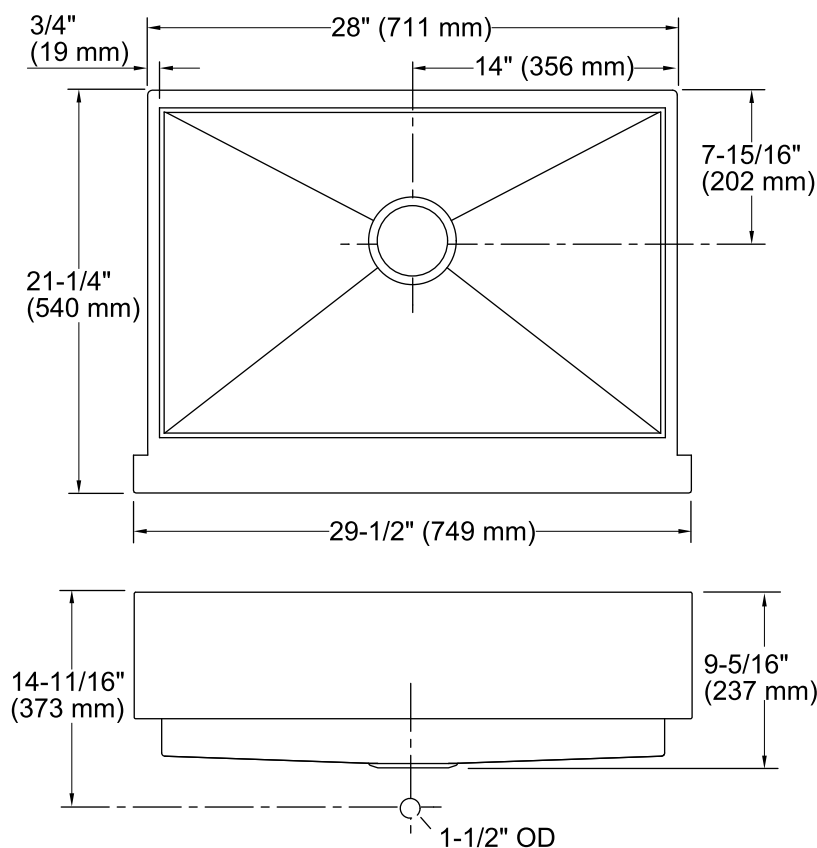

\*Allow clearance around the back sink rim for clip attachment.

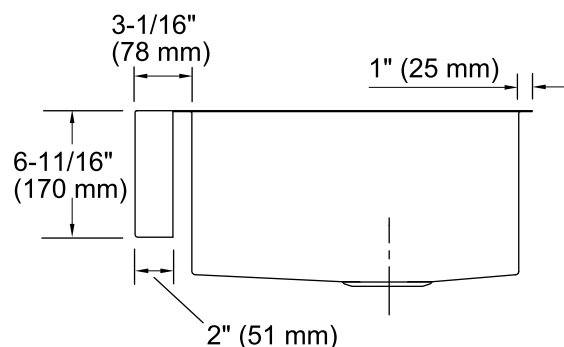

### Technical Information

All product dimensions are nominal.

Bowl configuration: Single

Installation: Top-mount, Under-mount

Min. base cabinet width: 30" (762 mm)

Bowl area (Only): Length: 26-1/2" (673 mm)  
Width: 17-3/16" (437 mm)  
Bowl depth: 9" (229 mm)

Drain hole: 3-11/16" (94 mm)

Template: 1166718-7, required, included

### Notes

Install this product according to the installation instructions.

Allow a minimum of 3" (76 mm) clearance for the back 1" (25 mm) sink rim flange for clip attachment.

The 3/4" (19 mm) side rim flanges are supported without using the clip attachment. See the installation guide for further instructions.