

## **ASSEMBLING & INSTALLATION INSTRUCTIONS**

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.


51031

- WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
- ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.

## ASSEMBLING THE FIXTURE (Fig.1)

- 1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
- 2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
- 3. Thread the two mounting screw into the pre-drilled holes in the Mounting plate spaced the same distance apart as the holes in the canopy (A).
- 4. Attach the Mounting plate to the Junction Box with the two Junction Box Screws as shown. The side of the Mounting plate marked "GND" must face out. **The junction box is not included.**
- 5. By measuring, determine correct wires length of needed for proper hanging height, then lock it securely with small screw(B). NOTE: slide wire clip to the proper position, then you may properly cut the wire is too long parts.
- 6. While holding the lamp body towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting plate with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box. Put canopy (A) on to the junction box, aligning screws on mounting plate with mounting holes in canopy and lock it securely with ball nut (C).
- 7. Install the light bulbs in accordance with the fixture's specifications. NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!!
- 8. Raise the end grapnel of the crystal cluster(E) hooked the bottom ring of the shade(D).

Your installation is now complete Return power to the junction box and test the fixture.

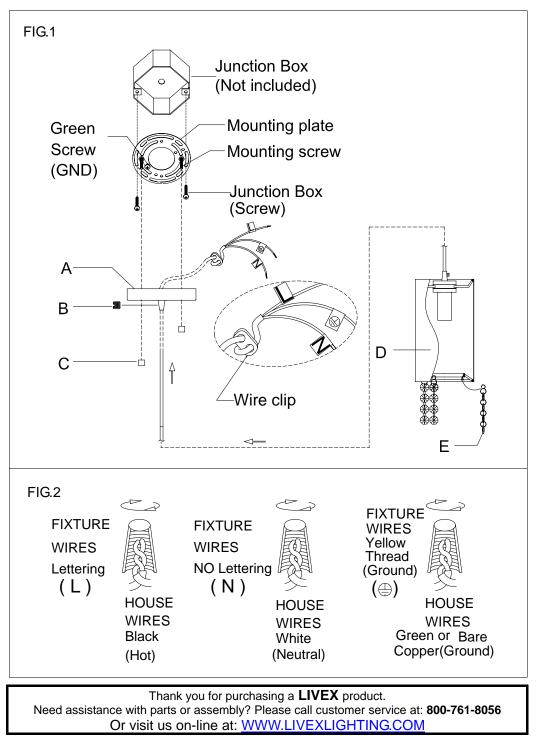

©COYRIGHT ALL RIGHTS RESERVED.LIVEX LIGHTING, INC.