



MOTINI
H O M E D E C O R

INSTALLATION INSTRUCTIONS

Item#LPI-542013

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
2. Carefully unpack the new fixture and lay all the parts on a clear surface.
3. Determine the desired hanging height and thread rods (H & J) to the fixture body (K).
4. Feed fixture wires through center tube (H & J). Connecting center part (H & J) to the fixture body (K) and turn clockwise until firmly tightened. Then connecting swivel (G) to the tube (H) and turn clockwise until firmly tightened, then secure with the hex nut (D).
5. Place the glass shades (M) over the sockets (L), then secure with socket ring (N).
6. Secure mounting screw (A) into universal mounting plate (B).
7. Attach the universal mounting plate (B) to the junction box using screws (C). The side of the crossbar marked "GND" must face out.

CONNECTING THE WIRES (Fig.2)

1. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.
2. Repeat same process with white junction box wire and ribbed wire leg of fixture wire. NOTE: Twist wires together in the same direction you twist the wire connector onto wires.
3. If your junction box has a grounding wire (green or bare copper), attach this wire and the bare copper wire from the fixture together as step 1. If junction box has no ground wire, attach the bare copper fixture wire to the green ground screw on the mounting plate.
4. Tuck these wire connections neatly into the ceiling junction box and then raise canopy (E) allowing for mounting screw (A) to protrude through the holes on canopy (H), and secure with ball nut (F).
5. Install light bulbs (O) into the socket (L). (Bulbs not included, Please do not exceed the maximum capacity recommended on the socket.)

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1


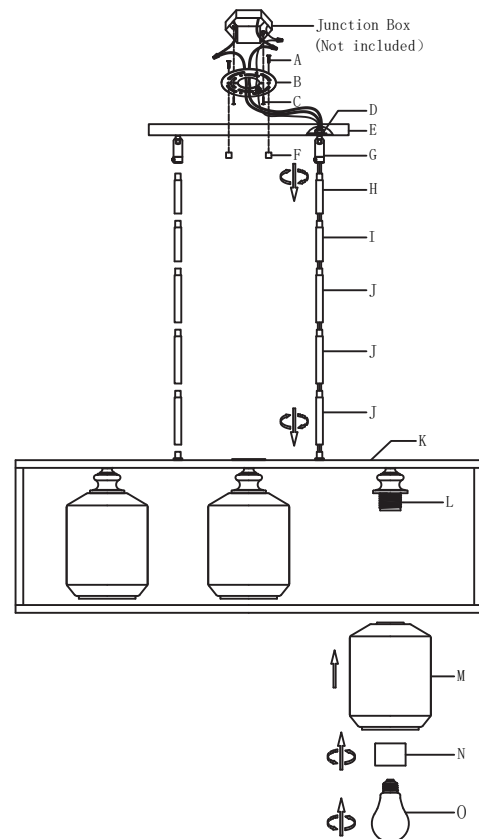


Fig.2

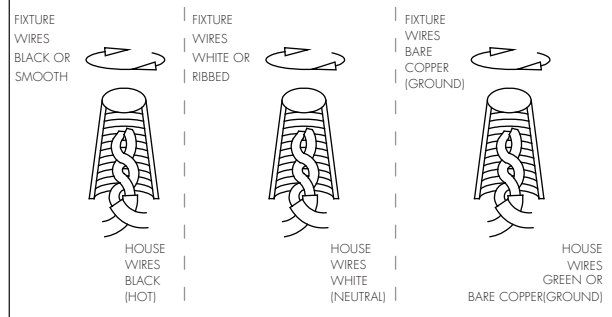

UL
c @ L US
LISTED