



TASK lighting

Sempria® LED SG9 Series


Linear under cabinet LED lighting with integrated WireWay system for concealed wire management

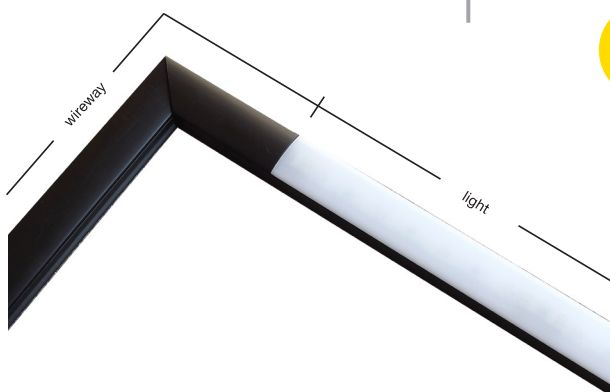

Fixture Section



WireWay Section

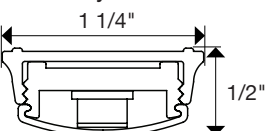


1/2
watt

SEMPRIA® SG9 SERIES

PART NUMBER	DIMENSIONS	TOTAL WATTS	LUMENS Based on 3000K (approx. per fixture)*	KELVIN TEMP
SG9-6UC3-Finish-Temp	6" x 1 1/4" x 1/2"	3W	270	2700K, 3000K
SG9-12UC6-Finish-Temp	12" x 1 1/4" x 1/2"	6W	540	2700K, 3000K
SG9-18UC9-Finish-Temp	18" x 1 1/4" x 1/2"	9W	810	2700K, 3000K
SG9-24UC12-Finish-Temp	23 7/8" x 1 1/4" x 1/2"	12W	1080	2700K, 3000K
SG9-30UC15-Finish-Temp	29 3/4" x 1 1/4" x 1/2"	15W	1350	2700K, 3000K
SG9-36UC18-Finish-Temp	35 3/4" x 1 1/4" x 1/2"	18W	1620	2700K, 3000K
SG9-42UC21-Finish-Temp	41 3/4" x 1 1/4" x 1/2"	21W	1890	2700K, 3000K
SG9-48UC24-Finish-Temp	47 3/4" x 1 1/4" x 1/2"	24W	2160	2700K, 3000K

WireWay Colors

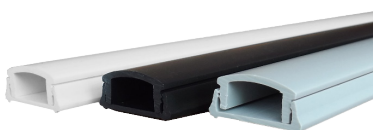

- Wire management system
- Conceals wire from wall to fixture
- Available in Black, Gray, or White

FEATURES

- 50,000 hour LED life at 70% lumen maintenance
- Concealed wire management with hidden poke-home connectors
- Frosted, light-diffusing lens
- Streamlined from WireWay to light
- 3-year limited warranty
- No UV or IR
- Dimmable (with compatible dimmer)

APPLICATIONS

- Under Cabinet Lighting
- Cove Lighting
- Display Lighting

SPECIFICATIONS

Construction Materials: RPVC (mount), extruded aluminum (heat-sink), IR Acrylic (lens)

Wattage: 1/2 Watt LEDs

Color Temp (Kelvin): 2700K (Warm White) or 3000K (Neutral White)

CRI: 90+

LED Beam Angle: 120°

Input Voltage: 15 Volt DC

LED Spacing: 1 1/2"

Mounting: Screws (included)

Max Run: Refer to driver specs

Wiring: 18/2 solid (recommended)

Environment: Dry and damp locations

FINISHES



Black (B)



Gray (G)



White (W)

POWER SUPPLIES

PART NUMBER	DESCRIPTION
TLD-24WSI	24W plug-in 15VDC call for dimming options
TLD-D30WSO	30W hardwire 15VDC
TLD-D45WSO	45W hardwire 15VDC
TLD-D60WSO	60W hardwire 15VDC
TLD-D75WSO	75W hardwire 15VDC

INSTALLATION COMPONENTS

PART NUMBER	DESCRIPTION
SP-20FT-18/2	20 foot spool of 18/2 awg solid wire
SP-50FT-18/2	50 foot spool of 18/2 awg solid wire
SG9-WW-48-Color	48" Field Cuttable WireWay
SG9-WW-MJ12-Color	Miter joint - 45° cuts (2) 12-inch pieces
SG9-IL-CONN	In-line Connector

DIMMING OPTIONS

PART NUMBER	DESCRIPTION
DVELV-300P	300W Diva slide dimmer
DVELV-303P	300W Diva slide dimmer 3-way
MAELV-600-Color	Maestro electronic smart dimmer
MA-R-Color	Preset smart remote (for multiple switching)

Task Lighting retains the right to modify the design of our products without prior notice

